

TRUCOR

Modular Steel Form System

BY VULCRAFT



Better Partners. Better Products. Better Outcomes.


The TruCor service core construction system is *the*

Faster • Cost Competitive • Safer • Higher Quality

alternative to conventional cast-in-place, pre-cast and masonry methods of core construction.

MODULAR CONSTRUCTION


- Factory built cores
- Shipped ready to install
- Minimize costly site time
- Easily stackable
- 12-story capability

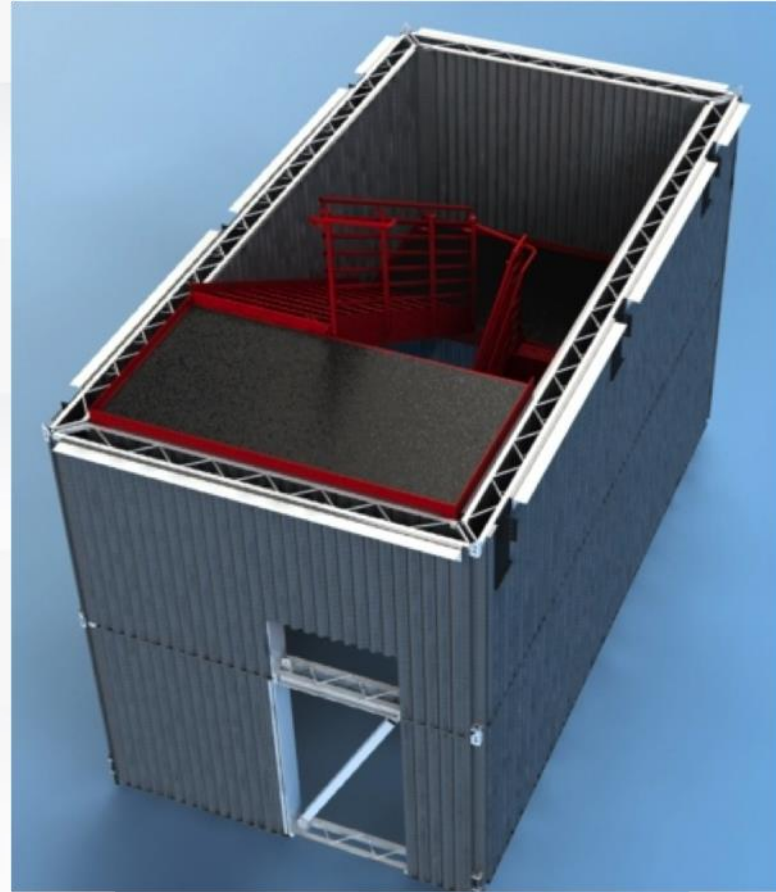

EASY ON-SITE INSTALLATION

- Stair rails ship inside cores
- Begin setting steel right away
- No waiting on core curing



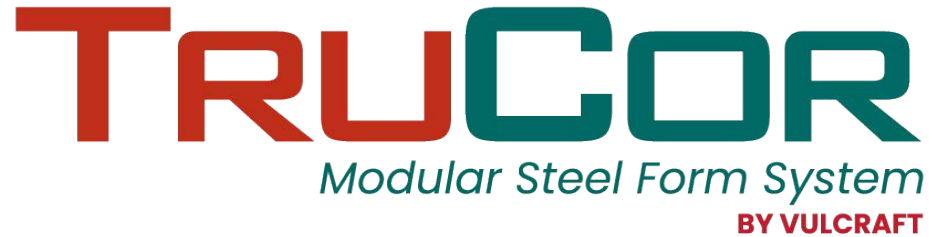

CruCor is already bringing value to several projects.

How can we add value to your projects?

RAPID, SIMPLIFIED ERECTION PROCEDURE





**CONNECTIONS FOR FLOOR AND ROOF FRAMING
ARE PRE-INSTALLED**



FACTORY-BUILT, HIGH TOLERANCE, ALL-STEEL CONSTRUCTION

**SAFER, EARLIER, AND MORE EFFICIENT
TRADE ACCESS TO FLOORS.**

THE TRUCOR PROCESS

1. Stack cores
2. Connect steel + continue erecting the structure
3. Pour concrete inside core walls while you erect



INDUSTRIAL APPLICATIONS

- Stair wells
- Elevator shafts
- TBD



COMMERCIAL + RESIDENTIAL

- Highly effective
- Adds value to any structure
- TBD



MULTIPLE FINISH OPTIONS

- As is, or apply any standard wall finish
- Drywall, laminate, etc.
- The choice is **YOURS**



Choose TruCor, the

Faster • Cost Competitive • Safer • Higher Quality

method of building a service core.