


3NLA-32 / 3NIA-32 / 3PLNA-32 ACOUSTICAL ROOF DECK ACOUSTICAL SOLUTIONS

REDUCE INTERIOR NOISE WITH THE SOUND ABSORPTION CAPABILITIES OF 3NLA-32, 3NIA-32, OR 3PLNA-32 ACOUSTICAL ROOF DECK

- 3NLA-32 Acoustical Deck used with Sidelap Screws
- 3NIA-32 Acoustical Deck used with TSW's or BP's
- 3PLNA-32 Acoustical Deck used the PunchLok® II System

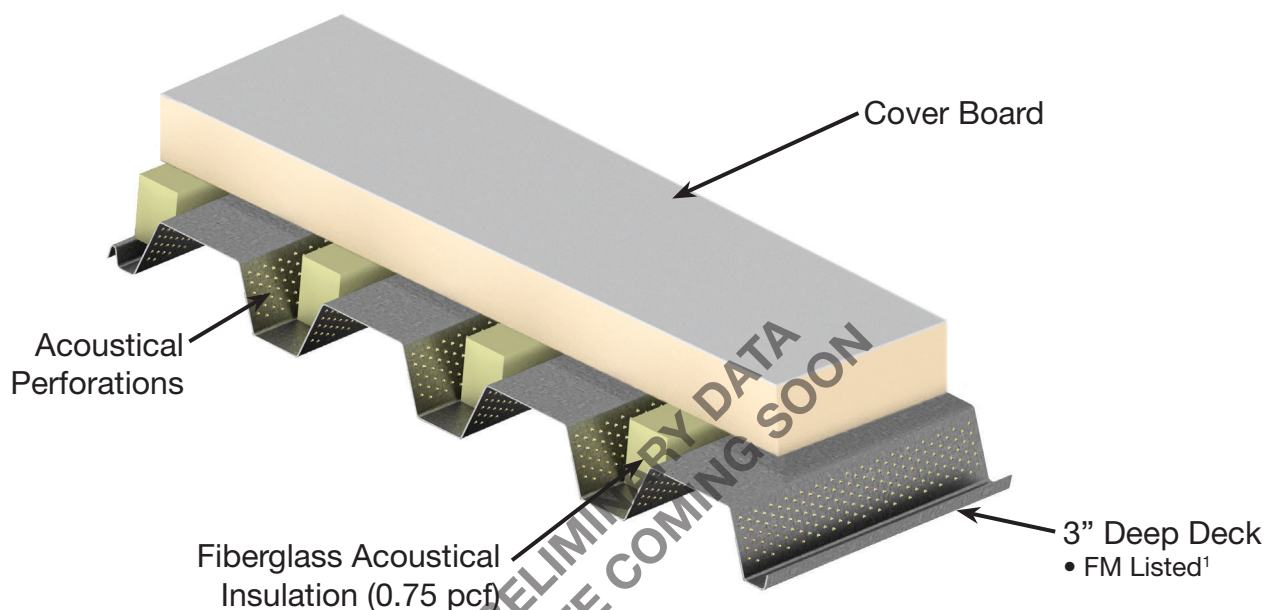

Noise Reduction Coefficients

Cover Board	Deck Insulation	Absorption Coefficients						SSA	NRC	RAL Test No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
2" Poly-Iso	Plain ³	0.19	0.33	0.73	0.83	0.48	0.33	0.59	0.60	A15-130
	Encapsulated	COMING SOON								
2" Fiberglass	Plain ³	0.81	1.16	1.15	0.91	0.47	0.27	0.92	0.90	A15-128
	Encapsulated	COMING SOON								
½" Roof Board	Plain	COMING SOON								
	Encapsulated	COMING SOON								

Notes:

1. See Factory Mutual Approval Report for complete assembly details.
2. The acoustical test reports with complete assembly details are available from www.vulcraft.com.
3. The acoustical data shown for Vulcraft 24" wide 3N deck is believed to be conservative compared to expected test results for 3NL-32, 3NI-32 or 3PLN-32.

The information in this product data sheet is presented for general information only and is not to be used or relied upon for any application without independent verification by a professional engineer or other qualified professional. Nucor Corporation and its affiliates (collectively, "Nucor") expressly disclaim (i) any and all representations, warranties and conditions, express or implied, related to the information in this product data sheet, including but not limited to warranties of merchantability, fitness for a particular purpose, and non-infringement; and (ii) any and all liability whatsoever arising out of or related to this product data sheet or its use, including but not limited to liability by reason of death, personal injury or damage to property.

VULCRAFT and PUNCHLOK are registered trademarks of Nucor.