


VULCRAFT GROUP

PunchLok® II

SYSTEM

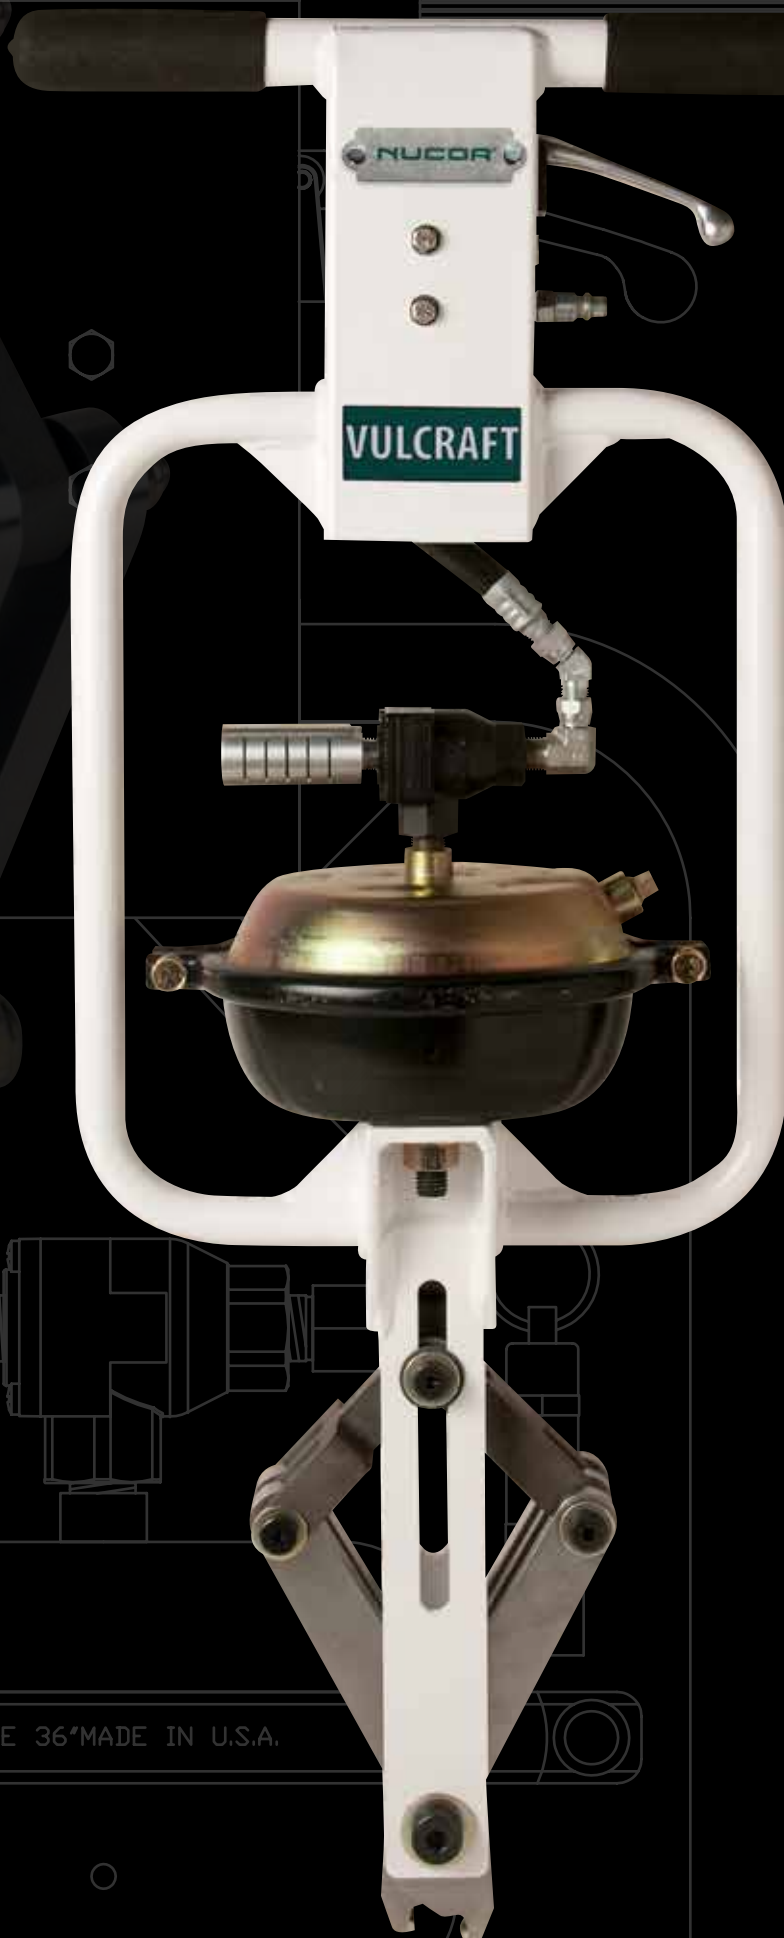

TYPE 36*MADE IN U.S.A.

**LEVERAGING TECHNOLOGY.
CREATING SOLUTIONS.**

PunchLok® II SYSTEM

Vulcraft has been a leading innovator in the steel decking industry since 1977. Steel roof and floor decks have long been recognized for their economy because of their light weight and high strength-to-weight ratio. They provide a durable and attractive roof or floor system for fast all-weather construction. Steel decks also provide excellent lateral diaphragm action thus reducing the necessity for structural bracing, and their incombustible nature assures architects, engineers and owners of excellent fire ratings.

Now Vulcraft introduces the Vulcraft PunchLok II system, which utilizes the PunchLok II tool to achieve higher shear values at less cost through high quality side seam attachments. Used in conjunction with Vulcraft's interlocking products, the pneumatic PunchLok II tool is a fast, effective high volume tool. The PunchLok II tool is manufactured by Verco Decking, Inc., a Nucor Company, exclusively for use with Vulcraft's 1.5PLB™ and 3.0PLN™, 1.5 PLVLI™, 2.0PLVLI™ and 3.0PLVLI™ steel deck. U.S. Patent No. 6,212,932; patent pending. Use in accordance with user manual, product guidelines and appropriate safety measures.

THE PUNCHLOK II SYSTEM PROVIDES POSITIVE AND PERMANENT ATTACHMENT NOT DEGRADED BY FOOT TRAFFIC – PUNCH IT ONCE AND FORGET IT.

SOLID LINKAGE

POWERFUL JAWS PROVIDE A STRONG UNIQUE CRIMPING ACTION OF DECK LAP.

HIGH-STRENGTH JAWS

QUICK EXHAUST
AIR VALVE

AIR POD

REINFORCED
STEEL FRAME

**THE PUNCHLOK II
TOOL CAN BE USED
WITH MINIMUM
EFFORT ON THE
PART OF THE
OPERATOR.**

ACTUATING TRIGGER

AIR SUPPLY

**CONNECTIONS IN SIDE LAP SEAMS ARE ALWAYS CONSISTENT
REGARDLESS OF THE OPERATOR SIZE OR STRENGTH.**



VULCRAFT SIDELAP
CONNECTION 2 (VSC2)



WELD-FREE SYSTEM

ADVANTAGES

- Requires no touch-up from either the topside or the bottom side of the deck.
- Can provide a completely weld-free system when used in conjunction with mechanical fasteners at supports.
- 100% effective from the first attachment of the day to the last attachment of the day.
- 100% accuracy of inspection of the attachment from the topside of the deck.
- Stronger and more effective than conventional button punches.
- Stronger, more effective and more economical than screwed sidelaps.
- Effective on Vulcraft's 1½", 2" and 3" interlocking deck types.



VULCRAFT SIDELAP
CONNECTION 2 (VSC2)

VULCRAFT GROUP

PunchLok® II
SYSTEM

SPECIFICATIONS

Height	38"
Width	16.5"
Diameter	9"
Air Inlet	3/8" x 1/4" MNPT
Recommended Hose Size	1/2"
Weight	50 Lbs.



**LEVERAGING TECHNOLOGY.
CREATING SOLUTIONS.**

www.vulcraft.com



For more information, please contact your Vulcraft Sales Team at
www.vulcraft.com/products/offices.