

# VULCRAFT<sup>®</sup> STEEL DECK

**NUCOR<sup>®</sup>**  
VULCRAFT

# VULCRAFT® DECK SOLUTIONS



Pg.

Catalog Solutions



Web Based Solutions

## General

- 6 Product Offer Information
- 8 Bekaert Steel Fiber Information
- 10 Pour Stop Selection Table
- 12 Non-Composite Slab Design
- 16 Cellular Deck Design Guidance
- 17 Dovetail Deck Finish Options



### Acoustical Solutions

- 20 Acoustical Roof Deck – NRC Ratings
- 26 2.0D Deck-Slab - STC & IIC Ratings
- 30 3.5D Deck-Slab - STC & IIC Ratings



### UL Fire Ratings

- 34 UL Fire Ratings - Roof Deck
- 38 UL Fire Ratings - Floor Deck



### Hanging Solutions

- 58 Sammy X-Press for Roof Deck
- 60 Wedge-Nut for Dovetail Deck-Slab
- 62 Pintale™ Anchor Hanging and Bracing Solutions



### Approvals

- IAPMO UES Report ER-652 for Vulcraft Deck and Deck-Slabs - Download PDF
- IAPMO UES Report ER-423 for Dovetail Deck and Deck-Slabs - Download PDF
- FM Approval Reports - Download PDF



## Roof Deck

### ASD Roof Deck (Properties and Vertical Load Tables)

- 66 2.0D Dovetail Roof Deck
- 68 3.5D Dovetail Roof Deck
- 70 2.0DS Dovetail Roof Deck
- 72 2.0DF Dovetail Roof Deck
- 74 3.5DS Dovetail Roof Deck
- 76 3.5DF Dovetail Roof Deck
- 78 1.5B-36/1.5BI-36/1.5PLB-36 GR50 Roof Deck
- 80 1.5B-36/1.5BI-36/1.5PLB-36 GR80 Roof Deck
- 82 3NL-32/3NI-32/3PLN-32 GR50 Roof Deck
- 84 3NL-32/3NI-32/3PLN-32 GR80 Roof Deck
- 86 3N-24/3NI-24 Roof Deck
- 88 2.0DA Dovetail Acoustical Roof Deck
- 90 3.5DA Dovetail Acoustical Roof Deck
- 92 2.0DS AC Acoustical Dovetail Roof Deck
- 94 2.0DF AC Acoustical Dovetail Roof Deck
- 96 3.5DS AC Acoustical Dovetail Roof Deck
- 98 3.5DF AC Acoustical Dovetail Roof Deck



# VULCRAFT® DECK SOLUTIONS



Pg.

Catalog Solutions



Web Based Solutions

---

## Roof Deck



100	1.5BA-36/1.5BIA-36/1.5PLBA-36 GR50 Acoustical Roof Deck
102	1.5BA-36/1.5BIA-36/1.5PLBA-36 GR50 Acoustical Roof Deck
104	3NLA-32/3NIA-32/3PLNA-32 GR50 Acoustical Roof Deck
106	3NLA-32/3NIA-32/3PLNA-32 GR80 Acoustical Roof Deck
108	3NA-24/3NIA-24 Acoustical Roof Deck

---

## Composite Deck

### ASD Composite Deck (Properties and Superimposed Load Tables)



113	2.0D Dovetail Deck-Slab
117	3.5D Dovetail Deck-Slab
121	2.0DS FL Dovetail Deck-Slab
125	2.0DF FL Dovetail Deck-Slab
129	3.5DS FL Dovetail Deck-Slab
133	3.5DF FL Dovetail Deck-Slab
137	1.5VL-36/1.5VLI-36/1.5PLVLI-36 Composite Deck-Slab
141	1.5VLR-36 Composite Deck-Slab
145	2VLI-36/2VLJ-36/2PLVLI-36 Composite Deck-Slab
149	3VLI-36/3VLJ-36/3PLVLI-36 Composite Deck-Slab

---

## Non-Composite Deck

### ASD Non-Composite Deck (Properties and Vertical Load Tables)



154	0.6C-30/0.6C-35 Non-Composite Deck
156	0.6C-36 Non-Composite Deck
158	1.0C-32 Non-Composite Deck
160	1.0C-33 Non-Composite Deck
162	1.0C-36 Non-Composite Deck
164	1.3C-32 Non-Composite Deck
166	1.5C-36 Non-Composite Deck
168	2C-36 Non-Composite Deck
170	3C-36 Non-Composite Deck

---


## Cellular Deck

### ASD Cellular Deck (Properties Tables)



174	1.5BP-36/1.5PLBP-36/1.5VLP-36/1.5PLVLP-36 Cellular Deck
175	1.5BPA-36/1.5PLBPA-36/1.5VLP-36/1.5PLVLP-36 Acoustical Cellular Deck
176	3NP-32/3PLNP-32 Cellular Deck
177	3NPA-32/3PLNPA-32 Acoustical Cellular Deck
178	3NP-24 Cellular Deck
179	3NPA-24 Acoustical Cellular Deck
180	2VLP-36/2PLVLP-36 Cellular Deck
181	2VLP-36/2PLVLP-36 Acoustical Cellular Deck
182	3VLP-36/3PLVLP-36 Cellular Deck
183	3VLP-36/3PLVLP-36 Acoustical Cellular Deck

---

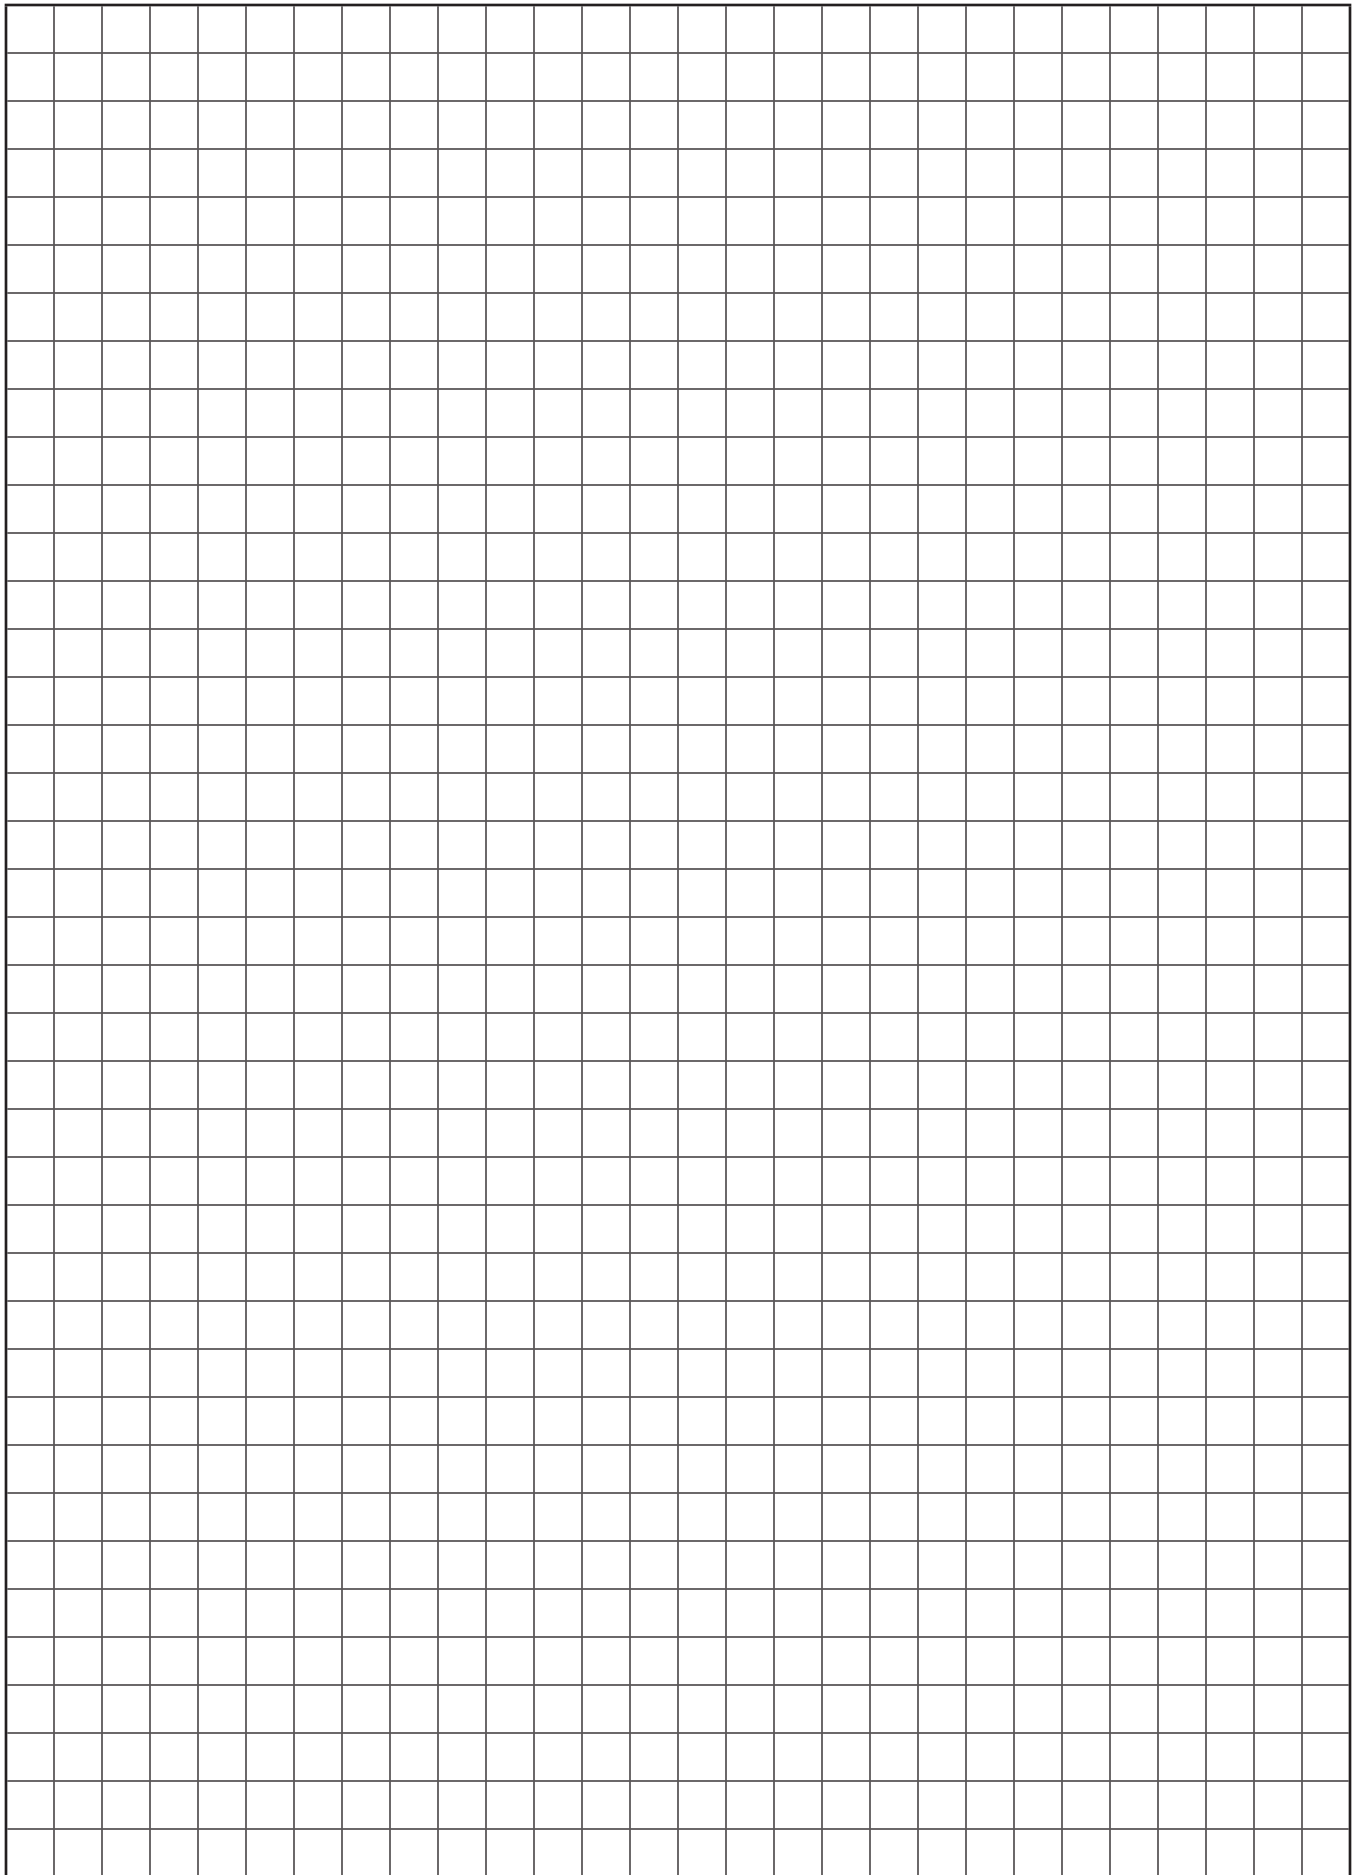



# GENERAL

# VULCRAFT® DECK PRODUCT OFFER

## ROOF DECKS

### 1.5B ROOF DECKS

COVER WIDTHS: 30", 36"

GAGES: 24, 22, 20, 19, 18, 16



### 32" WIDE 3N ROOF DECKS

COVER WIDTH: 32"


GAGES: 22, 20, 19, 18, 16



### 24" WIDE 3N ROOF DECKS

COVER WIDTH: 24"

GAGES: 22, 20, 19, 18, 16




## DOVETAIL DECKS

### 2.0DS DOVETAIL DECKS

COVER WIDTH: 30"


GAGES: 22, 20, 18, 16



### 3.5DS DOVETAIL DECKS

COVER WIDTH: 24"


GAGES: 20, 18, 16



### 2.0DF DOVETAIL DECKS

COVER WIDTH: 30"


GAGES: 20, 18, 16



### 3.5DF DOVETAIL DECKS

COVER WIDTH: 24"


GAGES: 18, 16



### 2.0D DOVETAIL DECKS

COVER WIDTH: 24.5"


GAGES: 22, 20, 19, 18, 16



### 3.5D DOVETAIL DECKS

COVER WIDTH: 24"

GAGES: 20, 19, 18, 16




## COMPOSITE DECKS

### 1.5VL COMPOSITE DECKS

COVER WIDTH: 36"


GAGES: 22, 20, 19, 18, 16



### 1.5VLR COMPOSITE DECKS

COVER WIDTH: 36"


GAGES: 22, 20, 19, 18, 16



### 2VLI COMPOSITE DECKS

COVER WIDTH: 36"


GAGES: 22, 20, 19, 18, 16



### 3VLI COMPOSITE DECKS

COVER WIDTH: 36"

GAGES: 22, 20, 19, 18, 16





# VULCRAFT® DECK PRODUCT OFFER

## NON-COMPOSITE DECKS

### 0.6C NON-COMPOSITE DECKS

COVER WIDTHS: 30", 35", 36"


GAGES: 28, 26, 24, 22



### 1.0C NON-COMPOSITE DECKS

COVER WIDTHS: 32", 33", 36"


GAGES: 26, 24, 22, 20



### 1.3C NON-COMPOSITE DECKS

COVER WIDTH: 32"



GAGES: 26, 24, 22, 20



### 1.5C NON-COMPOSITE DECKS

COVER WIDTHS: 30", 36"



GAGES: 24, 22, 20, 18



### 2C NON-COMPOSITE DECKS

COVER WIDTH: 36"



GAGES: 22, 20, 18, 16



### 3C NON-COMPOSITE DECKS

COVER WIDTH: 36"

GAGES: 22, 20, 18, 16





## CELLULAR DECK PRODUCT OFFER

### 1.5BP CELLULAR DECKS

COVER WIDTH: 24", 36"



GAGES: 20/20, 20/18, 18/20, 18/18,  
18/16, 16/18, 16/16



### 1.5VLP CELLULAR DECKS

COVER WIDTH: 24", 36"



GAGES: 20/20, 20/18, 18/20, 18/18,  
18/16, 16/18, 16/16



### 32" WIDE 3NP CELLULAR DECKS

COVER WIDTH: 32"



GAGES: 20/20, 20/18, 18/20, 18/18,  
18/16, 16/18, 16/16



### 24" WIDE 3NP CELLULAR DECKS

COVER WIDTH: 24"



GAGES: 20/20, 20/18, 18/20, 18/18,  
18/16, 16/18, 16/16



### 2VLP CELLULAR DECKS

COVER WIDTH: 24", 36"



GAGES: 20/20, 20/18, 18/20, 18/18,  
18/16, 16/18, 16/16




### 3VLP CELLULAR DECKS

COVER WIDTH: 24", 36"

GAGES: 20/20, 20/18, 18/20, 18/18,  
18/16, 16/18, 16/16



# VULCRAFT® COMPOSITE DECKS with BEKAERT DRAMIX® STEEL FIBERS

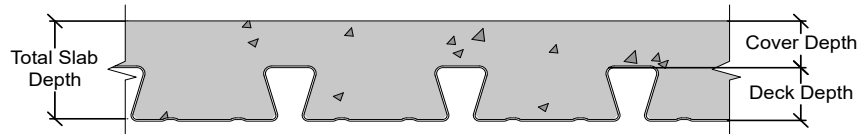

## Minimum Reinforcing Options for Temperature and Shrinkage $f'_c = 3000$ psi

Cover Depth (in.)	Min. $A_s$ for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
		WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> ) 4D 65/60BG
<b>Normal Weight Concrete (145 pcf)</b>			
2	0.028	6x6-W1.4xW1.4	23
2¼	0.028	6x6-W1.4xW1.4	20
2½	0.028	6x6-W1.4xW1.4	18
2¾	0.028	6x6-W1.4xW1.4	16
3	0.028	6x6-W1.4xW1.4	15
3¼	0.029	6x6-W2.1xW2.1	15
3½	0.032	6x6-W2.1xW2.1	15
3¾	0.034	6x6-W2.1xW2.1	15
4	0.036	6x6-W2.1xW2.1	15
4¼	0.038	6x6-W2.1xW2.1	15
4½	0.041	6x6-W2.1xW2.1	15
4¾	0.043	6x6-W2.9xW2.9	15
5	0.045	6x6-W2.9xW2.9	15
6	0.054	6x6-W2.9xW2.9	15
<b>Light Weight Concrete (110 pcf)</b>			
2	0.028	6x6-W1.4xW1.4	33
2¼	0.028	6x6-W1.4xW1.4	28
2½	0.028	6x6-W1.4xW1.4	25
2¾	0.028	6x6-W1.4xW1.4	22
3	0.028	6x6-W1.4xW1.4	20
3¼	0.029	6x6-W2.1xW2.1	20
3½	0.032	6x6-W2.1xW2.1	20
3¾	0.034	6x6-W2.1xW2.1	20
4	0.036	6x6-W2.1xW2.1	20
4¼	0.038	6x6-W2.1xW2.1	20
4½	0.041	6x6-W2.1xW2.1	20
4¾	0.043	6x6-W2.9xW2.9	20
5	0.045	6x6-W2.9xW2.9	20
6	0.054	6x6-W2.9xW2.9	20


### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.


For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).

# VULCRAFT® COMPOSITE DECKS with BEKAERT DRAMIX® STEEL FIBERS



## 3½" Deep Decks




## 3" Deep Decks

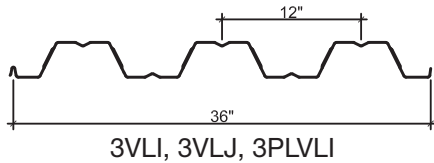

## 2" Deep Decks

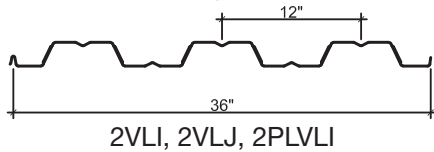


## 1½" Deep Decks



## Composite Deck Slab

Total Slab Depth (in.)	Cover Depth (in.)			
	3½" Deep Decks	3" Deep Decks	2" Deep Decks	1½" Deep Decks
	<b>Vulcraft Composite Decks</b>			
	3.5DS, 3.5DF	3VLI, 3VLJ, 3PLVLI	2VLI, 2VLJ, 2PLVLI, 2.0DS, 2.0DF	1.5VL, 1.5VLI, 1.5PLVLI, 1.5VLR
3 1/2	-	-	-	2
3 3/4	-	-	-	2 1/4
4	-	-	2	2 1/2
4 1/4	-	-	2 1/4	2 3/4
4 1/2	-	-	2 1/2	3
4 3/4	-	-	2 3/4	3 1/4
5	-	2	3	3 1/2
5 1/4	-	2 1/4	3 1/4	3 3/4
5 1/2	2	2 1/2	3 1/2	4
5 3/4	2 1/4	2 3/4	3 3/4	4 1/4
6	2 1/2	3	4	4 1/2
6 1/4	2 3/4	3 1/4	4 1/4	4 3/4
6 1/2	3	3 1/2	4 1/2	5
6 3/4	3 1/4	3 3/4	4 3/4	5 1/4
7	3 1/2	4	5	5 1/2
7 1/4	3 3/4	4 1/4	5 1/4	5 3/4
7 1/2	4	4 1/2	5 1/2	6
7 3/4	4 1/4	4 3/4	5 3/4	-
8	4 1/2	5	6	-
9	5 1/2	6	-	-
9 1/2	6	-	-	-

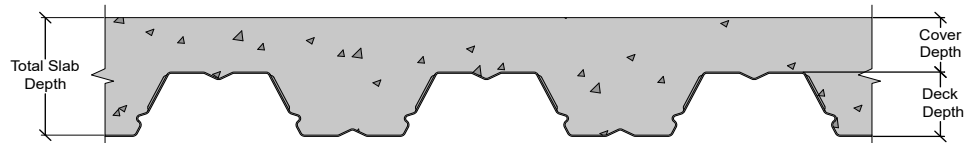

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.


NUCOR, VULCRAFT, VERCO, and FORMLOK are registered trademarks of Nucor. DRAMIX is a registered trademark of Bekaert.

# SDI POUR STOP SELECTION



## Pour Stop Gage

Slab Depth (in.)	Overhang (in.)													Design Thickness (in.)		
	0	1	2	3	4	5	6	7	8	9	10	11	12			
4.00	20	20	20	20	18	18	16	14	12	12	12	10	10			
4.25	20	20	20	18	18	16	16	14	12	12	12	10	10			
4.50	20	20	20	18	18	16	16	14	12	12	12	10	10			
4.75	20	20	18	18	16	16	14	14	12	12	10	10	10			
5.00	20	20	18	18	16	16	14	14	12	12	10	10				
5.25	20	18	18	16	16	14	14	12	12	12	10	10				
5.50	20	18	18	16	16	14	14	12	12	12	10	10				
5.75	20	18	16	16	14	14	12	12	12	12	10	10				
6.00	18	18	16	16	14	14	12	12	12	10	10	10				
6.25	18	18	16	14	14	12	12	12	12	10	10					
6.50	18	16	16	14	14	12	12	12	12	10	10					
6.75	18	16	14	14	14	12	12	12	10	10	10					
7.00	18	16	14	14	12	12	12	12	10	10	10					
7.25	16	16	14	14	12	12	12	10	10	10						
7.50	16	14	14	12	12	12	12	10	10	10						
7.75	16	14	14	12	12	12	10	10	10	10						
8.00	14	14	12	12	12	12	10	10	10							
8.25	14	14	12	12	12	10	10	10	10							
8.50	14	12	12	12	12	10	10	10								
8.75	14	12	12	12	12	10	10	10								
9.00	14	12	12	12	10	10	10									
9.25	12	12	12	12	10	10	10									
9.50	12	12	12	10	10	10										
9.75	12	12	12	10	10	10										
10.00	12	12	10	10	10	10										
10.25	12	12	10	10	10											
10.50	12	12	10	10	10											
10.75	12	10	10	10												
11.00	12	10	10	10												
11.25	12	10	10													
11.50	10	10	10													
11.75	10	10														
12.00	10	10														

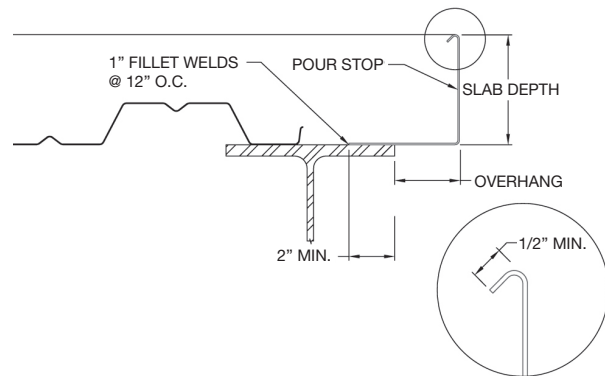

**NOTES:**

1. Normal weight concrete 150 PCF
2. Horizontal and vertical deflection is limited to 1/4" maximum for dead load
3. Design stress is limited to 20 KSI for concrete dead load temporarily increased by one-third for construction live load of 20 PSF
4. Pour Stop Selection Chart does not consider the effect of performance, deflection, or rotation of the pour stop support which may include both the supporting deck and/or the frame
5. Vertical leg return lip is recommended for all gages
6. This selection table is not meant to replace the judgment of experienced structural engineers and should be considered as a reference only


# DECK ACCESSORIES

## PROFILE CLOSURES

Profile closures made from steel or neoprene are designed to fit Vulcraft's deck products. See table below for availability of closures by deck profile. Steel closures are 20 gage with a 1 in. return lip for fastening to deck with screws or tack welds. Neoprene closures for decks are 1 in. thick strips except for dovetail decks and 32" wide N deck, those are individual plugs. Dovetail Air Dams are 48" thick. These closures are not intended to be used as concrete closures or stops.

### Availability of Profile Closures

Deck Profile	Steel Closures		Neoprene Closures		
	Underside	Topside	Underside	Topside	Air Dam
1.5B-36 / 1.5VL-36	✓	✓	✓	✓	
3NL-32 / 3NI-32	✓	✓	✓	✓	
3N-24 / 3NI-24	✓	✓	✓	✓	
2VLI-36	✓		✓		
3VLI-36	✓		✓		
2.0DS-30 / 2.0DF-30	✓	✓	✓	✓	✓
3.5DS-24 / 3.5DF-24	✓	✓	✓	✓	✓
1.0C	✓	✓	✓	✓	
0.6C			✓	✓	

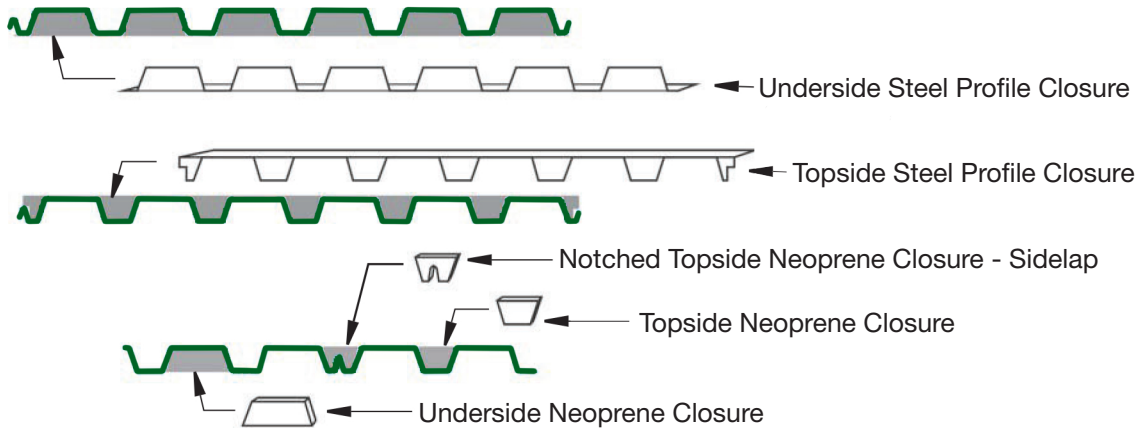


Note: B deck closures shown; closures for other profiles are installed similarly.


## END CLOSURES / BREAK-FORMED ACCESSORIES

Standard steel end (cell) closures are available for all profiles. End closures for all decks are 20 gage.

Consult your Vulcraft District Sales Manager regarding the availability of non-standard accessories.



# NON-COMPOSITE SLAB DESIGN

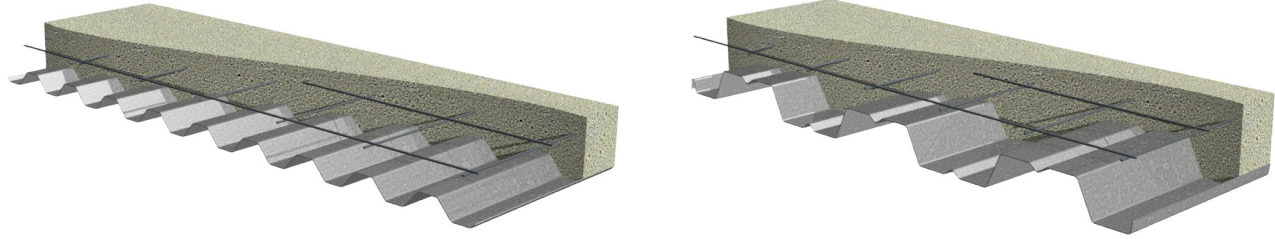

## Design Notes for Reinforced Concrete Slabs

**Concrete Design** - Design of concrete slabs in accordance with ACI is the responsibility of the structural engineer of record. Values listed in these tables are provided as an aid in selecting the appropriate deck and Vulcraft does not assume responsibility for the design of the slab.

**Temperature and Shrinkage Reinforcing** - Temperature and shrinkage effects in the concrete shall be controlled by methods permitted by ACI 318. The designer shall be permitted to consider only the area of concrete above the deck.

**Shoring** - Slabs temporarily shored during construction must deduct the weight of the slab from the calculated capacity of the reinforced concrete slab.

**Deck Finish** - Galvanized form deck can be considered a permanent support in most applications. When uncoated or painted deck is used, the weight of the concrete slab shall be deducted from the calculated capacity of the reinforced concrete slab.


**Allowable Slab Loads** - These tables are based on an interior three span condition using moment coefficients from ACI 318- 14 Section 6.5.2. Moment coefficients must be adjusted for end spans, single spans, or double spans.

$f'_c = 3,000 \text{ psi}$	$\phi = 0.90$	$b = 12 \text{ in}$	$+ M = (W L^2)/16$	$+ M_c = T (d-a/2)/12$
$f_y = 60,000 \text{ psi}$	$T = A_s f_y$	$a = T/0.85 f'_c b$	$- M = (W L^2 (L \leq 10 \text{ ft.}))/12$	$- M_c = T (d-na)/12$
			$- M = (W L^2 (L > 10 \text{ ft.}))/10$	$M_L = \phi M_c/1.6$

**Serviceability** - Tabulated values are not evaluated for deflection.

**Span Ratio** - The tabulated concrete cover thicknesses (t) for the table values shown meet the ratio of span/28 per ACI 318-14 Section 7.3.1.5.

**Reinforcing Placement** - Reinforcing shall be located at center of topping.

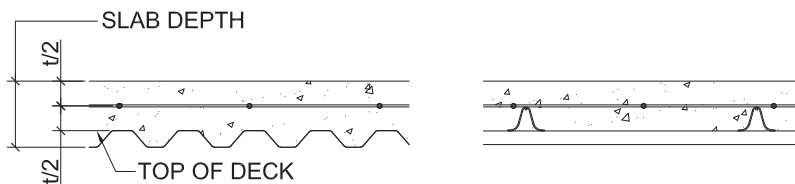

**Venting Non-Composite Deck** - Check with Vulcraft representative for availability.



**SLOT VENTS**

- 0.6C, 1.0C and 1.3C – Do not include slot vents in bottom flange. Sidelap vents optional.
- 0.6CSV, 1.0CSV and 1.3CSV – Specify if bottom flange slot vents are required.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# REINFORCED CONCRETE SLABS ON NC DECK

## ALLOWABLE SUPERIMPOSED UNIFORM LOADS (psf) FOR 0.6C DECK

3 Span Condition

Slab Depth		Reinforcement		Clear Span (ft-in.)											
Total	Topping	WWR	A <sub>s</sub>	2'-0"	2'-3"	2'-6"	2'-9"	3'-0"	3'-3"	3'-6"	3'-9"	4'-0"	4'-6"	5'-0"	
2"	1½"	6x6-W2.1xW2.1	0.042	251	198	161	133	112	95	82					
		6x6-W2.9xW2.9	0.058	339	268	217	179	151	128	111					
		6x6-W4.0xW4.0	0.080	400	358	290	240	201	172	148					
2½"	2"	6x6-W2.9xW2.9	0.058	400	365	295	244	205	175	151	131	115	91		
		6x6-W4.0xW4.0	0.080	400	400	398	329	276	236	203	177	156	123		
		4x4-W2.9xW2.9	0.087	400	400	400	355	298	254	219	191	168	133		
3"	2½"	6x6-W2.9xW2.9	0.058	400	400	374	309	260	221	191	166	146	115	93	
		6x6-W4.0xW4.0	0.080	400	400	400	400	351	299	258	225	198	156	127	
		4x4-W2.9xW2.9	0.087	400	400	400	400	380	324	279	243	214	169	137	
3½"	3"	6x6-W4.0xW4.0	0.080	400	400	400	400	400	363	313	273	240	190	154	
		4x4-W2.9xW2.9	0.087	400	400	400	400	400	393	339	295	260	205	166	
		4x4-W4.0xW4.0	0.120	400	400	400	400	400	400	400	398	350	276	224	
4"	3½"	6x6-W4.0xW4.0	0.080	400	400	400	400	400	400	368	321	282	223	181	
		4x4-W2.9xW2.9	0.087	400	400	400	400	400	400	399	348	305	241	196	
		4x4-W4.0xW4.0	0.120	400	400	400	400	400	400	400	400	400	326	264	
4½"	4"	4x4-W2.9xW2.9	0.087	400	400	400	400	400	400	400	400	351	278	225	
		4x4-W4.0xW4.0	0.120	400	400	400	400	400	400	400	400	400	376	305	
		#3 @ 9" o.c.	0.147	400	400	400	400	400	400	400	400	400	400	368	

## ALLOWABLE SUPERIMPOSED UNIFORM LOADS (psf) FOR 1.0C DECK

3 Span Condition

Slab Depth		Reinforcement		Clear Span (ft-in.)											
Total	Topping	WWR	A <sub>s</sub>	3'-0"	3'-3"	3'-6"	3'-9"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	
2½"	1½"	6x6-W2.1xW2.1	0.042	112	95	82	71								
		6x6-W2.9xW2.9	0.058	151	128	111	96								
		6x6-W4.0xW4.0	0.080	201	172	148	129								
3"	2"	6x6-W2.9xW2.9	0.058	205	175	151	131	115	91						
		6x6-W4.0xW4.0	0.080	276	236	203	177	156	123						
		4x4-W4.0xW4.0	0.120	397	338	292	254	223	176						
3½"	2½"	6x6-W2.9xW2.9	0.058	260	221	191	166	146	115	93	77				
		6x6-W4.0xW4.0	0.080	351	299	258	225	198	156	127	105				
		4x4-W4.0xW4.0	0.120	400	400	374	326	287	226	183	152				
4"	3"	6x6-W4.0xW4.0	0.080	400	363	313	273	240	190	154	127	107	91	78	
		4x4-W2.9xW2.9	0.087	400	393	339	295	260	205	166	137	115	98	85	
		4x4-W4.0xW4.0	0.120	400	400	400	398	350	276	224	185	156	133	114	
4½"	3½"	6x6-W4.0xW4.0	0.080	400	400	368	321	282	223	181	149	125	107	92	
		4x4-W2.9xW2.9	0.087	400	400	399	348	305	241	196	162	136	116	100	
		4x4-W4.0xW4.0	0.120	400	400	400	400	400	326	264	219	184	156	135	
5"	4"	4x4-W2.9xW2.9	0.087	400	400	400	400	351	278	225	186	156	133	115	
		4x4-W4.0xW4.0	0.120	400	400	400	400	400	376	305	252	212	180	156	
		#3 @ 9" o.c.	0.147	400	400	400	400	400	400	368	304	256	218	188	

# REINFORCED CONCRETE SLABS ON NC DECK

## ALLOWABLE SUPERIMPOSED UNIFORM LOADS (psf) FOR 1.3C DECK

3 Span Condition

Slab Depth		Reinforcement		Clear Span (ft-in.)										
Total	Topping	WWR	A <sub>s</sub>	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"
3 <sup>5</sup> / <sub>16</sub> "	2"	6x6-W2.9xW2.9	0.058	115	91									
		6x6-W4.0xW4.0	0.080	156	123									
		4x4-W2.9xW2.9	0.087	168	133									
3 <sup>13</sup> / <sub>16</sub> "	2½"	6x6-W2.9xW2.9	0.058	146	115	93	77							
		6x6-W4.0xW4.0	0.080	198	156	127	105							
		4x4-W2.9xW2.9	0.087	214	169	137	113							
4 <sup>5</sup> / <sub>16</sub> "	3"	6x6-W4.0xW4.0	0.080	240	190	154	127	107	91	78				
		4x4-W2.9xW2.9	0.087	260	205	166	137	115	98	85				
		4x4-W4.0xW4.0	0.120	350	276	224	185	156	133	114				
4 <sup>13</sup> / <sub>16</sub> "	3½"	6x6-W4.0xW4.0	0.080	282	223	181	149	125	107	92	80	71		
		4x4-W2.9xW2.9	0.087	305	241	196	162	136	116	100	87	76		
		4x4-W4.0xW4.0	0.120	400	326	264	219	184	156	135	118	103		
5 <sup>5</sup> / <sub>16</sub> "	4"	4x4-W2.9xW2.9	0.087	351	278	225	186	156	133	115	100	88	78	69
		4x4-W4.0xW4.0	0.120	400	376	305	252	212	180	156	136	119	106	94
		#3 @ 9" o.c.	0.147	400	400	368	304	256	218	188	164	144	127	114
5 <sup>13</sup> / <sub>16</sub> "	4½"	4x4-W4.0xW4.0	0.120	400	400	345	285	240	204	176	154	135	120	107
		#3 @ 9" o.c.	0.147	400	400	400	345	290	247	213	186	163	145	129
		#4 @ 12" o.c.	0.196	400	400	400	400	378	322	278	242	213	188	168

## ALLOWABLE SUPERIMPOSED UNIFORM LOADS (psf) FOR 1.5C DECK

3 Span Condition

Slab Depth		Reinforcement		Clear Span (ft-in.)										
Total	Topping	WWR	A <sub>s</sub>	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"
3½"	2"	6x6-W2.9xW2.9	0.058	115	91									
		6x6-W4.0xW4.0	0.080	156	123									
		4x4-W2.9xW2.9	0.087	168	133									
4"	2½"	6x6-W2.9xW2.9	0.058	146	115	93	77							
		6x6-W4.0xW4.0	0.080	198	156	127	105							
		4x4-W2.9xW2.9	0.087	214	169	137	113							
4½"	3"	6x6-W4.0xW4.0	0.080	240	190	154	127	107	91	78				
		4x4-W2.9xW2.9	0.087	260	205	166	137	115	98	85				
		4x4-W4.0xW4.0	0.120	350	276	224	185	156	133	114				
5"	3½"	6x6-W4.0xW4.0	0.080	282	223	181	149	125	107	92	80	71		
		4x4-W2.9xW2.9	0.087	305	241	196	162	136	116	100	87	76		
		4x4-W4.0xW4.0	0.120	400	326	264	219	184	156	135	118	103		
5½"	4"	4x4-W2.9xW2.9	0.087	351	278	225	186	156	133	115	100	88	78	69
		4x4-W4.0xW4.0	0.120	400	376	305	252	212	180	156	136	119	106	94
		#3 @ 9" o.c.	0.147	400	400	368	304	256	218	188	164	144	127	114
6"	4½"	4x4-W4.0xW4.0	0.120	400	400	345	285	240	204	176	154	135	120	107
		#3 @ 9" o.c.	0.147	400	400	400	345	290	247	213	186	163	145	129
		#4 @ 12" o.c.	0.196	400	400	400	400	378	322	278	242	213	188	168

# REINFORCED CONCRETE SLABS ON NC DECK

## ALLOWABLE SUPERIMPOSED UNIFORM LOADS (psf) FOR 2C DECK

3 Span Condition


Slab Depth		Reinforcement		Clear Span (ft-in.)										
Total	Topping	WWR	A <sub>s</sub>	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"
4½"	2½"	6x6-W2.9xW2.9	0.058	93	77									
		6x6-W4.0xW4.0	0.080	127	105									
		4x4-W2.9xW2.9	0.087	137	113									
5"	3"	6x6-W2.9xW2.9	0.058	113	93	78	67	58						
		6x6-W4.0xW4.0	0.080	154	127	107	91	78						
		4x4-W2.9xW2.9	0.087	166	137	115	98	85						
5½"	3½"	6x6-W4.0xW4.0	0.080	181	149	125	107	92	80	71				
		4x4-W2.9xW2.9	0.087	196	162	136	116	100	87	76				
		4x4-W4.0xW4.0	0.120	264	219	184	156	135	118	103				
6"	4"	4x4-W2.9xW2.9	0.087	225	186	156	133	115	100	88	78	69		
		4x4-W4.0xW4.0	0.120	305	252	212	180	156	136	119	106	94		
		#3 @ 9" o.c.	0.147	368	304	256	218	188	164	144	127	114		
6½"	4½"	4x4-W4.0xW4.0	0.120	345	285	240	204	176	154	135	120	107	96	86
		#3 @ 9" o.c.	0.147	400	345	290	247	213	186	163	145	129	116	104
		#4 @ 12" o.c.	0.196	400	400	378	322	278	242	213	188	168	151	136
7"	5"	4x4-W4.0xW4.0	0.120	386	319	268	228	197	172	151	134	119	107	96
		#3 @ 9" o.c.	0.147	400	386	325	277	239	208	183	162	144	130	117
		#4 @ 12" o.c.	0.196	400	400	400	361	312	271	239	211	188	169	153

## ALLOWABLE SUPERIMPOSED UNIFORM LOADS (psf) FOR 3C DECK

3 Span Condition

Slab Depth		Reinforcement		Clear Span (ft-in.)										
Total	Topping	WWR	A <sub>s</sub>	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"	10'-6"	11'-0"	11'-6"
5"	2"	6x6-W2.9xW2.9	0.058	44	38	33	29	26	23					
		6x6-W4.0xW4.0	0.080	59	51	44	39	34	31					
		4x4-W2.9xW2.9	0.087	64	55	48	42	37	33					
5½"	2½"	6x6-W2.9xW2.9	0.058	55	48	42	36	32	29	26	23			
		6x6-W4.0xW4.0	0.080	75	65	56	49	44	39	35	32			
		4x4-W4.0xW4.0	0.120	109	94	82	72	63	57	51	46			
6"	3"	6x6-W4.0xW4.0	0.080	91	78	68	60	53	47	43	38	29	26	24
		4x4-W2.9xW2.9	0.087	98	85	74	65	57	51	46	42	31	29	26
		4x4-W4.0xW4.0	0.120	133	114	100	87	77	69	62	56	42	39	35
6½"	3½"	6x6-W4.0xW4.0	0.080	107	92	80	71	62	56	50	45	34	31	28
		4x4-W2.9xW2.9	0.087	116	100	87	76	68	60	54	49	37	34	31
		4x4-W4.0xW4.0	0.120	156	135	118	103	92	82	73	66	50	46	42
7"	4"	4x4-W2.9xW2.9	0.087	133	115	100	88	78	69	62	56	42	39	35
		4x4-W4.0xW4.0	0.120	180	156	136	119	106	94	84	76	58	53	48
		#3 @ 9" o.c.	0.147	218	188	164	144	127	114	102	92	70	63	58
7½"	4½"	4x4-W4.0xW4.0	0.120	204	176	154	135	120	107	96	86	65	59	54
		#3 @ 9" o.c.	0.147	247	213	186	163	145	129	116	104	79	72	66
		#4 @ 12" o.c.	0.196	322	278	242	213	188	168	151	136	103	94	86


# CELLULAR DECK DESIGN GUIDANCE

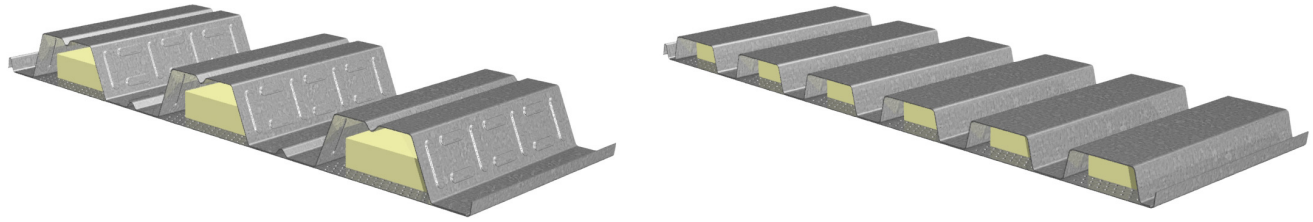

## CELLULAR DECK DESIGN

Cellular and cellular acoustical decks may be designed for out-of-plane loads, shoring and diaphragm loads based on the published properties. Superimposed loads are based on the profile and gage of the fluted top section.

Cellular and cellular acoustical decks may be designed based on their fluted top sections ignoring the contribution of the bottom pan, in accordance with the guidelines below. Please contact your Vulcraft representative if more detailed information is required.

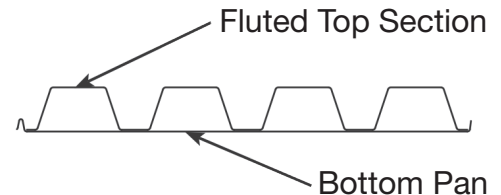

### Cellular Roof Decks

- **Out-of-Plane Loads:** Cellular and cellular acoustical decks may be designed for out-of-plane loads based on fluted deck of the same gage and profile as the fluted top section of the cellular deck.
- **Diaphragm Design:** Diaphragm shear strength and stiffness for cellular and cellular acoustical decks may be based on fluted deck of the same profile as the fluted top section but with the gage of the bottom pan.

### Cellular Composite Decks

- **Unshored Clear Spans:** Determination of maximum unshored clear spans of cellular and cellular acoustical decks may be based on fluted deck of the same gage and profile as the fluted top section of the cellular deck.

### Cellular Composite Deck-Slabs

- **Superimposed Loads:** Superimposed loads for cellular composite and cellular acoustical composite decks with a given concrete type and thickness are based on composite deck of the same profile, gage and concrete as the fluted top section of the cellular deck.
- **Diaphragm Design:** Diaphragm shear strength and stiffness for cellular composite and cellular acoustical composite decks with a given concrete type and thickness may be based on fluted composite deck of the same profile as the fluted top section but with the gage of the bottom pan.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# DOVETAIL DECK FINISH SOLUTIONS

## MULTIPLE DOVETAIL DECK FINISHES PROVIDE FREEDOM TO CHOOSE THE RIGHT SOLUTION FOR YOUR PROJECT

### VISION ↓

Accentuate the sleek lines of Dovetail deck with factory applied standard white finish paint or the custom color of your choice.

### SPECIFY ↓

Enhanced 2-coat polyester paint

### SOLUTION ↓

Enhanced 2-Coat polyester paint is factory applied to chemically cleaned and pre-treated G90 galvanized steel prior to roll forming steel deck. Select from manufacturer's standard off-white (Sherwin-Williams PMW7512) or a wide range of custom colors. Color-matched aerosol touch-up paint is available.

Follow your vision, choose any color or texture imaginable with the field applied finish paint system of your choice on Dovetail deck.

Primer Paint

Factory applied oven-cured polyester primer paint on chemically cleaned and pre-treated G90 galvanized steel ensures a high quality finish. Primer paint provided in manufacturer's standard off-white color. This paint is intended to be field coated. It is recommended that compatibility of field applied finish paint with factory applied primer paint be established prior to application of finish paint system.

Capture the industrial-retro feeling with an exposed metallic G-90 finish on Dovetail deck.

G90 Galvanized

ASTM A653 SS Grade 50 (min.) steel with G90 galvanized coating.

Protect the Dovetail deck in natatoriums and other demanding (harsh, humid, corrosive) environments.

Tnemec or Sherwin-Williams field applied coatings with Enhanced 2-coat polyester paint

The High Performance Paint solution utilizes the factory applied Enhanced 2-Coat polyester paint in combination with field applied Tnemec or Sherwin-Williams finishes designed specifically for demanding (harsh, humid, corrosive) environments. Contact us for suggested field finish specifications.



**NOTICE:** Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# DOVETAIL DECK COATING SYSTEM



## DOVETAIL DECK COATING SOLUTIONS BY SHERWIN-WILLIAMS

Created to withstand most anything that comes its way, our specially formulated polyester coating is designed to go where it will be abused—maintaining extreme resistance to abrasion, chipping and marring with tremendous color and gloss retention.

### VULCRAFT/VERCO GROUP

They continue to build their reputation as the leading producer of steel deck, providing architectural deck as a part of your structural steel package.

### COATING APPLICATIONS

- Gymnasiums
- Auditoriums
- Schools
- Commercial and residential interior use

### SUBSTRATES

A653 and A1063 Hot-Dipped Galvanized (HDG) Steel with G90 coating.

### COLORS

Dovetail steel deck is available in a standard white, color code PMW7512. Custom colors are available but a minimum order size will apply. Contact your Verco sales office for information and lead times.

### TOUCHUP COATING

Field applied color-matched aerosol touchup to repair scratches and nicks of factory applied coatings available through your local Sherwin-Williams supplier.


**SHERWIN-WILLIAMS**  
Coil Coatings

coil.sherwin.com or call (888) 306-2645

**NUCOR**  
VULCRAFT

## COMMITMENT TO QUALITY

Dovetail Deck coatings are proven through rigorous performance testing.

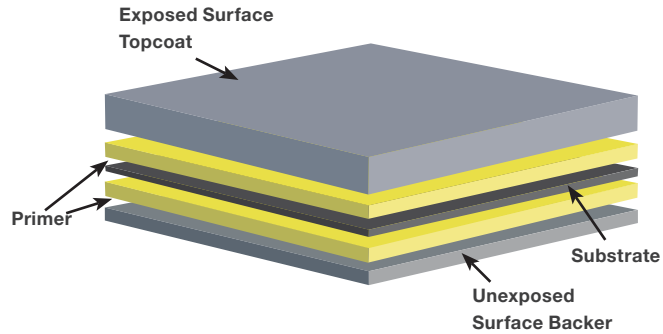

### POLYESTER COIL COATING SYSTEM

Number of Coats	Dry Film Thickness (DFT)		Total Exposed DFT:	Unexposed Backer
	Primer	Exposed Surface Topcoat		
2-Coat	0.2–0.3 mils	0.7–0.8 mils	0.9–1.1 mils	0.3–0.4 mils

### PERFORMANCE TESTING

Application Method	Factory applied continuous coil coating process
Substrate	Hot-Dipped Galvanized (HDG) steel

PHYSICAL TESTING	ASTM <sup>1</sup> TEST METHOD	TEST RESULT
Film Adhesion	ASTM D3359	No removal of film under tape in the cross-hatched area. (Dry, Wet, Boiling Water)
Surface Burning Characteristics	ASTM E84-18A	Flame Spread Index: 0
Humidity Resistance	ASTM D 2247: 100% RH at 100° F for 2,000 hours	No field blisters
Impact Resistance (direct)	ASTM D2794	3X metal thickness inch-pound, no loss of adhesion
Pencil Hardness	ASTM D3363	F minimum.
Salt Spray	ASTM B117: 1,000 Hours	Creep from scribe = 1.5mm and edge = 4.5mm, no surface blistering #10 rating
Specular Gloss 60°	ASTM D523	15-50
T-Bends	ASTM D4145 <sup>2</sup>	2T, no loss of adhesion.

<sup>1</sup>American Society for Testing and Materials. <sup>2</sup>Coatings are not designed to bridge cracks in the substrate. The coatings provided with Verco/Vulcraft deck will generally meet the requirements for most post-painted fabrication processes. However, variations in metal quality, thickness or cleaning/pretreatment applications can lead to diminished flexibility in the coating.

For details and health, safety and handling information, Material Safety Data Sheets (MSDS) are available at [coil.sherwin.com](http://coil.sherwin.com).

Nucor Corporation and its affiliates (collectively, "Nucor") expressly disclaim (i) any and all representations, warranties and conditions, express or implied, related to the information presented herein, including but not limited to warranties of merchantability, fitness for a particular purpose, and non-infringement; and (ii) any and all liability whatsoever arising out of or related to the information provided herein or its use.

Sherwin-Williams makes no warranties, expressed or implied, and disclaims all implied warranties including warranties of merchantability or fitness for a particular use. Sherwin-Williams will not be liable for any special, incidental or consequential damages.


SHERWIN-WILLIAMS is a registered trademark of SWIMC, LLC. NUCOR, VULCRAFT and VERCO are registered trademarks of Nucor.

# NEXT GENERATION 2" ACOUSTICAL DOVETAIL ROOF DECK ACOUSTICAL SOLUTIONS

## REDUCE INTERIOR NOISE WITH THE SOUND ABSORPTION CAPABILITIES OF 2.0DS-30 AC OR 2.0DF-30 AC ACOUSTICAL ROOF DECK

### 2.0" DEEP DOVETAIL ACOUSTICAL DECK

- FM Approved<sup>1</sup>
- IAPMO UES ER-423

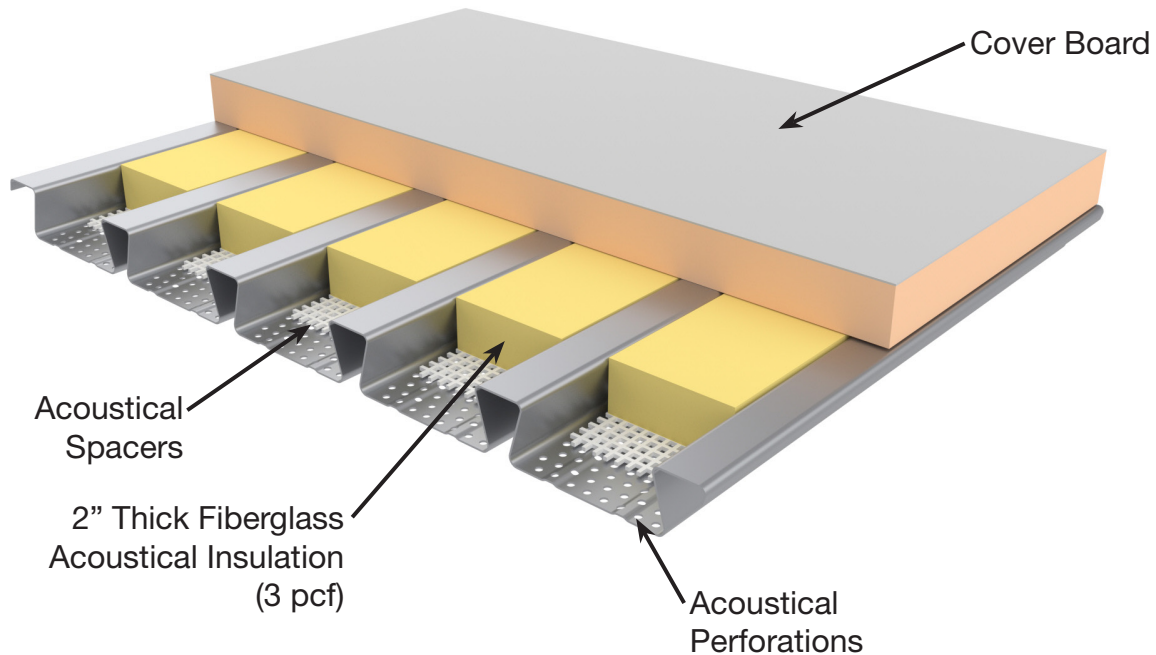

### Noise Reduction Coefficients

Cover Board	Deck Insulation	Absorption Coefficients						SSA	NRC	RAL Test No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
2" Poly-Iso	Plain	0.22	0.52	1.14	1.04	0.83	0.76	0.88	0.90	<a href="#">A25-163</a>
	Encapsulated	0.34	0.59	0.96	0.75	0.79	0.68	0.78	0.75	<a href="#">A25-164</a>
2" Fiberglass	Plain	0.77	1.21	1.21	1.01	0.85	0.62	1.06	1.05	<a href="#">A25-184</a>
	Encapsulated	0.63	0.86	0.95	0.75	0.74	0.63	0.84	0.85	<a href="#">A25-183</a>
½" Roof Board	Plain	0.24	0.47	1.11	1.04	0.81	0.64	0.85	0.85	<a href="#">A25-190</a>
	Encapsulated	0.26	0.60	1.17	0.92	0.62	0.38	0.81	0.85	<a href="#">A25-188</a>

#### Notes:

1. See Factory Mutual Approval Report for complete assembly details.
2. The acoustical test reports with complete assembly details are available from [www.vulcraft.com](http://www.vulcraft.com).


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# NEXT GENERATION 3.5" ACOUSTICAL DOVETAIL ROOF DECK ACOUSTICAL SOLUTIONS

## REDUCE INTERIOR NOISE WITH THE SOUND ABSORPTION CAPABILITIES OF 3.5DS-30 AC OR 3.5DF-30 AC ACOUSTICAL ROOF DECK

### 3.5" DEEP DOVETAIL ACOUSTICAL DECK

- FM Approved<sup>1</sup>
- IAPMO UES ER-423

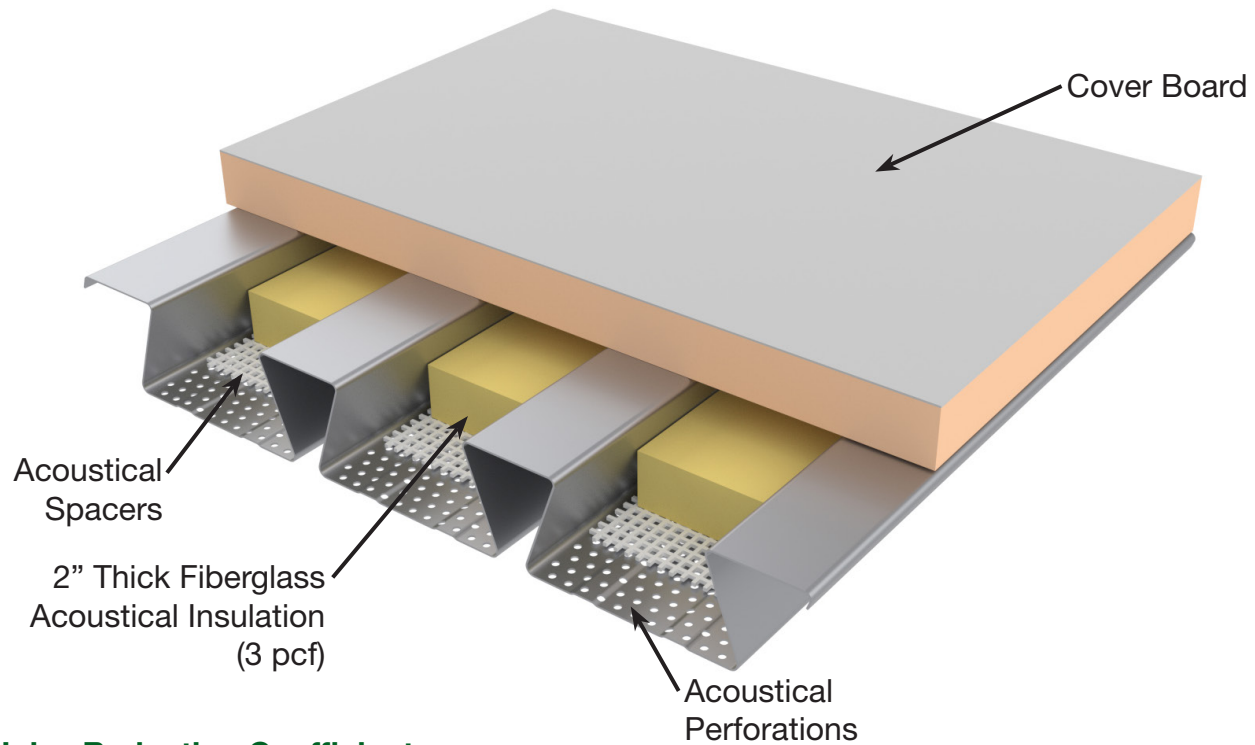

### Noise Reduction Coefficients

Cover Board	Deck Insulation	Absorption Coefficients						SSA	NRC	RAL Test No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
2" Poly-Iso	Plain	0.33	0.72	1.08	0.97	0.92	0.76	0.93	0.90	<a href="#">A25-214</a>
	Encapsulated	0.40	0.80	1.04	0.86	0.74	0.55	0.87	0.85	<a href="#">A25-211</a>
2" Fiberglass	Plain	0.77	1.11	1.08	0.96	0.90	0.73	1.04	1.00	<a href="#">A25-215</a>
	Encapsulated	0.78	1.02	0.99	0.90	0.75	0.64	0.93	0.90	<a href="#">A25-210</a>
½" Roof Board	Plain	0.26	0.69	1.07	0.97	0.92	0.75	0.92	0.90	<a href="#">A25-213</a>
	Encapsulated	0.42	0.79	1.00	0.84	0.73	0.57	0.85	0.85	<a href="#">A25-212</a>

### Notes:


1. See Factory Mutual Approval Report for complete assembly details.
2. The acoustical test reports with complete assembly details are available from [www.vulcraft.com](http://www.vulcraft.com).

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# VULCRAFT NRC ACOUSTICAL SOLUTIONS

## DOVETAIL ACOUSTICAL DECKS

**REDUCE INTERIOR NOISE WITH THE SOUND ABSORPTION CAPABILITIES OF VULCRAFT ACOUSTICAL ROOF DECK**

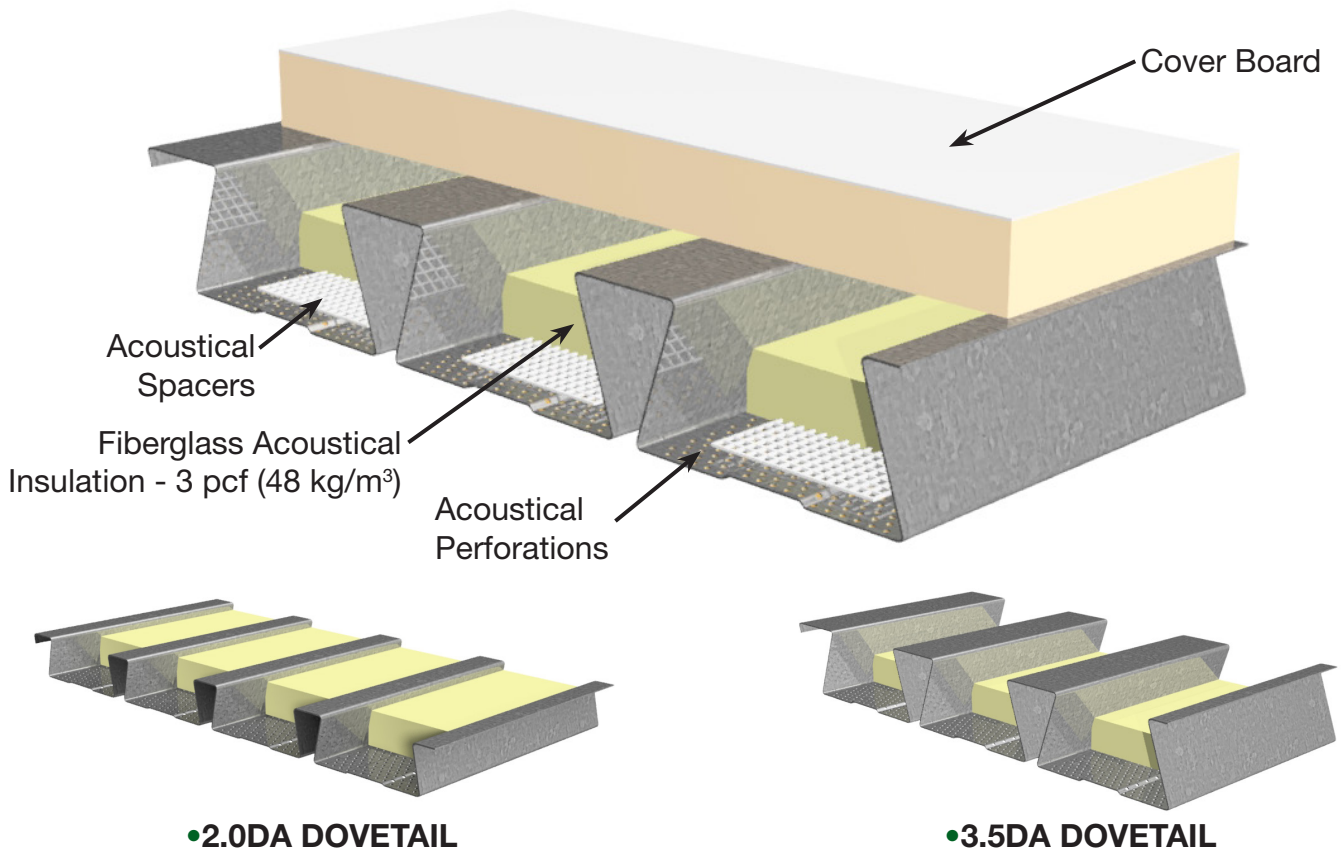


Roof Insulation	AC Insulation	Absorption Coefficients						SSA	NRC	Test. No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
<b>2.0DA DOVETAIL</b>										
Poly-Iso	Plain	0.19	0.54	1.15	1.07	1.01	0.79	0.95	0.95	A14-170
	Encapsulated	0.35	0.82	1.15	0.99	0.97	0.72	0.96	1.00	A14-167
Fiberglass	Plain	0.74	1.40	1.25	1.03	0.98	0.80	1.14	1.15	A14-169
	Encapsulated	0.62	1.18	1.08	0.93	0.97	0.77	1.02	1.05	A14-168
½" Roof Board	Plain	0.17	0.51	1.05	1.05	0.85	0.77	0.85	0.85	A19-101
	Encapsulated	0.30	0.56	1.02	0.99	0.92	0.78	0.86	0.85	A19-102
<b>3.5DA DOVETAIL</b>										
Poly-Iso	Plain	0.25	0.74	1.13	1.06	0.97	0.75	0.96	1.00	A14-186
	Encapsulated	0.38	0.86	1.18	1.03	0.93	0.65	0.98	1.00	A14-189
Fiberglass	Plain	0.92	1.51	1.13	1.06	0.98	0.78	1.14	1.15	A14-187
	Encapsulated	0.97	1.50	1.09	1.00	0.91	0.67	1.10	1.15	A14-188
½" Roof Board	Plain	0.21	0.71	1.06	0.91	0.88	0.68	0.88	0.90	AB21-132
	Encapsulated	0.15	0.82	1.07	0.98	0.89	0.68	0.93	0.95	AB21-130

**Note:**

1. Plain 3.0 pcf (48 kg/m<sup>3</sup>) fiberglass acoustical insulation standard. Inquire regarding lead time for encapsulated insulation.

# VULCRAFT NRC ACOUSTICAL SOLUTIONS

## FLUTED ACOUSTICAL DECKS

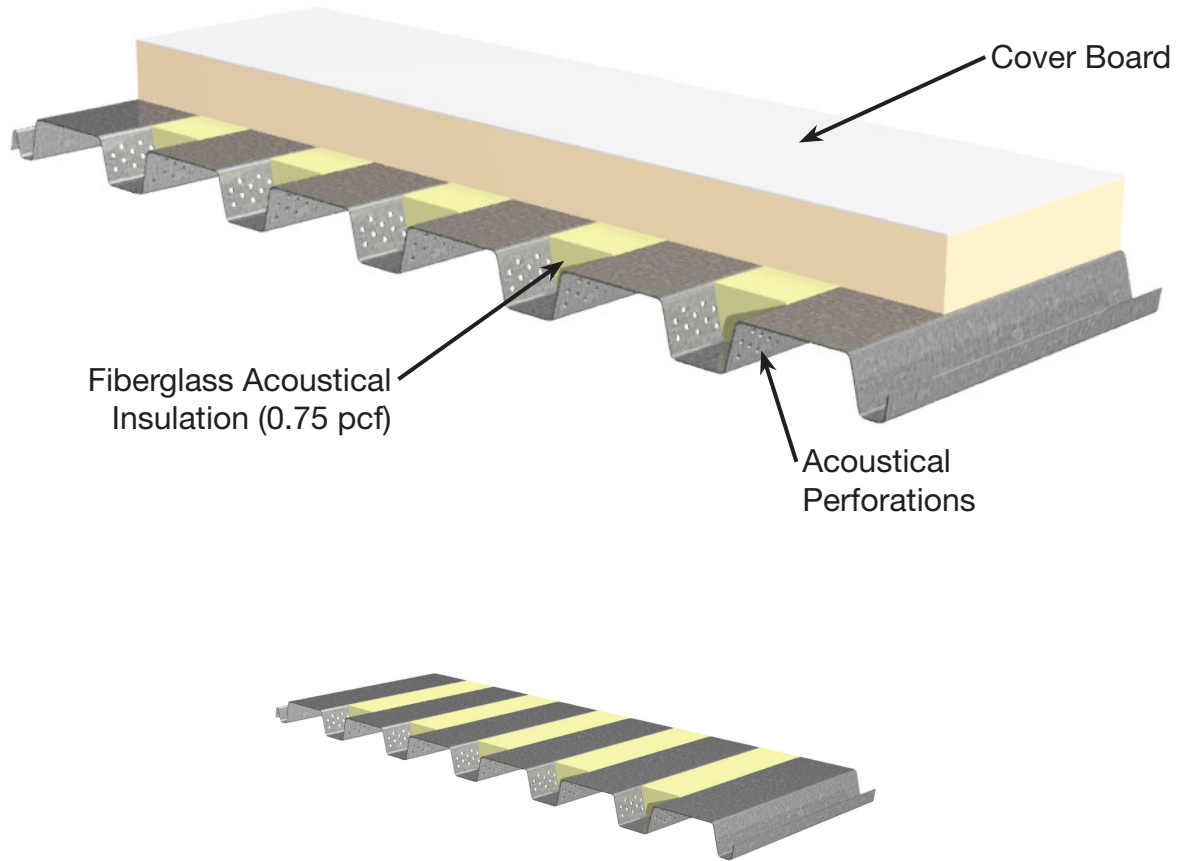

### •1.5BA-36 / 1.5BIA-36 / 1.5PLBA-36


Roof Insulation	AC Insulation	Absorption Coefficients							SSA	NRC	Test. No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz				
<b>1.5BA-36 / 1.5BIA-36 / 1.5PLBA-36</b>											
Poly-Iso	Plain	0.09	0.20	0.47	0.86	0.55	0.32	0.55	0.55	<a href="#">A15-125</a>	
	Encapsulated	0.14	0.35	0.74	0.76	0.44	0.27	0.57	0.55	<a href="#">A15-124</a>	
Fiberglass	Plain	0.68	1.16	1.17	0.96	0.52	0.31	0.95	0.95	<a href="#">A15-126</a>	
	Encapsulated	0.75	0.83	0.78	0.68	0.42	0.28	0.67	0.70	<a href="#">A15-123</a>	

**Note:**

1. Plain 0.75 pcf (12 kg/m<sup>3</sup>) fiberglass acoustical insulation standard for all BA decks. Inquire regarding lead time for encapsulated insulation.


# VULCRAFT NRC ACOUSTICAL SOLUTIONS

## FLUTED ACOUSTICAL DECKS

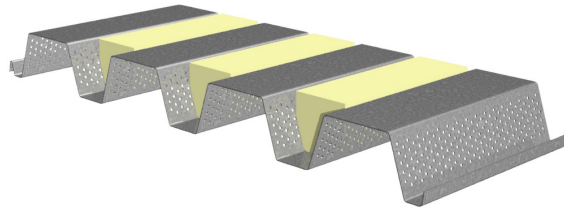

### •3NLA-32 / 3NIA-32 / 3PLNA-32

Roof Insulation	AC Insulation	Absorption Coefficients						SSA	NRC	Test. No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
<b>3NLA-32 / 3NIA-32 / 3PLNA-32</b>										
2" Poly-Iso	Plain	0.23	0.42	0.85	0.95	0.50	0.41	0.68	0.70	<a href="#">A19-032</a>
	Encapsulated	0.30	0.62	1.09	0.79	0.52	0.31	0.74	0.75	<a href="#">A19-111</a>
2" Fiberglass	Plain	0.78	1.17	1.20	0.98	0.50	0.41	0.96	0.95	<a href="#">A19-031</a>
	Encapsulated	0.89	1.08	1.09	0.74	0.46	0.30	0.83	0.85	<a href="#">A19-110</a>
½" Roof Board	Plain	0.21	0.41	0.81	0.89	0.49	0.41	0.64	0.65	<a href="#">A19-033</a>

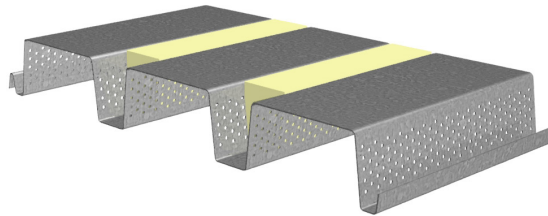

### •3NA-24 / 3NIA-24


Roof Insulation	AC Insulation	Absorption Coefficients						SSA	NRC	Test. No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
<b>3NA-24 / 3NIA-24</b>										
Poly-Iso	Plain	0.19	0.33	0.73	0.83	0.48	0.33	0.59	0.60	<a href="#">A15-130</a>
	Encapsulated	0.17	0.39	0.94	0.86	0.48	0.27	0.67	0.65	<a href="#">A15-138</a>
Fiberglass	Plain	0.81	1.16	1.15	0.91	0.47	0.27	0.92	0.90	<a href="#">A15-128</a>
	Encapsulated	1.07	1.13	1.04	0.81	0.43	0.26	0.85	0.85	<a href="#">A15-137</a>

**Note:**


1. Plain 0.75 pcf (12 kg/m<sup>3</sup>) fiberglass acoustical insulation standard for all NA decks. Inquire regarding lead time for encapsulated insulation.

# VULCRAFT NRC ACOUSTICAL SOLUTIONS


## CELLULAR ACOUSTICAL DECKS



- 1.5BPA-36 / 1.5PLBPA-36 ROOF DECK
- 1.5VLPA-36 / 1.5PLVLPA-36 COMPOSITE DECK




- 3NPA-32 / 3PLNPA-32 ROOF DECK




- 3NPA-24 / 3PLNPA-24 ROOF DECK

Roof Insulation	AC Insulation	Absorption Coefficients							SSA	NRC	Test. No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz				
<b>1.5BPA-36 / 1.5PLBPA-36 ROOF DECK OR 1.5VLPA-36 / 1.5PLVLPA-36 COMPOSITE DECK</b>											
Poly-Iso	Plain	0.27	0.32	0.70	1.02	0.80	0.52	0.69	0.70	<a href="#">A15-114</a>	
	Encapsulated	0.26	0.44	0.84	0.98	0.67	0.45	0.72	0.75	<a href="#">A15-115</a>	
<b>3NPA-32 / 3PLNPA-32 ROOF DECK</b>											
Poly-Iso	Plain	0.47	0.61	1.08	1.03	0.83	0.67	0.90	0.90	<a href="#">A22-125</a>	
	Encapsulated	0.52	0.71	1.12	0.80	0.62	0.45	0.83	0.80	<a href="#">A22-188</a>	
<b>3NPA-24 / 3PLNPA-24 ROOF DECK</b>											
Poly-Iso	Plain	0.39	0.56	1.05	0.91	0.67	0.61	0.81	0.80	<a href="#">A19-386</a>	
	Encapsulated	0.39	0.62	1.19	0.74	0.66	0.44	0.80	0.80	<a href="#">A15-231</a>	



- 2VLPA-36 / 2PLVLPA-36 COMPOSITE DECK



- 3VLPA-36 / 3PLVLPA-36 COMPOSITE DECK

Floor	AC Insulation	Absorption Coefficients						SSA	NRC	Test. No.
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz			
<b>2VLPA-36 / 2PLVLPA-36 COMPOSITE DECK</b>										
Concrete	Plain	0.31	0.44	0.72	0.77	0.47	0.47	0.60	0.60	<a href="#">A15-120</a>
	Encapsulated	0.39	0.45	0.87	0.66	0.31	0.19	0.58	0.55	<a href="#">A15-119</a>
<b>3VLPA-36 / 3PLVLPA-36 COMPOSITE DECK</b>										
Concrete	Plain	0.48	0.56	1.00	0.75	0.49	0.49	0.69	0.70	<a href="#">A15-121</a>
	Encapsulated	0.51	0.63	0.83	0.49	0.39	0.28	0.58	0.60	<a href="#">A15-122</a>

**Note:**

1. Factory installed plain 3.0 pcf (48 kg/m<sup>3</sup>) fiberglass acoustical insulation standard for all cellular decks. Inquire regarding lead time for encapsulated insulation.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2.0D DOVETAIL DECK-SLAB ACOUSTICAL SOLUTIONS

**ACHIEVE QUIET SPACES WITH PREMIUM FINISHES BY USING THE SUPERIOR STC AND IIC RATINGS OF 2.0D DECK-SLABS**

## 2.0D DECK-SLAB

- 2" (51 mm) Deep Composite Deck
- 5½" (140 mm) Total Slab Depth
- Normal Weight Concrete (145 pcf / 2325 kg/m<sup>3</sup>)
- Exposed Deck Ceiling

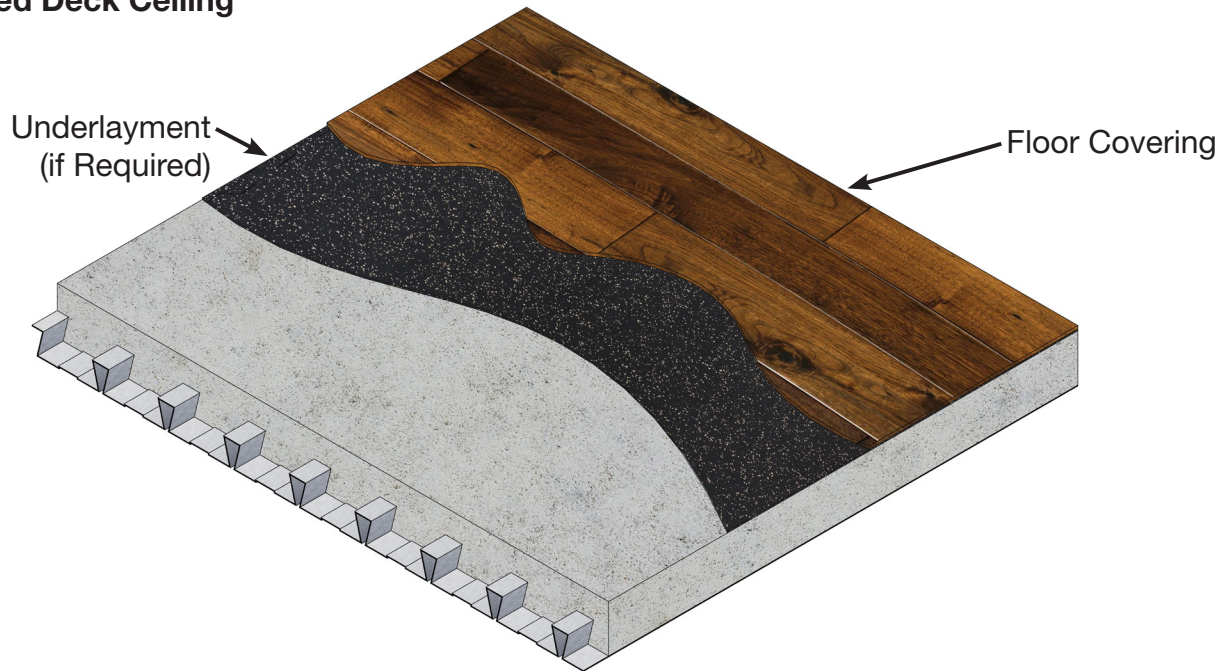


### Exposed Deck (No Ceiling)

Floor Covering	Underlayment	STC	IIC	Intertek Test No.
Ceramic Tile	5 mm ECOsilence	<b>51</b>	<b>41</b>	<a href="#">H7786.06</a>
Engineered Wood	5 mm ECOsilence	<b>50</b>	<b>50</b>	<a href="#">H7786.05</a>
Fusion Hybrid Vinyl Plank	2 mm ECOsilence	<b>46</b>	<b>51</b>	<a href="#">H7786.02</a>
Attain Luxury Vinyl Tile	5 mm ECOsilence	<b>52</b>	<b>51</b>	<a href="#">H7786.03</a>
Forest Rx Rubber Backed Sheet Vinyl	None	<b>51</b>	<b>51</b>	<a href="#">H7786.04</a>
Exposed Concrete	None	<b>52</b>	<b>23</b>	<a href="#">H7786.01</a>

# 2.0D DOVETAIL DECK-SLAB ACOUSTICAL SOLUTIONS

## 2.0D DECK-SLAB

- 2" (51 mm) Deep Composite Deck
- 5½" (140 mm) Total Slab Depth
- Normal Weight Concrete (145 pcf / 2325 kg/m<sup>3</sup>)
- Gypsum Board Ceiling

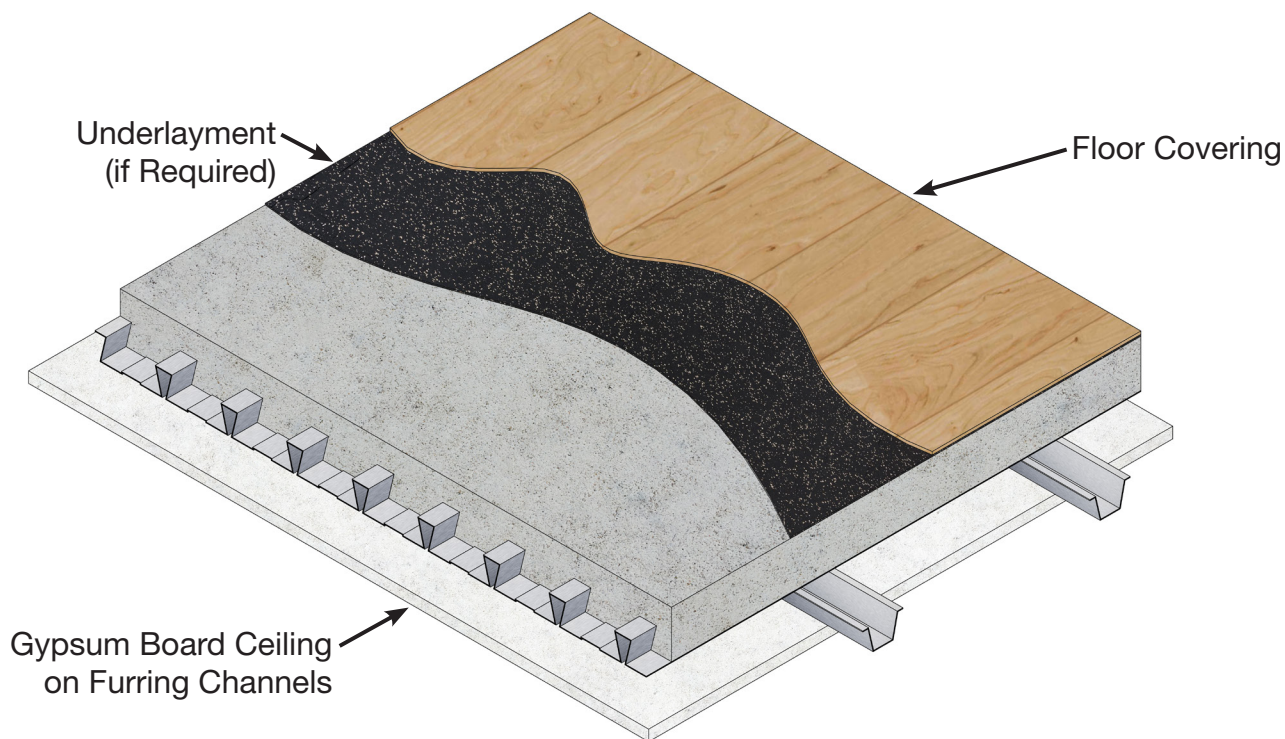

### Gypsum Board Ceiling on Furring Channels Directly Attached to Deck

Floor Covering	Underlayment	STC	IIC	Intertek Test No.
Ceramic Tile	5 mm ECOsilence	<b>53</b>	<b>47</b>	<a href="#">H7786.12</a>
Engineered Wood	5 mm ECOsilence	<b>50</b>	<b>50</b>	<a href="#">H7786.11</a>
Fusion Hybrid Vinyl Plank	2 mm ECOsilence	<b>51</b>	<b>50</b>	<a href="#">H7786.08</a>
Attain Luxury Vinyl Tile	2 mm ECOsilence	<b>52</b>	<b>50</b>	<a href="#">H7786.09</a>
Forest Rx Rubber Backed Sheet Vinyl	None	<b>50</b>	<b>50</b>	<a href="#">H7786.10</a>
Exposed Concrete	None	<b>52</b>	<b>32</b>	<a href="#">H7786.07</a>


#### Note:

1. Values shown are for gypsum board on furring channels directly connected to the underside of the slab. Gypsum board ceilings attached to the deck by methods providing acoustical separation will provide improved STC and IIC values.

# 2.0D DOVETAIL DECK-SLAB ACOUSTICAL SOLUTIONS

## 2.0D DECK-SLAB

- 2" (51 mm) Deep Composite Deck
- 5½" (140 mm) Total Slab Depth
- Normal Weight Concrete (145 pcf / 2325 kg/m<sup>3</sup>)
- Suspended Gypsum Board Ceiling

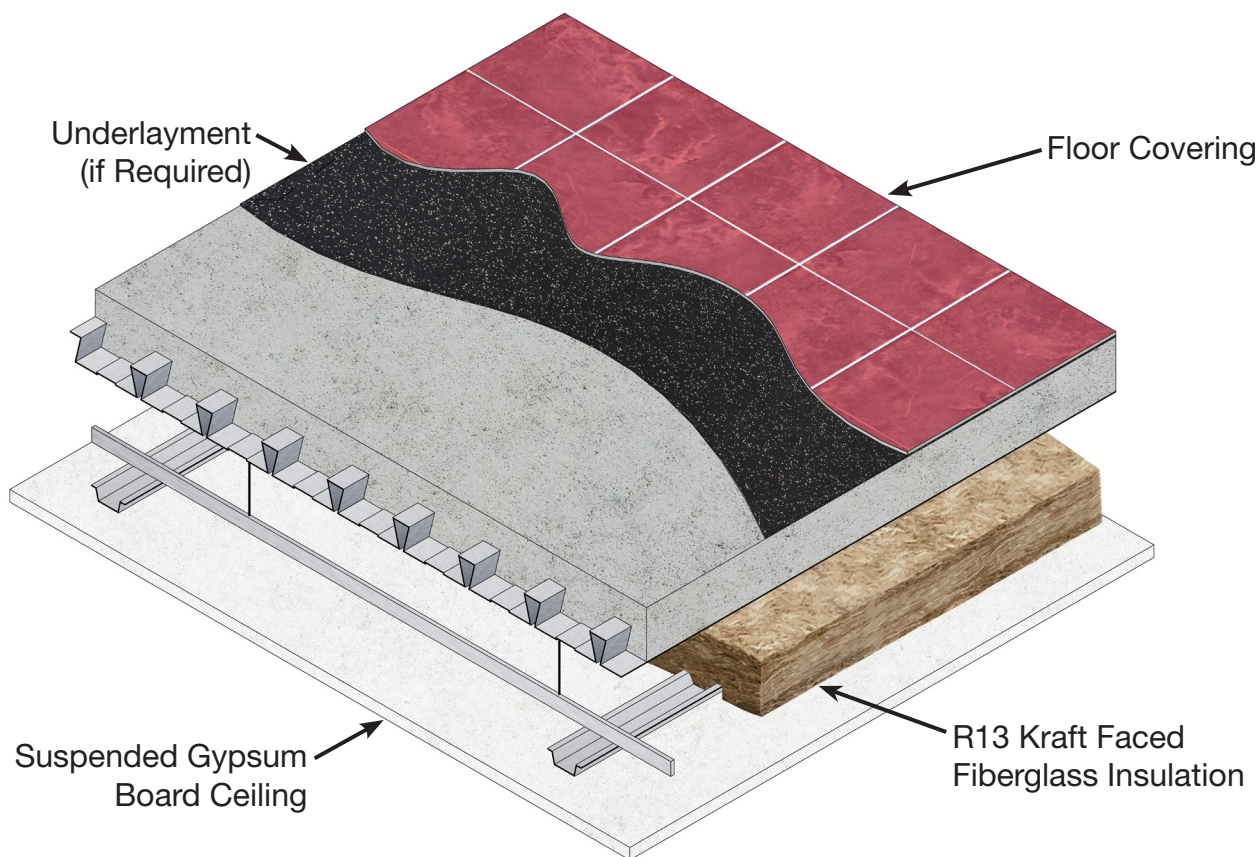

### Suspended Gypsum Board Ceiling

Floor Covering	Underlayment	STC	IIC	Intertek Test No.
Ceramic Tile	5 mm ECOsilence	62	60	<a href="#">I5133.01</a>

#### Note:

1. Laboratory tests determining STC and IIC for Dovetail FormLok deck with a suspended ceiling were conducted with ceramic tile and underlayment. Adding a suspended ceiling to the ceramic tile assembly improved the STC rating by 11 and the IIC rating by 19 compared to an assembly with no ceiling. Other flooring types can expect similar improvement in performance.

## 2.0D DOVETAIL DECK-SLAB

### Notes:

1. The acoustical test reports with complete assembly details are available from [www.dovetaildeck.com](http://www.dovetaildeck.com).
2. The testing was performed in accordance with the following standards:
  - **ASTM E90-09 (2016)**, *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions*
  - **ASTM E492-09(2016)e1**, *Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine*


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3.5D DOVETAIL DECK-SLAB ACOUSTICAL SOLUTIONS

**ACHIEVE QUIET SPACES WITH PREMIUM FINISHES BY USING THE SUPERIOR STC AND IIC RATINGS OF 3.5D DECK-SLABS**

## 3.5D DECK-SLAB

- 3½” (89 mm) Deep Composite Deck
- 6” (152 mm) Total Slab Depth
- Normal Weight Concrete (145 pcf / 2325 kg/m<sup>3</sup>)
- Exposed Deck Ceiling

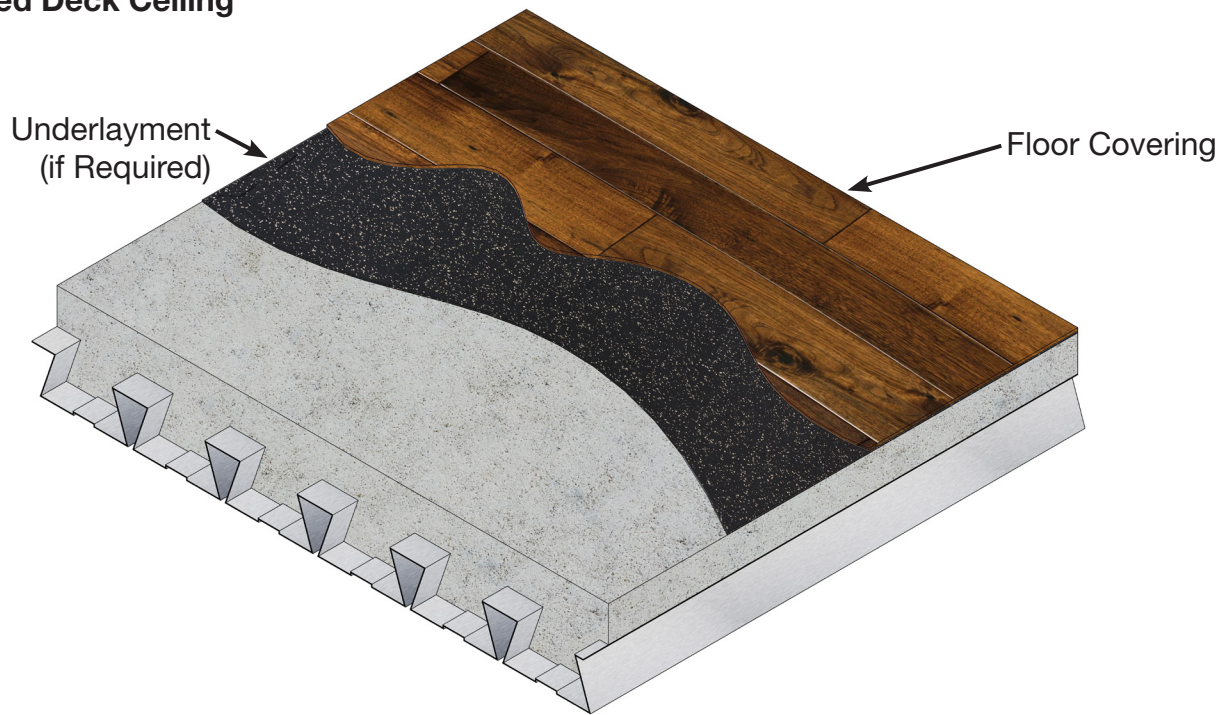


### Exposed Deck (No Ceiling)

Floor Covering	Underlayment	STC	IIC	Intertek Test No.
Ceramic Tile	5 mm ECOsilence	<b>50</b>	<b>42</b>	<a href="#">H7787.06</a>
Engineered Wood	5 mm ECOsilence	<b>45</b>	<b>46</b>	<a href="#">H7787.05</a>
Fusion Hybrid Vinyl Plank	2 mm ECOsilence	<b>47</b>	<b>47</b>	<a href="#">H7787.02</a>
Attain Luxury Vinyl Tile	5 mm ECOsilence	<b>50</b>	<b>50</b>	<a href="#">H7787.03</a>
Forest Rx Rubber Backed Sheet Vinyl	None	<b>49</b>	<b>49</b>	<a href="#">H7787.04</a>
Exposed Concrete	None	<b>50</b>	<b>24</b>	<a href="#">H7787.01</a>

# 3.5D DOVETAIL DECK-SLAB ACOUSTICAL SOLUTIONS

## 3.5D DECK-SLAB

- 3½” (89 mm) Deep Composite Deck
- 6” (152 mm) Total Slab Depth
- Normal Weight Concrete (145 pcf / 2325 kg/m<sup>3</sup>)
- Gypsum Board Ceiling

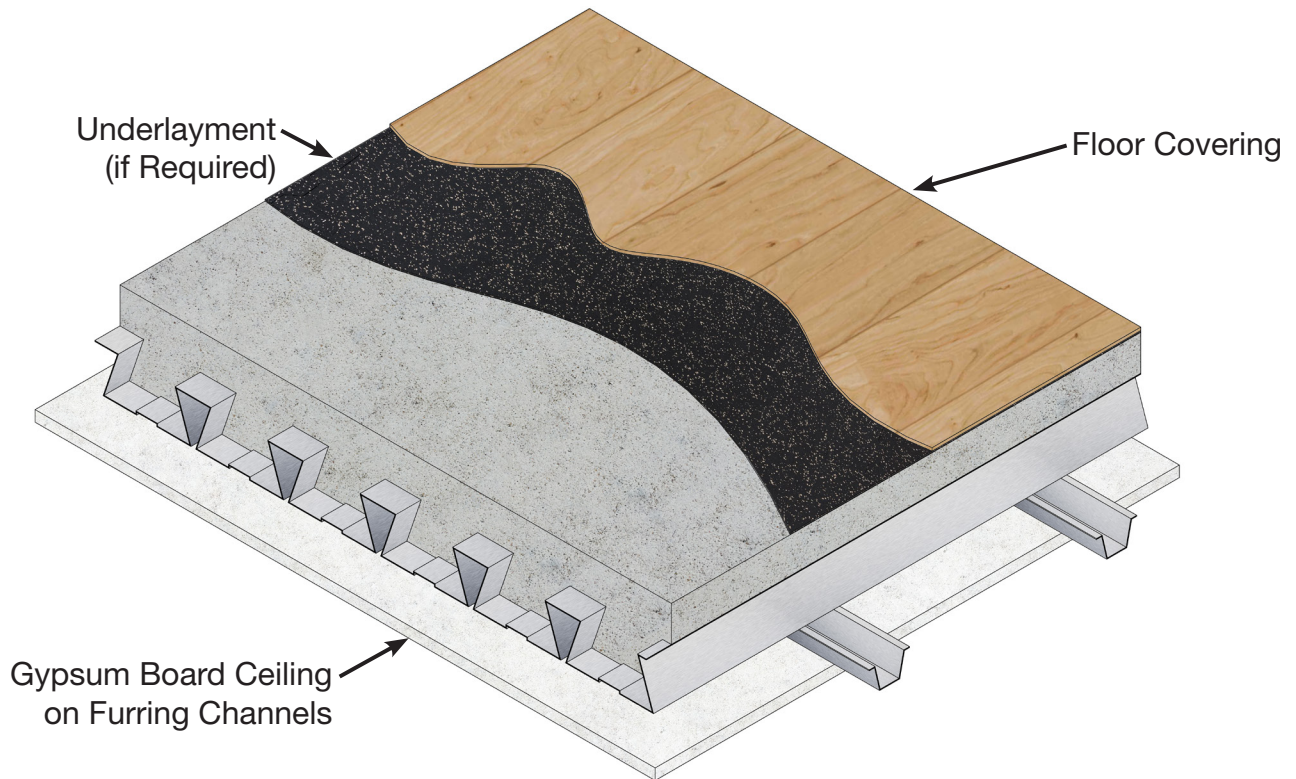

### Gypsum Board Ceiling on Furring Channels Directly Attached to Deck

Floor Covering	Underlayment	STC	IIC	Intertek Test No.
Ceramic Tile	5 mm ECOsilence	<b>56</b>	<b>49</b>	<a href="#">H7787.12</a>
Engineered Wood	5 mm ECOsilence	<b>55</b>	<b>52</b>	<a href="#">H7787.11</a>
Fusion Hybrid Vinyl Plank	2 mm ECOsilence	<b>55</b>	<b>53</b>	<a href="#">H7787.08</a>
Attain Luxury Vinyl Tile	5 mm ECOsilence	<b>56</b>	<b>52</b>	<a href="#">H7787.09</a>
Forest Rx Rubber Backed Sheet Vinyl	None	<b>55</b>	<b>52</b>	<a href="#">H7787.10</a>
Exposed Concrete	None	<b>55</b>	<b>32</b>	<a href="#">H7787.07</a>


#### Note:

1. Values shown are for gypsum board on furring channels directly connected to the underside of the slab. Gypsum board ceilings attached to the deck by methods providing acoustical separation will provide improved STC and IIC values.

# 3.5D DOVETAIL DECK-SLAB ACOUSTICAL SOLUTIONS

## 3.5D DECK-SLAB

- 3½" (89 mm) Deep Composite Deck
- 6" (152 mm) Total Slab Depth
- Normal Weight Concrete (145 pcf / 2325 kg/m<sup>3</sup>)
- Suspended Gypsum Board Ceiling

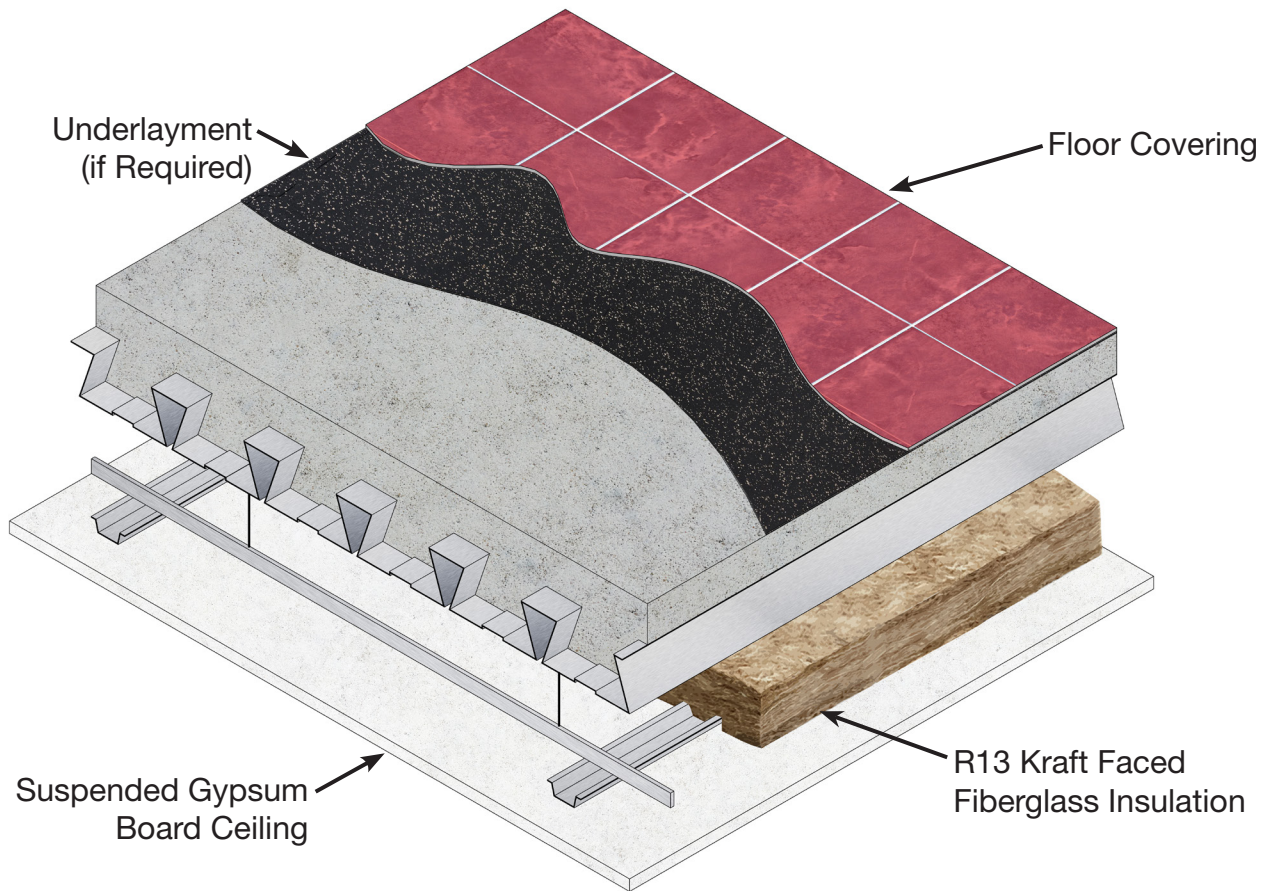

### Suspended Gypsum Board Ceiling

Floor Covering	Underlayment	STC	IIC	Intertek Test No.
Ceramic Tile	5 mm ECOsilence	62	62	<a href="#">I5133.02</a>

#### Note:

1. Laboratory tests determining STC and IIC for Dovetail FormLok deck with a suspended ceiling were conducted with ceramic tile and underlayment. Adding a suspended ceiling to the ceramic tile assembly improved the STC rating by 12 and the IIC rating by 20 compared to an assembly with no ceiling. Other flooring types can expect similar improvement in performance.

## 3.5D DOVETAIL DECK-SLAB


### Notes:

1. The acoustical test reports with complete assembly details are available from [www.dovetaildeck.com](http://www.dovetaildeck.com).
2. The testing was performed in accordance with the following standards:
  - **ASTM E90-09 (2016)**, *Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions*
  - **ASTM E492-09(2016)e1**, *Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine*

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

## USE UL RECOGNIZED VULCRAFT ROOF DECKS FOR YOUR FIRE RATED ASSEMBLIES

- Vulcraft steel decks may be used in assemblies which are required to meet hourly fire ratings. Approved hourly fire rated assemblies are a combination of specific proprietary materials as listed in UL fire resistance ratings.

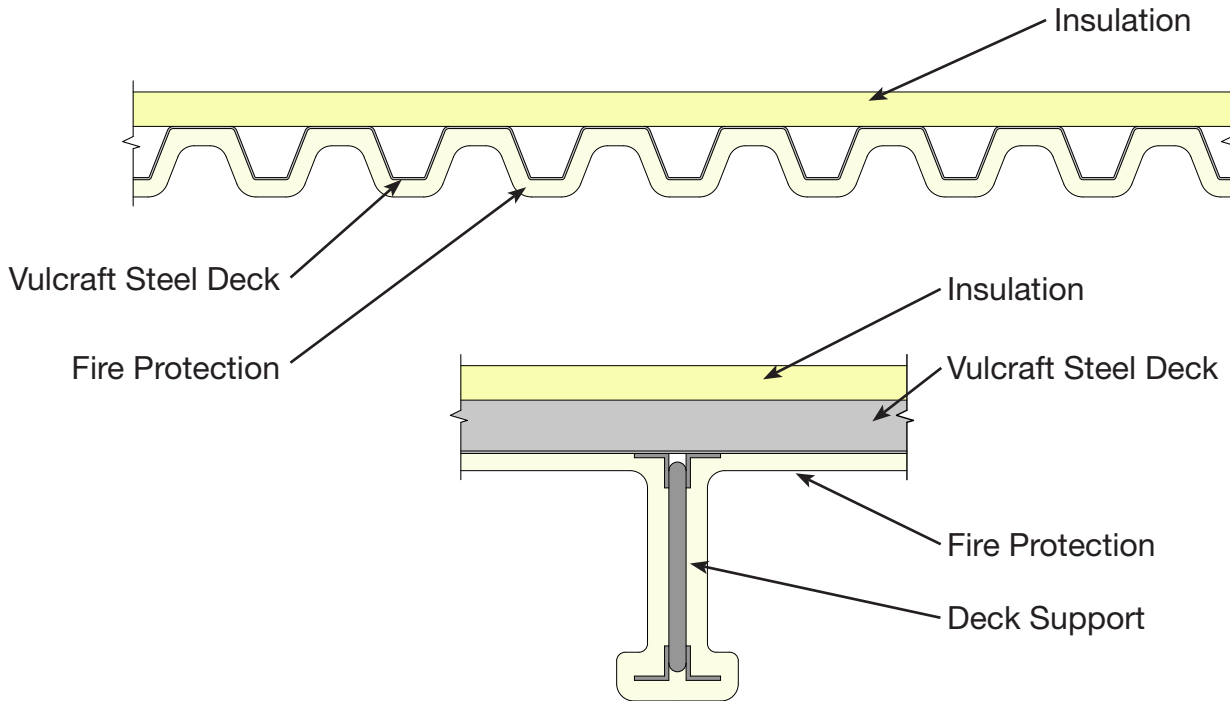

### REPRESENTATIVE FIRE RATED ASSEMBLY

Refer to the table on the following pages for a listing of UL fire-rated assemblies utilizing Vulcraft steel deck profiles. Refer to the particular UL assembly being considered for full details of construction, including specific information about fill or fireproofing thicknesses and span limitations.

## UL Fire Resistance Ratings

Restrained Assembly Ratings (hr.)	Type of Protection	Type of Insulation	UL Design No.	Deck Type					Unrestrained Beam Rating (hr.)	
				B	32" 3N	24" 3N	2.0D	3.5D		
<b>1</b>	Exposed Grid	Rigid Insulation	P211+	✓						
			P214+	✓					1	
			P225+	✓	✓	✓			1, 1½	
			P227+	✓						
			P230+	✓					1, 1½	
			P235+	✓					1	
			Insulating Fill	P214+	✓					1
	Gypsum Board	Rigid Insulation	P510+	✓	✓	✓				
			P514	✓						
	Cementitious	Rigid Insulation	P701*	✓	✓	✓			1, 1½, 2	
			P711*	✓	✓	✓			1, 1½, 2	
			P717*	✓	✓	✓			1, 1½, 2	
	Sprayed Fiber	Rigid Insulation	P801*	✓	✓	✓			1, 1½, 2, 3	
			P815*	✓	✓	✓			1, 1½, 2, 3	
			P819*	✓	✓	✓			1, 1½, 2	
	Unprotected Deck	Insulating Fill	P902	✓	✓	✓			1, 1½, 2	
			P907	✓	✓	✓			1, 1½, 2	
			P908	✓	✓	✓	✓	✓	1, 1½, 2	
			P919	✓	✓	✓			1, 1½	
			P920	✓	✓	✓			1, 1½, 2	
			P921	✓	✓	✓	✓	✓	1, 1½, 2	
			P922	✓	✓	✓			1, 1½, 2	
			P923	✓	✓	✓			1, 1½, 2	
			P937				✓	✓		
P938						✓	✓	1, 1½, 2		
<b>1½</b>	Exposed Grid	Rigid Insulation	P225+	✓	✓	✓			1, 1½	
			P227+	✓					1, 1½	
			P230+	✓					1, 1½	
	Metal Lath	Rigid Insulation	P404+	✓						
	Gypsum Board	Rigid Insulation	P510+	✓	✓	✓				
			P701*	✓	✓	✓			1, 1½, 2	
	Cementitious	Rigid Insulation	P711*	✓	✓	✓			1, 1½, 2	
			P717*	✓	✓	✓			1, 1½, 2	

## UL Fire Resistance Ratings (continued)

Restrained Assembly Ratings (hr.)	Type of Protection	Type of Insulation	UL Design No.	Deck Type					Unrestrained Beam Rating (hr.)
				B	32" 3N	24" 3N	2.0D	3.5D	
1½	Sprayed Fiber	Rigid Insulation	P801*	✓	✓	✓			1,1½,2
			P815*	✓	✓	✓			1,1½,2,3
			P819*	✓	✓	✓			1,1½,2,3
	Unprotected Deck	Insulating Fill	P902	✓	✓	✓			1,1½,2
			P907	✓	✓	✓			1,1½,2
			P908	✓	✓	✓	✓	✓	1,1½,2
			P919	✓	✓	✓			1,1½
			P920	✓	✓	✓			1,1½,2
			P921	✓	✓	✓	✓	✓	1,1½,2
			P922	✓	✓	✓			1,1½,2
			P923	✓	✓	✓			1,1½,2
			P937				✓	✓	
			P938				✓	✓	1,1½,2
2	Exposed Grid	Rigid Insulation	P237+	✓					2
	Metal Lath	Rigid Insulation	P404+	✓					
	Gypsum Board	Rigid Insulation	P514+	✓					
	Cementitious	Rigid Insulation	P701*	✓	✓	✓			1,1½,2
			P711*	✓	✓	✓			1,1½,2
			P717*	✓	✓	✓			1,1½,2
	Sprayed Fiber	Rigid Insulation	P801*	✓	✓	✓			1,1½,2
			P815*	✓	✓	✓			1,1½,2
			P819*	✓	✓	✓			1,1½,2,3
	Unprotected Deck	Insulating Fill	P902	✓	✓	✓			1,1½,2
			P907	✓	✓	✓			1,1½,2
			P908	✓	✓	✓	✓	✓	1,1½,2
			P920	✓	✓	✓			1,1½,2
P921			✓	✓	✓	✓	✓	1,1½,2	
P922			✓	✓	✓			1,1½,2	
P923			✓	✓	✓			1,1½,2	
P937						✓	✓		
P938				✓	✓	1,1½,2			

## Notes:


1. Refer to the UL “Fire Resistance Directory” for the necessary construction details.
2. Deck finish shall be galvanized unless noted otherwise.
  - + Deck finish is not critical for fire resistance when used in P2--, P4--, & P5-- Series designs. Deck finish shall be galvanized or painted.
  - \* Denotes deck finish is critical for fire resistance. Deck finish shall be galvanized or painted. This gray paint is a special type of paint and is compatible with the spray-applied fire protection and is U.L. approved for use in the denoted P7-- & P8-- Series designs.
3. B = 1.5B, 1.5BI, and 1.5PLB  
32” 3N = 32” Wide 3NL, 3NI, and 3PLN  
24” 3N = 24” Wide 3N and 3NI

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# VULCRAFT® COMPOSITE & NON-COMPOSITE DECK UL FIRE RATED ASSEMBLIES

## USE UL RECOGNIZED COMPOSITE AND NON-COMPOSITE DECKS FOR YOUR FIRE RATED ASSEMBLIES WITH STRUCTURAL CONCRETE FILL

• Vulcraft composite and non-composite slabs may be used to meet hourly fire ratings. The type and thickness of concrete specified will generally determine whether fireproofing will be required on the underside of the composite or non-composite deck.

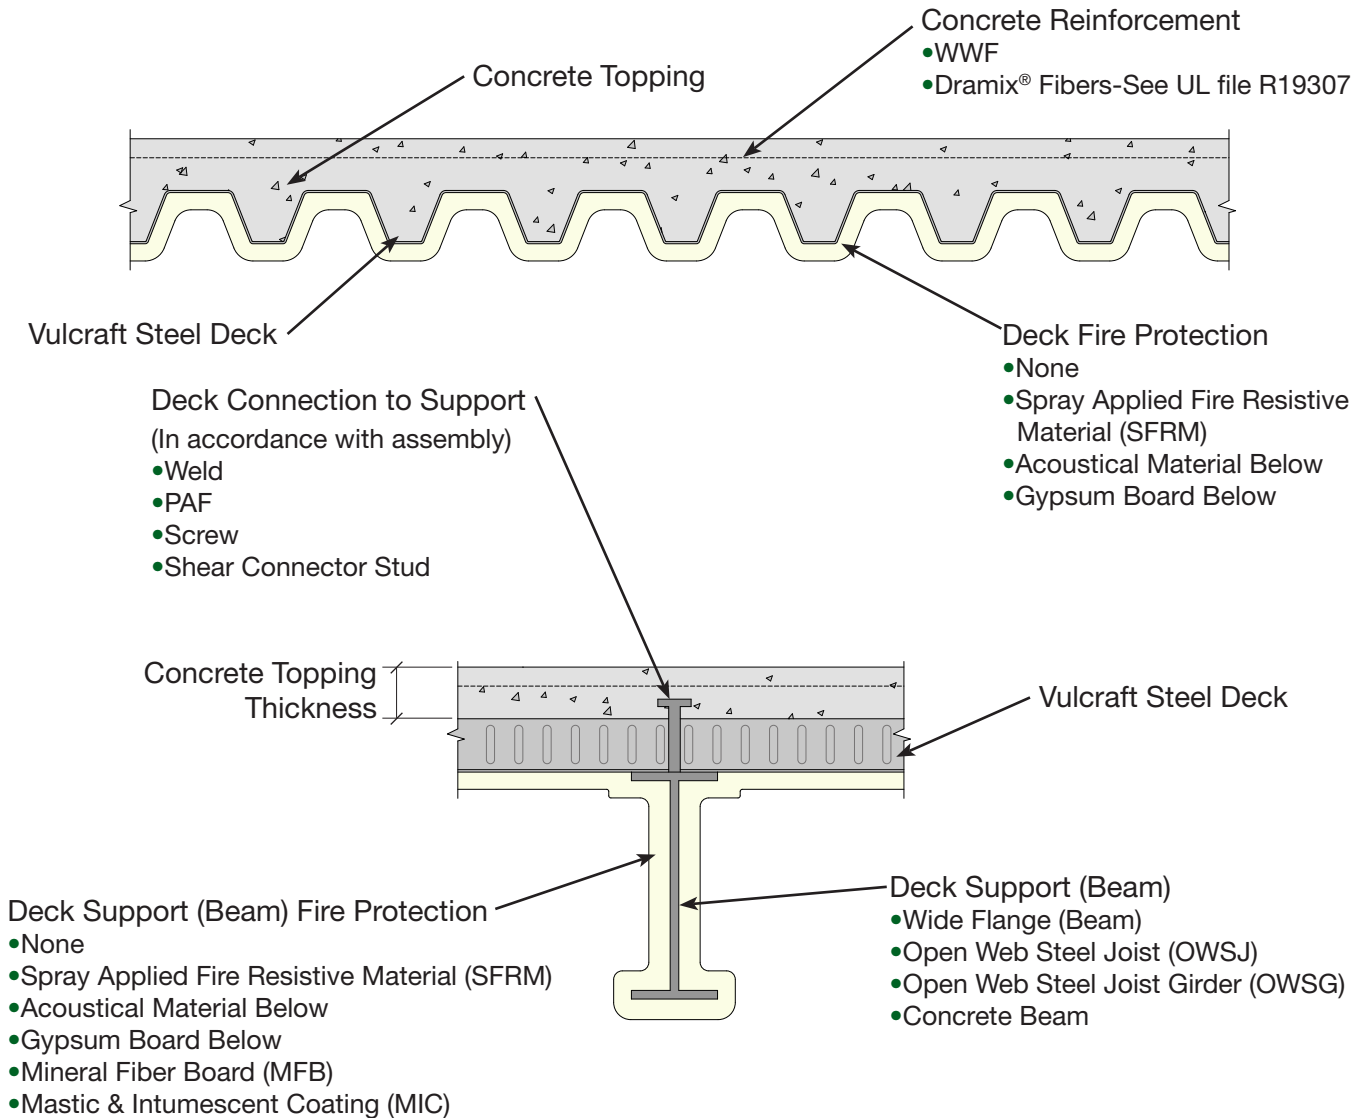

## REPRESENTATIVE FIRE RATED ASSEMBLY

The table on the following pages lists the UL fire rated assemblies that include Vulcraft composite and non-composite decks profiles. This summary table is provided to assist in identification of assemblies to meet specific project requirements. Refer to the particular UL assembly for full details of construction including, specific information about concrete slab, framing, type of fire protection, deck types and span limitations.

**Notes:**

1. Refer to the UL “Fire Resistance Directory” for the necessary construction details.
2. 1.5VL = 1.5VL, 1.5VLI, and 1.5PLVLI  
 2VL = 2VLI, 2VLJ, and 2PLVLI  
 3VL = 3VLI, 3VLJ, and 3PLVLI  
 1.5VLP = 1.5VLP and 1.5PLVLP  
 2VLP = 2VLP, and 2PLVLP  
 3VLP = 3VLP, and 3PLVLP  
 2.0D = 2.0DS FL, 2.0DF FL  
 3.5D = 3.5DS FL, 3.5DF FL
3. Concrete thickness is thickness of slab above deck, in.
4. 1.5VLR may be used in designs D832, D902, and D916.
5. All Dovetail FormLok composite deck assemblies are subject to an upper live load limit of 130 psf.
6. Fluted deck finish shall be galvanized unless noted otherwise.
  - + Denotes fluted deck finish is not critical when used in D2-- & D5-- Series designs. Deck finish shall be galvanized or phosphatized/painted.
  - \* Fluted deck finish is critical for fire resistance. Fluted deck finish shall be galvanized or phosphatized/painted. This gray paint is a special type of paint and is compatible with the spray-applied fire protection and is U.L. approved for use in the denoted D7-- & D8-- Series designs.
  - # Denotes fluted deck finish is not critical for fire resistance. Fluted deck finish shall be galvanized or phosphatized/painted.
7. Vulcraft cellular deck used in the listed assemblies shall be galvanized.
8. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.
9. Restrained Assembly Rating is 1½ hr with listed NW concrete thickness.

**Concrete Thickness**

(in.)	(mm)
2	51
2½	64
2¾	70
3¼	83
3½	89
4	102
4⅜	106
4½	114
4¾	121
5¼	133

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# VULCRAFT® COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>					
		Thickness (in.)	Type (pcf)	1.5VL	2VL	3VL	1.5VLP	2VLP	3VLP
<a href="#">D216</a>	1, 1½, 2, 3	2½-3½ <sup>8</sup>	147-153 NW 107-113 LW	✓	✓	✓		✓	✓
<a href="#">D219</a>	1, 1½, 2, 3	2½-3½ <sup>8</sup>	147-153 NW 107-113 LW	✓	✓	✓		✓	✓
<a href="#">D303</a>	1	3½	147-153 NW	✓	✓	✓	✓	✓	✓
	1½	4	147-153 NW	✓	✓	✓	✓	✓	✓
	2	4½	147-153 NW	✓	✓	✓	✓	✓	✓
	3	5¼	147-153 NW	✓	✓	✓	✓	✓	✓
	¾, 1	2½	107-113 LW	✓	✓	✓	✓	✓	✓
	1	2 <sup>5</sup> / <sub>8</sub>	107-120 LW	✓	✓	✓	✓	✓	✓
	1½	3	107-113 LW	✓	✓	✓	✓	✓	✓
	2	3¼	107-113 LW	✓	✓	✓	✓	✓	✓
	2	3¼	107-116 LW	✓	✓	✓	✓	✓	✓
	2	3½	114-120 LW	✓	✓	✓	✓	✓	✓
3	4 <sup>3</sup> / <sub>16</sub>	107-113 LW	✓	✓	✓	✓	✓	✓	
3	4 <sup>7</sup> / <sub>16</sub>	114-120 LW	✓	✓	✓	✓	✓	✓	
<a href="#">D502</a>	1½, 2	2½	147-153 NW	✓	✓	✓		✓	✓
<a href="#">D703</a>	1, 1½, 2, 3	2½	142-148 NW 105 LW	✓	✓	✓	✓	✓	✓
<a href="#">D708</a> <a href="#">D768</a>	3	2½	145-151 NW 109-115 LW	✓	✓	✓	✓	✓	✓
<a href="#">D712</a>	1, 1½, 2	2½	147-153 NW 110 LW		✓	✓			✓
<a href="#">D716</a>	2	2½	139 NW 109-115 LW	✓	✓	✓		✓	✓
<a href="#">D722</a>	1, 1½, 2	2½	142-148 NW 112 LW	✓	✓	✓		✓	✓
<a href="#">D730</a>	2	2½	147-153 NW		✓	✓		✓	✓
<a href="#">D739</a>	1, 1½, 2, 3, 4	2½	142-148 NW 102-120 LW 110 LW with OWSJ	✓	✓	✓	✓	✓	✓
<a href="#">D742</a> <a href="#">D771</a>	2 3	2½ 3½	147-153 NW	✓	✓	✓			
<a href="#">D743</a>	1, 1½, 2, 3	2	147-153 NW 107-113 LW		✓	✓		✓	✓

# VULCRAFT® COMPOSITE DECK UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
Acoustical Material below	Acoustical Material below	Beams: W8x15, OWSJ: 10J3, 12K4 or LH Series, OWSG: 20 in. deep at 13 plf	6x6-W1.4xW1.4, or Synthetic or Steel Fibers	1, 1½, 2, 3	<a href="#">D216</a>
Acoustical Material below	Acoustical Material below	Beams: W8x15, OWSJ: 10J3, 12K4 or LH Series, OWSG: 20 in. deep at 13 plf	6x6-W1.4xW1.4	1, 1½, 2, 3	<a href="#">D219</a>
Mineral Fiber Board	Mineral Fiber Board	Beams: W8x28	6x6-10/10 SWG	1, 1½, 2	<a href="#">D303</a>
Gypsum Board below	Gypsum Board below	Beams: W8x28, OWSJ: 12K1 or LH Series, OWSG: 20 in. deep at 13 plf	6x6-W1.4xW1.4	1½, 2	<a href="#">D502</a>
SFRM	SFRM	Beams: W8x20	6x6-W2.9xW2.9	1, 1½	<a href="#">D703</a>
SFRM	SFRM	Beams: W10x17	6x6-W2.9xW2.9	1½, 3	<a href="#">D708</a> <a href="#">D768</a>
SFRM	SFRM	Beams: W8x24	6x6-10/10 SWG	1½, 2	<a href="#">D712</a>
SFRM	SFRM	Beams: W8x28	6x6-10/10 SWG	1½, 2	<a href="#">D716</a>
SFRM	SFRM	Beams: W6x12	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">D722</a>
SFRM	SFRM	None	6x6-10/10 SWG	1½, 2	<a href="#">D730</a>
SFRM	SFRM	Beams: W8x28, W6x12, OWSJ, Concrete Beams	Beams:6x6-W1.4xW1.4 Joists:6x6-W2.9xW2.9 or Synthetic Fibers	1, 1½, 2, 3, 4	<a href="#">D739</a>
SFRM	SFRM	Beams: W8x24	6x6-W1.4xW1.4	½	<a href="#">D742</a> <a href="#">D771</a>
SFRM	SFRM	Beams: W8x20, W8x28, W8x15, Concrete Beams	6x6-W1.4xW1.4	1, 1½, 2, 3	<a href="#">D743</a>

# VULCRAFT® COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>					
		Thickness (in.)	Type (pcf)	1.5VL	2VL	3VL	1.5VLP	2VLP	3VLP
<a href="#">D745</a>	2	2½	142-148 NW 108-114 LW		✓	✓			
<a href="#">D746</a>	2,3	2½	109-115 LW	✓					
<a href="#">D750</a>	2	2½	142-148 NW 105-111 LW	✓	✓	✓			
<a href="#">D752</a>	2	2½	106-112 LW	✓	✓	✓	✓	✓	✓
<a href="#">D754</a>	3, 4	¾	115-121 LW	✓	✓	✓			
<a href="#">D755</a>	2, 3	2½	147-153 NW 109-115 LW	✓	✓	✓	✓	✓	✓
<a href="#">D759</a>	1, 1½, 2, 3	2½	147-153 NW 109-115 LW	✓	✓	✓	✓	✓	✓
<a href="#">D760</a>	2, 3, 4	2½	144-150 NW 107-113 LW	✓	✓	✓			
<a href="#">D764</a>	2	2½	147-153 NW 117 LW	✓	✓	✓			
<a href="#">D767</a> <a href="#">D796</a>	1, 1½, 2, 3, 4	2½	142-148 NW 102-120 LW 110 LW with OWSJ	✓	✓	✓			
<a href="#">D775</a>	2	2½	142-148 NW 105-111 LW	✓	✓	✓			
<a href="#">D777</a>	3, 4	¾	115-121 LW	✓	✓	✓			
<a href="#">D779</a>	1, 1½, 2, 3, 4	2½	142-148 NW 102-120 LW	✓	✓	✓			
<a href="#">D780</a>	1, 1½, 2, 3	2½	147-153 NW 107-113 LW	✓	✓	✓			
<a href="#">D782</a>	1, 1½, 2, 3, 4	4½ ¾	142-148 NW 115-121 LW	✓	✓	✓			
<a href="#">D785</a>	2, 3, 4	2½	142-148 NW 102-120 LW	✓	✓	✓			
<a href="#">D786</a>	2	2½	142-148 NW 102-120 LW	✓	✓	✓			
<a href="#">D788</a>	1, 1½, 2, 3, 4	2½	NW, LW	✓	✓	✓			
<a href="#">D794</a>	2	2½	147-153 NW 117 LW	✓	✓	✓			
<a href="#">D795</a>	1, 1½, 2, 3	2½	147-153 NW 109-115 LW	✓	✓	✓			

# VULCRAFT® COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
SFRM	SFRM	Beams: W8x21, OWSJ or OWSG	6x6-W1.4xW1.4	1, 1½	<a href="#">D745</a>
SFRM	SFRM	Beams: W8x21, OWSJ or OWSG	6x6-W1.4xW1.4	2, 3	<a href="#">D746</a>
SFRM	SFRM	Beams: W8x21	6x6-W1.4xW1.4	1½, 2	<a href="#">D750</a>
SFRM	SFRM	Beams: W8x21, W8x28, OWSJ or OWSG	6x6-W1.4xW1.4	1, 1½	<a href="#">D752</a>
SFRM	SFRM	Beams: W8x28	6x6-W1.4xW1.4	1½, 2	<a href="#">D754</a>
SFRM	SFRM	Beams: W8x24, W8x28, OWSJ: 10H3, 12J6	6x6-W1.4xW1.4 only when electrical inserts are used	1, 1½, 2, 3	<a href="#">D755</a>
SFRM	SFRM	Beams: W8x28, OWSJ or OWSG	Beams:6x6-W1.4xW1.4 Joists: 6x6-W2.9xW2.9	1, 1½, 2, 3	<a href="#">D759</a>
SFRM	SFRM	Beams: W8x28, OWSJ or OWSG	6x6-W1.4xW1.4	1, 1½, 2, 3, 4	<a href="#">D760</a>
SFRM	SFRM	Beams: W8x28, OWSJ or OWSG	6x6-6/6 SWG	2	<a href="#">D764</a>
SFRM	SFRM	Beams: W8x28, W6x12, OWSJ, Concrete Beams	Beams:6x6-W1.4xW1.4 Joists:6x6-W2.9xW2.9	1, 1½, 2, 3, 4	<a href="#">D767</a> <a href="#">D796</a>
SFRM	SFRM	Beams: W8x21	6x6-W1.4xW1.4	1½, 2	<a href="#">D775</a>
SFRM	SFRM	Beams: W8x28	6x6-W1.4xW1.4	1½, 2	<a href="#">D777</a>
SFRM	SFRM	Beams: W8x28, OWSJ: 8K1	6x6-W1.4xW1.4 or Synthetic Fibers	1, 1½, 2, 3, 4	<a href="#">D779</a>
SFRM	SFRM	Beams: W8x28, OWSJ: 10K1, 12K3, 16K2	6x6-W2.0xW2.0	1, 1½, 2, 3	<a href="#">D780</a>
SFRM	SFRM	Beams: W8x28, OWSJ: Minimum 10" depth.	6x6-W1.4xW1.4	1, 1½, 2, 3, 4	<a href="#">D782</a>
SFRM	MIC	Beams: W6x16	6x6-W1.4xW1.4	1, 1½, 2, 3	<a href="#">D785</a>
SFRM	MIC	Beams: W12x106	6x6-W1.4xW1.4	1, 1½	<a href="#">D786</a>
SFRM	SFRM	Beams: W8x28, OWSJ: 10K1	6x6-8/8 SWG	1, 1½, 2, 3, 4	<a href="#">D788</a>
SFRM	SFRM	Beams: W8x28, OWSJ or OWSG	6x6-6/6 SWG	2	<a href="#">D794</a>
SFRM	SFRM	Beams: W8x28, OWSJ	Beams:6x6-W1.4xW1.4 Joists:6x6-W2.9xW2.9	1, 1½, 2, 3	<a href="#">D795</a>

# VULCRAFT® COMPOSITE DECK UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>					
		Thickness (in.)	Type (pcf)	1.5VL	2VL	3VL	1.5VLP	2VLP	3VLP
<a href="#">D798</a>	1, 1½, 2, 3, 4	2½	142-148 NW 107-113 LW	✓	✓	✓			
<a href="#">D799</a>	1, 1½, 2, 3	2½	150-153 NW 112-115 LW	✓	✓	✓			
<a href="#">D816</a>	3	2½	147-153 NW 107-113 LW	✓	✓	✓		✓	✓
<a href="#">D822</a>	2	2½	147-153 NW 110-120 LW		✓	✓		✓	✓
<a href="#">D825</a>	2	2½	147-153 NW 105-111 LW	✓	✓	✓		✓	✓
<a href="#">D831</a>	2, 3	2½	148-154 NW 117-123 LW	✓	✓	✓		✓	✓
<a href="#">D832</a>	1, 1½, 2, 3	2½	147-153 NW 109-115 LW	✓	✓	✓	✓	✓	✓
<a href="#">D833</a> <a href="#">D884</a>	2, 3	2½	147-153 NW 107-115 LW	✓	✓	✓		✓	✓
<a href="#">D840</a> <a href="#">D888</a>	2	¾	107-113 LW	✓	✓	✓	✓	✓	✓
		¾	107-120 LW	✓	✓	✓	✓	✓	✓
		¾	107-116 LW		✓	✓		✓	✓
<a href="#">D847</a>	1, 1½, 2	2½	147-153 NW 112 LW		✓	✓		✓	✓
<a href="#">D858</a> <a href="#">D891</a>	1, 1½, 2, 3, 4	2½	147-153 NW 108-115 LW		✓	✓		✓	✓
<a href="#">D859</a> <a href="#">D875</a>	1, 1½, 2, 3	2	142-148 NW 108-115 LW		✓	✓		✓	✓
<a href="#">D860</a>	2, 3, 4	¾	115-121 LW	✓	✓	✓			
<a href="#">D861</a>	2	2½	137-150 NW 109-115 LW		✓	✓			
<a href="#">D862</a>	2	2½	109-115 LW		✓	✓			
<a href="#">D871</a>	1, 1½, 2, 3	2½	147-153 NW 108-115 LW		✓	✓		✓	✓
<a href="#">D877</a>	2	2½	147-153 NW 105-111 LW	✓	✓	✓			
<a href="#">D878</a>	2	¾	108-114 LW	✓	✓	✓			
<a href="#">D883</a>	1, 1½, 2, 3	2½	147-153 NW 109-115 LW	✓	✓	✓			

# VULCRAFT® COMPOSITE DECK UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
SFRM	SFRM	Beams: W8x28, OWSJ: 10K1	Beams:6x6-10/10 SWG Joists:6x6-W1.4xW1.4 or Synthetic Fibers	1, 1½, 2, 3, 4	<a href="#">D798</a>
SFRM	SFRM	Beams: W8x28, OWSJ: 10K1 or 10 in. deep at 4.8 plf	Beams:6x6-W1.4xW1.4 Joists:6x6-W2.9xW2.9	1, 1½, 2, 3	<a href="#">D799</a>
SFRM	SFRM	Beams: W10x17, W10x25	None	1½, 2	<a href="#">D816</a>
SFRM	SFRM	Beams: W10x21	6x6-W1.4xW1.4	1	<a href="#">D822</a>
SFRM	SFRM	Beams: W8x17	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">D825</a>
SFRM	SFRM	Beams: W6x12, W8x28	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">D831</a>
SFRM	SFRM	Beams: W8x28, OWSJ	6x6-W1.4xW1.4 only when electrical inserts used	1, 1½, 2, 3	<a href="#">D832</a>
SFRM	SFRM	Beams: W10x25	WWF Optional	2, 3	<a href="#">D833</a> <a href="#">D884</a>
None	SFRM	Beams: W8x28	6x6-10/10 SWG	1½	<a href="#">D840</a> <a href="#">D888</a>
SFRM	SFRM	Beams: W6x12, W8x17, W10x25, W8x24, W8x28	6x6-W1.4xW1.4	1, 1½	<a href="#">D847</a>
SFRM	SFRM	Beams: W8x28, OWSJ, Concrete Beams	6x6-W1.4xW1.4	1, 1½, 2, 3, 4	<a href="#">D858</a>
		Beams: W10x25, Concrete Beams			<a href="#">D891</a>
SFRM	SFRM	Beams: W8x20	6x6-W1.4xW1.4	1, 1½, 2, 3	<a href="#">D859</a> <a href="#">D875</a>
SFRM	SFRM	Beams: W8x20, W8x28	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">D860</a>
SFRM	SFRM	Beams: W8x15, W10x25	6x6-W1.4xW1.4	1, 1½	<a href="#">D861</a>
SFRM	SFRM	Beams: W8x21	6x6-W1.4xW1.4	1	<a href="#">D862</a>
SFRM	SFRM	Beams: W8x21, Concrete Beams	6x6-W1.4xW1.4 or Synthetic Fibers	1, 1½, 2, 3	<a href="#">D871</a>
SFRM	SFRM	Beams: W8x17	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">D877</a>
SFRM	SFRM	Beams: W8x20	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">D878</a>
SFRM	SFRM	Beams: W8x24, W8x28	6x6-W1.4xW1.4 only when electrical inserts used	1, 1½, 2, 3	<a href="#">D883</a>

# VULCRAFT® COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>						
		Thickness (in.)	Type (pcf)	1.5VL	2VL	3VL	1.5VLP	2VLP	3VLP	
<a href="#">D898</a>	1, 1½, 2, 3	2½	147-153 NW 108-115 LW		✓	✓				
	1	3½	147-153 NW	✓	✓	✓	✓	✓	✓	
	1½	4	147-153 NW	✓	✓	✓	✓	✓	✓	
	2	4½	147-153 NW	✓	✓	✓	✓	✓	✓	
	3	5¼	147-153 NW	✓	✓	✓	✓	✓	✓	
	1	2½	107-113 LW	✓	✓	✓	✓	✓	✓	
	<a href="#">D902</a>	1	2⅝	107-120 LW	✓	✓	✓	✓	✓	✓
		1½	3	107-113 LW	✓	✓	✓	✓	✓	✓
		2	3¼	107-113 LW	✓	✓	✓	✓	✓	✓
		2	3¼	107-116 LW		✓	✓		✓	✓
2		3½	114-120 LW	✓	✓	✓	✓	✓	✓	
3		4¾	107-113 LW	✓	✓	✓	✓	✓	✓	
3		4¾	114-120 LW	✓	✓	✓	✓	✓	✓	
<a href="#">D907</a>	2	3¼	110 LW	✓	✓	✓	✓	✓	✓	
<a href="#">D913</a>	2	3¼	102 LW	✓	✓	✓	✓	✓	✓	
<a href="#">D914</a>	¾, 1	2½	110 LW	✓	✓	✓	✓	✓	✓	

# VULCRAFT® COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
SFRM	SFRM	Beams: W8x21, Concrete Beams	6x6-W1.4xW1.4 or Synthetic Fibers	1, 1½, 2, 3	<a href="#">D898</a>
None	SFRM	Beams: W8x28, W8x24, W6x12, OWSJ: 8K1, 12K5	6x6-W1.4xW1.4 or Negative Reinforcement with Synthetic Fibers	1, 1½, 2, 3	<a href="#">D902</a>
None	SFRM	Beams: W8x17, W8x28	6x6-W1.4xW1.4	1, 2	<a href="#">D907</a>
None	SFRM	Beams: W8x17	6x6-W1.4xW1.4	1	<a href="#">D913</a>
None	SFRM	Beams: W8x28	6x6-W1.4xW1.4	0	<a href="#">D914</a>

# VULCRAFT® COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>						
		Thickness (in.)	Type (pcf)	1.5VL	2VL	3VL	1.5VLP	2VLP	3VLP	
<a href="#">D916</a> <a href="#">D922</a> <a href="#">D925</a> <a href="#">D927</a> <a href="#">D929</a> <a href="#">D931</a> <a href="#">D949</a> <a href="#">D957</a> <a href="#">D958</a>	1	3½	147-153 NW	✓	✓	✓	✓	✓	✓	
	1½	4	147-153 NW	✓	✓	✓	✓	✓	✓	
	2	4½	147-153 NW	✓	✓	✓	✓	✓	✓	
	3	5¼	147-153 NW	✓	✓	✓	✓	✓	✓	
	¾ or 1	2½	107-113 LW	✓	✓	✓	✓	✓	✓	
	1	2 <sup>5</sup> / <sub>8</sub>	107-120 LW	✓	✓	✓	✓	✓	✓	
	1½	3	107-113 LW	✓	✓	✓	✓	✓	✓	
	2	3¼	107-113 LW	✓	✓	✓	✓	✓	✓	
	2	3¼	107-116 LW	✓	✓	✓	✓	✓	✓	
	2	3½	114-120 LW	✓	✓	✓	✓	✓	✓	
	3	4 <sup>3</sup> / <sub>16</sub>	107-113 LW	✓	✓	✓	✓	✓	✓	
	3	4 <sup>7</sup> / <sub>16</sub>	114-120 LW	✓	✓	✓	✓	✓	✓	
<a href="#">D919</a> <a href="#">D968</a>	1	3½	147-153 NW	✓	✓	✓	✓	✓	✓	
	1½	4	147-153 NW	✓	✓	✓	✓	✓	✓	
	2	4½	147-153 NW	✓	✓	✓	✓	✓	✓	
	3	5¼	147-153 NW	✓	✓	✓	✓	✓	✓	
	1	2½	107-113 LW	✓	✓	✓	✓	✓	✓	
	1½	3	107-113 LW	✓	✓	✓	✓	✓	✓	
	2	3¼	107-116 LW	✓	✓	✓	✓	✓	✓	
	2	3½	114-120 LW	✓	✓	✓	✓	✓	✓	
	3	4 <sup>3</sup> / <sub>16</sub>	107-113 LW	✓	✓	✓	✓	✓	✓	
	3	4 <sup>7</sup> / <sub>16</sub>	114-120 LW	✓	✓	✓	✓	✓	✓	
	<a href="#">D920</a>	2	3¼	110-120 LW		✓	✓		✓	✓
	<a href="#">D923</a>	1	3½	147-153 NW	✓	✓	✓	✓	✓	✓
1½		4	147-153 NW	✓	✓	✓	✓	✓	✓	
2		4½	147-153 NW	✓	✓	✓	✓	✓	✓	
3		5¼	147-153 NW	✓	✓	✓	✓	✓	✓	
¾ or 1		2½	107-113 LW	✓	✓	✓	✓	✓	✓	
1		2 <sup>5</sup> / <sub>8</sub>	107-120 LW	✓	✓	✓	✓	✓	✓	
1½		3	107-113 LW	✓	✓	✓	✓	✓	✓	
2		3¼	107-113 LW	✓	✓	✓	✓	✓	✓	
2		3¼	107-116 LW		✓	✓		✓	✓	
2		3½	107-120 LW	✓	✓	✓	✓	✓	✓	
3		4 <sup>3</sup> / <sub>16</sub>	107-113 LW	✓	✓	✓	✓	✓	✓	
3		4 <sup>7</sup> / <sub>16</sub>	107-120 LW	✓	✓	✓	✓	✓	✓	

# VULCRAFT® COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
None	SFRM	Beams: W8x28, OWSJ, OWSG	6x6-W1.4xW1.4	1, 1½, 2, 3	<a href="#">D916</a>
None	SFRM	Beams: W8x28, OWSJ, OWSG	6x6-10/10 SWG	3	<a href="#">D922</a>
None	SFRM	Beams: W8x28, W12x16, OWSJ: 8K1	6x6-10/10 SWG, Optional: Negative Reinforcing with Synthetic Fibers	1, 1½, 2, 3	<a href="#">D925</a>
None	SFRM	Beams: W8x28, OWSJ, OWSG	6x6-10/10 SWG	1, 1½, 2, 3	<a href="#">D927</a>
None	MFB	Beams: W8x28	6x6-10/10 SWG	1, 1½, 2	<a href="#">D929</a>
None	MIC	Beams: W8x28	6x6-10/10 SWG	1	<a href="#">D931</a>
None	SFRM	Beams: W8x28, OWSJ: 10K1	6x6-10/10 SWG	1, 1½, 2, 3	<a href="#">D949</a>
None	SFRM	Beams: W12x14, W8x28, W8x24, W6x12, OWSJ	6x6-10/10 SWG	1, 1½, 2, 3	<a href="#">D957</a>
None	SFRM	Beams: W8x28, OWSJ, OWSG	6x6-10/10 SWG	3	<a href="#">D958</a>

None	SFRM	Beams: W8x28	6x6-W1.4xW1.4	1½	<a href="#">D919</a> <a href="#">D968</a>
------	------	--------------	---------------	----	--

None	SFRM	Beams: W8x28	6x6-W1.4xW1.4	1½	<a href="#">D920</a>
------	------	--------------	---------------	----	----------------------

None	SFRM	Beams: W8x28	6x6-10/10 SWG	1½	<a href="#">D923</a>
------	------	--------------	---------------	----	----------------------

# VULCRAFT® COMPOSITE DECK UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>					
		Thickness (in.)	Type (pcf)	1.5VL	2VL	3VL	1.5VLP	2VLP	3VLP
<a href="#">D924</a> <a href="#">D969</a>	2	4 $\frac{1}{8}$	142-148 NW <sup>9</sup>	✓	✓	✓			
	3	5	142-148 NW <sup>9</sup>	✓	✓	✓			
	2	4 $\frac{3}{8}$	142-148 NW <sup>10</sup>	✓	✓	✓			
	3	5 $\frac{3}{8}$	142-148 NW <sup>10</sup>	✓	✓	✓			
	2	3 $\frac{3}{8}$	105-111 LW	✓	✓	✓			
	3	4	105-111 LW	✓	✓	✓			
<a href="#">D966</a>	2	3 $\frac{3}{4}$	102 LW	✓	✓	✓			
<a href="#">D967</a>	3/4, 1	2 $\frac{1}{2}$	110 LW	✓	✓	✓			
<a href="#">D978</a> <a href="#">D985</a>	1	3 $\frac{1}{2}$	147-153 NW	✓	✓	✓	✓	✓	✓
	1 $\frac{1}{2}$	4	147-153 NW	✓	✓	✓	✓	✓	✓
	2	4 $\frac{1}{2}$	147-153 NW	✓	✓	✓	✓	✓	✓
	3	5 $\frac{1}{4}$	147-153 NW	✓	✓	✓	✓	✓	✓
	3/4 or 1	2 $\frac{1}{2}$	107-113 LW	✓	✓	✓	✓	✓	✓
	1	2 $\frac{5}{8}$	107-120 LW	✓	✓	✓	✓	✓	✓
	1 $\frac{1}{2}$	3	107-113 LW	✓	✓	✓	✓	✓	✓
	2	3 $\frac{3}{4}$	107-113 LW	✓	✓	✓	✓	✓	✓
	2	3 $\frac{3}{4}$	107-116 LW		✓	✓		✓	✓
	2	3 $\frac{1}{2}$	114-120 LW	✓	✓	✓	✓	✓	✓
	3	4 $\frac{3}{16}$	107-113 LW	✓	✓	✓	✓	✓	✓
	3	4 $\frac{7}{16}$	114-120 LW	✓	✓	✓	✓	✓	✓
<a href="#">D981</a>	2	4 $\frac{1}{2}$	147-153 NW	✓	✓	✓	✓	✓	✓
	2	3 $\frac{3}{4}$	107-113 LW	✓	✓	✓	✓	✓	✓
	2	3 $\frac{3}{4}$	107-116 LW		✓	✓		✓	✓
	2	3 $\frac{1}{2}$	114-120 LW	✓	✓	✓	✓	✓	✓
<a href="#">D996</a>	2	3 $\frac{3}{4}$	142-148 NW		✓	✓			
<a href="#">E701</a>	1, 1 $\frac{1}{2}$ , 2, 3	2 $\frac{1}{2}$	147-153 NW 109-115 LW	✓	✓	✓	✓	✓	✓
<a href="#">E702</a>	1, 1 $\frac{1}{2}$ , 2, 3, 4	2 $\frac{1}{2}$	147-153 NW 108-115 LW		✓	✓		✓	✓
<a href="#">E703</a>	2, 3	2 $\frac{1}{2}$	142-148 NW 102-120 LW	✓	✓	✓	✓	✓	✓
<a href="#">E704</a>	2, 3, 4	2 $\frac{1}{2}$	142-148 NW 102-120 LW	✓	✓	✓	✓	✓	✓

# VULCRAFT® COMPOSITE DECK UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
None	SFRM	Beams: W8x28	Negative Reinforcing and Synthetic Fibers	1½	<a href="#">D924</a>
				1½	<a href="#">D969</a>
None	SFRM	Beams: W8x17	6x6-W1.4xW1.4	1	<a href="#">D966</a>
None	SFRM	Beams: W8x28	6x6-W1.4xW1.4	0	<a href="#">D967</a>
None	MIC	Beams: W6x16	6x6-W1.4xW1.4	1, 1½, 2, 3	<a href="#">D978</a>
None	SFRM	Beams: W8x28, OWSJ: 10K1	6x6-10/10 SWG Optional Negative Reinforcing and Synthetic Fibers	1, 1½, 2, 3	<a href="#">D985</a>
None	MIC	Beams: W6x12	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">D981</a>
None	MIC or SFRM	Beams: W8x28	Fiber Reinforcement	2	<a href="#">D996</a>
SFRM	SFRM	Beams: W8x28, Concrete Beams	6x6-W1.4xW1.4 only when electrical inserts used	1, 1½, 2, 3	<a href="#">E701</a>
SFRM	SFRM	Beams: W8x28, Concrete Beams	6x6-W1.4xW1.4	1, 1½, 2, 3, 4	<a href="#">E702</a>
SFRM	MIC	Beams: W6x16	6x6-W1.4xW1.4	1, 1½, 2	<a href="#">E703</a>
SFRM	MIC	Beams: W6x16	6x6-W1.4xW1.4	1, 1½, 2, 3	<a href="#">E704</a>

# VULCRAFT® DOVETAIL COMPOSITE DECK

## UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>	
		Thickness (in.)	Type (pcf)	2.0D	3.5D
<a href="#">D904</a> <a href="#">D961</a>	1	2	147 NW	✓	
	1½	2¾	147 NW	✓	
	2	3¼	147 NW	✓	
	3	4¾	147 NW	✓	
	2	3	130 SLW	✓	
	3	4	130 SLW	✓	
	1	2	112 LW	✓	
	2	2½	112 LW	✓	
	3	3¼	112 LW	✓	
<a href="#">D917</a> <a href="#">D928</a>	1	2	147-153 NW	✓	
	1½	2¾	147-153 NW	✓	
	2	3¼	147-153 NW	✓	
	3	4¾	147-153 NW	✓	
	2	3	130 SLW	✓	
	3	4	130 SLW	✓	
	1	2	107-113 LW	✓	
	2	2½	107-113 LW	✓	
	3	3¼	107-113 LW	✓	
<a href="#">D506</a>	2	2¼, 2	147-153 NW 107-113 LW		✓
<a href="#">D947</a> <a href="#">D964</a> <a href="#">D984</a>	1½	2	147-153 NW		✓
	2	2¼	147-153 NW		✓
	3	3¼	147-153 NW		✓
	1½	2	107-113 LW		✓
	2	2	107-113 LW		✓
	3	2¼	107-113 LW		✓

# VULCRAFT® DOVETAIL COMPOSITE DECK UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
None	SFRM	Beams: W8x28, W10x29	6x6-6/6 SWG	¾, 1, 1½	<a href="#">D904</a> <a href="#">D961</a>
None	SFRM	Beams: W10x29	6x6-6/6 SWG	¾	<a href="#">D917</a>
None	SFRM	Beams: W8x28, W10x29	6x6-W1.4xW1.4	¾, 1	<a href="#">D928</a>
None	None	Beams: W6x9	6x6-W1.4xW1.4	1	<a href="#">D506</a>
None	SFRM	Beams: W8x28, W10x29	6x6-W1.4xW1.4	¾, 1½	<a href="#">D947</a> <a href="#">D964</a> <a href="#">D984</a>

# VULCRAFT® COMPOSITE DECK UL FIRE RATED ASSEMBLIES



UL Design Number	Restrained Assembly Rating <sup>1</sup> (hr.)	Concrete Topping		Deck Type <sup>2, 4, 5, 6, 7</sup>				
		Thickness (in.)	Type (pcf)	1.5VL	2VL	3VL	0.6C	1.0C
<a href="#">G213</a>	1½, 2, 3	2½	152 NW	✓	✓	✓	✓	✓
<a href="#">G222</a>	2	2½	144-150 NW	✓	✓	✓	✓	✓
<a href="#">G227</a>	2	2½	147-153 NW	✓	✓	✓	✓	✓
<a href="#">G229</a>	1½, 2	2½	147-153 NW	✓	✓	✓	✓	✓
	3	¾	147-153 NW	✓	✓	✓	✓	✓
<a href="#">G236</a>	1½, 2	2½	147-153 NW	✓	✓	✓	✓	✓
<a href="#">G243</a>	1½, 2	2½	144-150 NW	✓	✓	✓	✓	✓
<a href="#">G547</a>	2	2½	149-155 NW	✓	✓	✓	✓	✓
	3	3						
<a href="#">G561</a>	1, 1½, 2, 3	2½	147-153 NW 108-120 LW	✓	✓	✓		✓
<a href="#">G710</a> <sup>11</sup>	1, 1½, 2, 3	¾	150 NW 117 LW	✓				
<a href="#">N789</a>	1, 1½, 2, 3, 4	2½	142-148 NW 104-120 LW	✓	✓	✓	✓	✓

# VULCRAFT® NON-COMPOSITE DECK UL FIRE RATED ASSEMBLIES



Type of Protection <sup>3</sup>		Minimum Beam or Joist	Minimum Concrete Reinforcement <sup>12</sup>	Unrestrained Assembly Rating <sup>1</sup> (hr)	UL Design Number
Deck	Beam				
Acoustical Material below	Acoustical Material below	Beams: W6x9, W8x24, OWSJ or OWSG: 10 in. deep at 4.9 plf	6x6-W1.4xW1.4	1½, 2, 3	<a href="#">G213</a>
Gypsum Board below	Gypsum Board below	Beams: W6x9, W8x24, OWSJ or OWSG: 10 in. deep at 4.9 plf	6x6-W1.4xW1.4	2	<a href="#">G222</a>
Acoustical Material below	Acoustical Material below	Beams: W6x9, OWSJ or OWSG: 10 in. deep at 4.9 plf	6x6-W1.4xW1.4	2	<a href="#">G227</a>
Acoustical Material below	Acoustical Material below	Beams: W8x24, OWSJ or OWSG: 8 in. deep	6x6-W1.4xW1.4	1½, 2, 3	<a href="#">G229</a>
Acoustical Material below	Acoustical Material below	Beams: W6x9, OWSJ or OWSG: 10 in. deep at 4.9 plf	6x6-W1.4xW1.4	1½, 2	<a href="#">G236</a>
Acoustical Material below	Acoustical Material below	Beams: W6x9, OWSJ or OWSG: 10 in. deep at 4.9 plf	6x6-W1.4xW1.4	1½, 2	<a href="#">G243</a>
Gypsum Board below	Gypsum Board below	Beams: W10x21, OWSJ or OWSG: 8K1, 10K1	6x6-W1.4xW1.4	2, 3	<a href="#">G547</a>
Gypsum Board below	Gypsum Board below	Beams: W6x9, W8x24, OWSJ or OWSG: 10 in. deep at 4.9 plf	6x6-W1.4xW1.4 or Synthetic or Steel Fibers	1, 1½, 2, 3	<a href="#">G561</a>
SFRM	SFRM	OWSJ or OWSG: 8 in. deep at 4.9 plf	6x6-W2.1xW2.1	1, 1½, 2	<a href="#">G710</a> <sup>11</sup>
None	SFRM	OWSJ or OWSG: 8K1	6x6-W1.4xW1.4	1, 1½, 2, 3, 4	<a href="#">N789</a>

**UL Fire Resistance Ratings**

Restrained Assembly Ratings (hr.)	Type of Protection	Concrete Thickness & Type	UL Design No.	Deck Type		Unrestrained Beam Rating (hr.)
				2D	3.5D	
<b>1<sup>10</sup></b>	Unprotected Deck	2" LW & 2¾" NW	D904	✓		¾
			D961	✓		¾
			D917	✓		
			D928	✓		¾
<b>1½</b>	Unprotected Deck	2" LW & 2" NW	D947		✓	
			D964		✓	
			D984		✓	
<b>2</b>	Unprotected Deck	2½" LW, 3" SLW & 3¼" NW	D904	✓		1
			D961	✓		1
			D917	✓		¾
			D928	✓		1
		2" LW & 2¼" NW	D506		✓	1
			D947		✓	¾
			D964		✓	¾
			D984		✓	¾
<b>3</b>	Unprotected Deck	3¼" LW, 4" SLW & 4¾" NW	D904	✓		1
			D961	✓		1
			D917	✓		¾
			D928	✓		1
		2¼" LW & 3¾" NW	D947		✓	1½
			D964		✓	1½
			D984		✓	1½

# VULCRAFT® NON-COMPOSITE DECK UL FIRE RATED ASSEMBLIES




## UL Fire Resistance Ratings

Restrained Assembly Ratings (hr.)	Type of Protection	Concrete Thickness & Type	UL Design No.	Deck Type				Unrestrained Beam Rating (hr.)
				0.6C	1.0C	1.3C	1.5C	
<b>1</b>	Exposed Grid	2½" NW	<b>G256 +</b>	✓	✓	✓	✓	1,2,3
	Cementitious	2½" NW & LW	<b>G701</b>	✓	✓	✓	✓	1,1½,2,3
			<b>G705</b>	✓	✓	✓	✓	1,1½,2,3
	Sprayed Fiber	2¾" NW & LW	<b>G801</b>	✓	✓	✓	✓	1,1½,2
<b>1½</b>	Exposed Grid	2" NW	<b>G229 +</b>	✓	✓	✓	✓	1½,2,3
			<b>G228 +</b>	✓	✓	✓	✓	1½,2
		2½" NW	<b>G243 +</b>	✓	✓	✓	✓	1½,2
			<b>G213 +</b>	✓	✓	✓	✓	1½,2,3
	Gypsum Board	2" NW & LW	<b>G502 +</b>	✓	✓	✓	✓	
	Cementitious	2½" NW & LW	<b>G701</b>	✓	✓	✓	✓	1,1½,2,3
			<b>G705</b>	✓	✓	✓	✓	1,1½,2,3
	Sprayed Fiber	2¾" NW & LW	<b>G801</b>	✓	✓	✓	✓	1,1½,2
<b>2</b>	Exposed Grid	2½" NW	<b>G227 +</b>	✓	✓	✓	✓	2,3
			<b>G228 +</b>	✓	✓	✓	✓	1½,2
			<b>G229 +</b>	✓	✓	✓	✓	1½,2,3
			<b>G243 +</b>	✓	✓	✓	✓	1½,2
			<b>G256 +</b>	✓	✓	✓	✓	1,2,3
			<b>G213 +</b>	✓	✓	✓	✓	1½,2,3
	Gypsum Board	2" NW	<b>G505 +</b>	✓	✓	✓	✓	
			<b>G529 +</b>	✓	✓	✓	✓	2,3
		2½" NW	<b>G514 +</b>	✓	✓	✓	✓	3
			<b>G523 +</b>	✓	✓	✓	✓	2,3
	Cementitious	2½" NW & LW	<b>G701</b>	✓	✓	✓	✓	1,1½,2,3
			<b>G705</b>	✓	✓	✓	✓	1,1½,2,3
Sprayed Fiber	2¾" NW & LW	<b>G801</b>	✓	✓	✓	✓	1,1½,2	

# VULCRAFT ROOF DECK SAMMY X-PRESS HANGING SOLUTIONS

## HANG AND BRACE YOUR MECHANICAL SYSTEMS FROM VULCRAFT ROOF AND ACOUSTICAL ROOF DECK

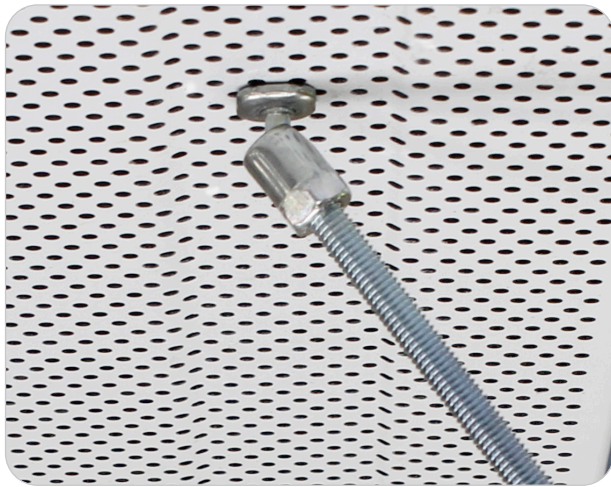

### ITW BUILDEX SAMMY X-PRESS CONNECTION STRENGTH

### GR50/GR40 DECK

SAMMY X-Press Type				Deck Type			
				Solid		Perforated	
Part Number	Model Number	Rod Size (in.)	Deck Gage	Allowable $P_n/\Omega$ (lbs)	Design $\phi P_n$ (lbs)	Allowable $P_n/\Omega$ (lbs)	Design $\phi P_n$ (lbs)
8181922	XP 200	1/4	22	328 / 277	521 / 441	229 / 194	359 / 303
8150922	XP 20	3/8	20	398 / 337	634 / 535	278 / 235	435 / 368
8294922	SXP 20	3/8	19	464 / 393	738 / 625	324 / 274	508 / 430
8272957	SXP 2.0	1/2	18	527 / 446	837 / 709	368 / 311	576 / 488
8181922	XP 200	1/4	16	664 / 562	1056 / 894	464 / 392	727 / 615
8153299	XP 35	3/8					
8295922	SXP 35	3/8					
8271957	SXP 3.5	1/2					

#### Notes:

1. The strength of the steel deck, Sammy X-Press connector, or threaded rod, bolt, and other connecting hardware shall be equal to or greater than the governing load combination as stipulated in the IBC or ASCE/SEI 7.
2. SAMMY X-Press connectors shall be installed per manufacturer's instructions.

# VULCRAFT ROOF DECK SAMMY X-PRESS HANGING SOLUTIONS

## HANG SPRINKLER PIPES FROM VULCRAFT ROOF AND ACOUSTICAL ROOF DECK






MAXIMUM SPRINKLER PIPE DIAMETER			GR50/GR40 DECK		
SAMMY X-Press Type			Deck Type		
Part Number	Model Number	Rod Size (in.)	Deck Gage	Solid (in.)	Perforated (in.)
8150922	XP 20	3/8	22	2 1/2 / 2	2 / 1 1/2
8294922	SXP 20	3/8	20	2 1/2 / 2 1/2	2 / 2
8272957	SXP 2.0	1/2	19	3 / 2 1/2	2 1/2 / 2
			18	3 1/2 / 3	2 1/2 / 2 1/2
8153299	XP 35	3/8			
8295922	SXP 35	3/8	16	4 / 4	3 1/2 / 3
8271957	SXP 3.5	1/2			



### Notes:

1. Maximum fire sprinkler pipe size in accordance with NFPA 13.
2. The strength of the steel deck, Sammy X-Press connector, or threaded rod, bolt, and other connecting hardware shall be equal to or greater than the governing load combination as stipulated in the IBC or ASCE/SEI 7 including the fire sprinkler system loading.
3. SAMMY X-Press connectors shall be installed per manufacturer's instructions.

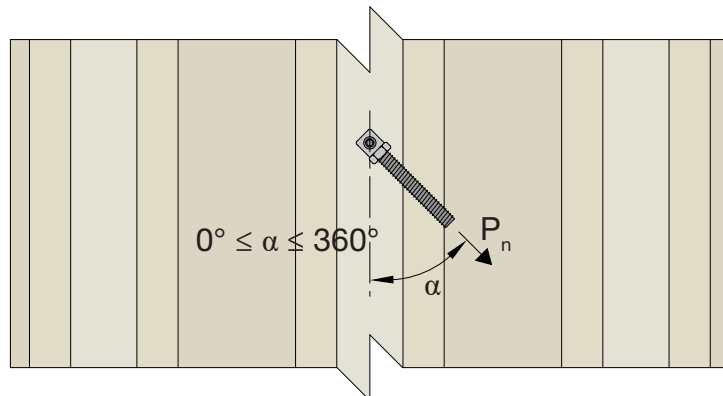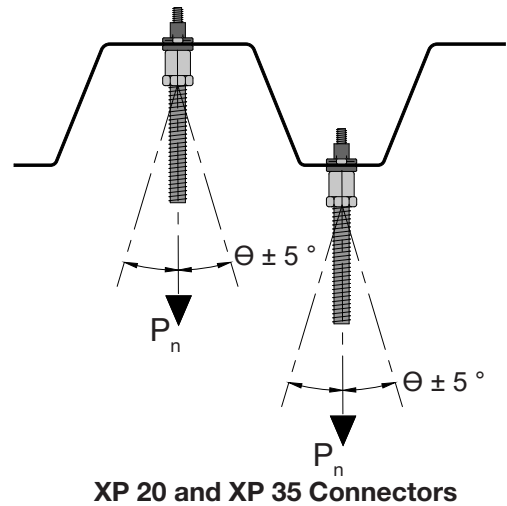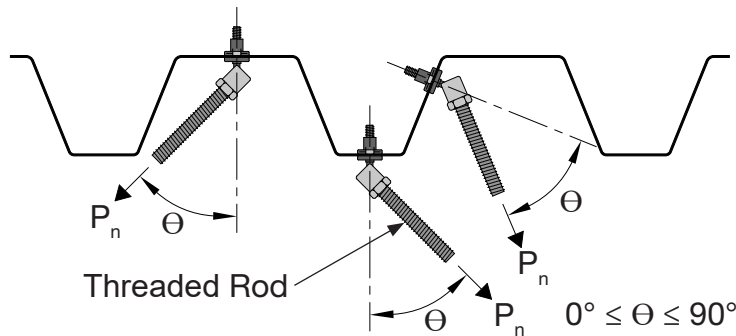

SXP 20, SXP2.0, SXP 35 and SXP 3.5 Connectors

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# DOVETAIL DECK-SLAB WEDGE-NUT HANGING SOLUTIONS

## HANG YOUR MECHANICAL SYSTEMS FROM DOVETAIL COMPOSITE DECK-SLABS

### DOVETAIL FORMLOK WEDGE-NUTS

- IAPMO UES ER-423
- UL Listed



**HANGING LOAD**  $f'_c = 2500$  psi (min.) NWC or LWC

Profile	Part Number	Connection Strength	
		Allowable $P_n / \Omega$ (lbs)	Design $\phi P_n$ (lbs)
2.0D FormLok	2.0D-WN-3/8NC	1392	2297
	2.0D-WN-1/2NC		
3.5D FormLok	3.5D-WN-3/8NC	1996	3294
	3.5D-WN-1/2NC		

**MAXIMUM SPRINKLER PIPE DIAMETER**  LISTED

Profile	Part Number	NPS	
		Diameter (in.)	UL No.
2.0D FormLok	2.0D-WN-3/8NC	4	EX27777
	2.0D-WN-1/2NC	6	
3.5D FormLok	3.5D-WN-3/8NC	4	EX27777
	3.5D-WN-1/2NC	8	

**Notes:**

1. The strength of the Dovetail FormLok Composite steel deck-slab, Wedge-Nut, or threaded rod, bolt, and other connecting hardware shall be equal or greater than the governing load combination as stipulated in the IBC or ASCE/SEI 7 including the fire sprinkler system loading.
2. Wedge-Nut connections shall be installed per manufacturer's instructions.

# DOVETAIL DECK-SLAB WEDGE-NUT HANGING SOLUTIONS

## DOVETAIL WEDGE-NUT INSTALLATION

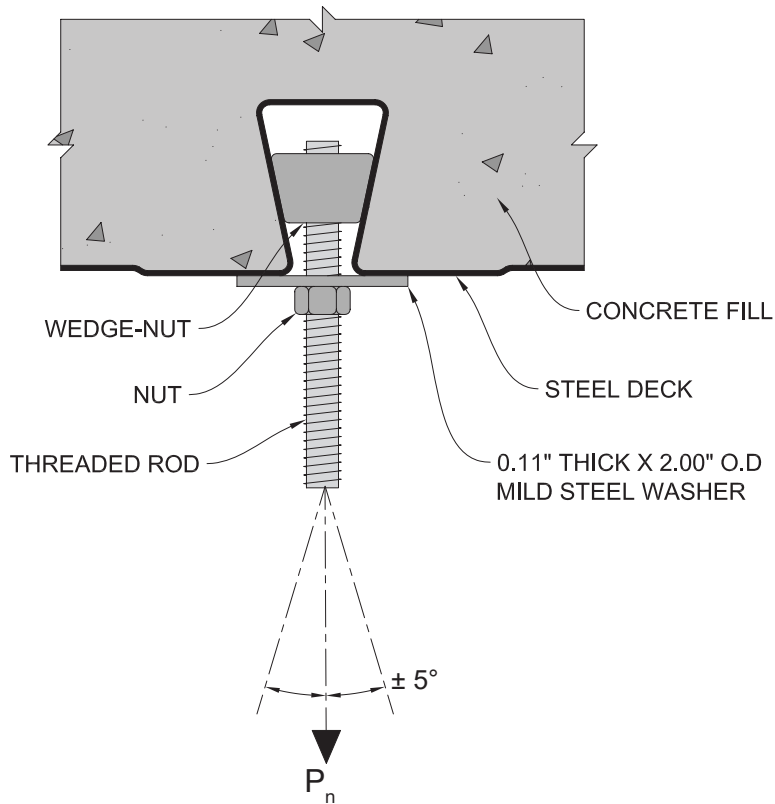


Figure 1

1. Deck ribs shall be free of foreign material to ensure the wedge-nut bears directly on the steel deck.
2. Insert wedge-nut and rotate to seat the surface against the webs of the steel deck as shown in Figure 1.
3. Position wedge-nut in the center of the rib with the threaded rod or bolt perpendicular to the bottom surface of the steel deck as shown in Figure 1.
4. Tighten the  $\frac{3}{8}$ " threaded rod or bolt 1 to  $1\frac{1}{2}$  turns beyond snug tight.
5. Tighten the  $\frac{1}{2}$ " threaded rod or bolt  $\frac{1}{2}$  to 1 turn beyond snug tight.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# PINTAIL™ ANCHOR HANGING AND BRACING SOLUTIONS for 2.0DS-30 FL / 2.0DF-30 FL COMPOSITE DECK-SLAB

## Hang and Brace Loads from 2.0DS-30 FL / 2.0DF-30 FL Composite Deck-Slabs

### PINTAIL™ ANCHOR

- IAMPO UES ER-0423

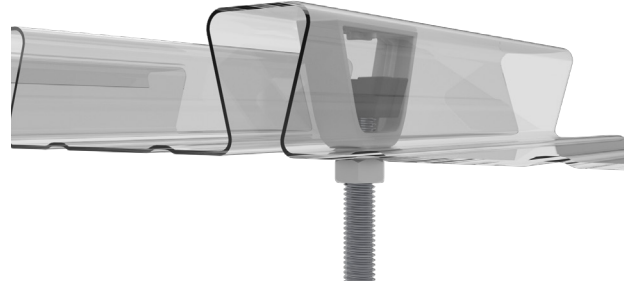

### LOAD IN ANY DIRECTION

$f'_c = 3000$  psi (min.) & 110 lb/ft<sup>3</sup> (min.)

Part Number	Threaded Rod Size (in.)	Allowable Strength, $P_n / \Omega$ (lbs)					Design Strength, $\phi P_n$ (lbs)				
		Spacing (in.)					Spacing (in.)				
		2 3/8	4	6	8	$\geq 9$ 3/8*	2 3/8	4	6	8	$\geq 9$ 3/8*
20PT3	3/8"-16	345	365	390	415	432	569	603	644	685	712
20PT4	1/2"-13	345	365	390	415	432	569	603	644	685	712

\*Minimum spacing for full strength. The minimum spacing applies to Pintail Anchors in the same or adjacent flute.



### MAXIMUM SPRINKLER PIPE DIAMETER

$f'_c = 3000$  psi

Part Number	Threaded Rod Size (in.)	Hanging NPS Diameter (in.)	Bracing NPS Diameter (in.)
20PT3	3/8"-16	4	by analysis
20PT4	1/2"-13	4	

### Notes:

1. Tabulated values show maximum load in any direction. Design for specific shear, tension, or shear/tension combinations, loads at specific angle, or for alternate concrete strength up to  $f'_c = 4,000$  psi is permissible. See IAPMO Report ER-0423 and online design tool.
2. The strength of the Dovetail FL composite steel deck-slab, PinTail anchor, threaded rod or bolt, and other connecting hardware shall be equal or greater than the governing load combination as stipulated in the IBC or ASCE/SEI 7 including the fire sprinkler system loading.
3. The effect of connection spacing interaction, between the PinTail anchors and any other connections to the composite steel-deck slab shall be considered.
4. Maximum fire sprinkler pipe size in accordance with NFPA 13 assuming minimum connector spacing and no applied shear load.
5. PinTail anchors shall be installed and inspected in accordance with manufacturer's instructions.

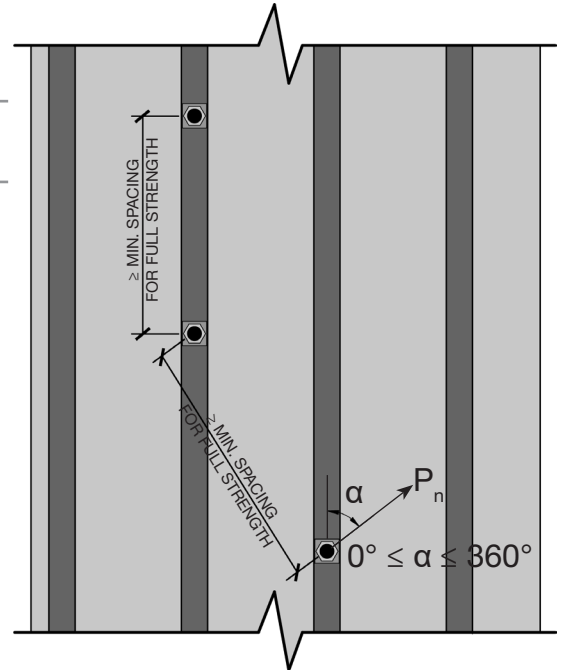

# PINTAIL™ ANCHOR HANGING AND BRACING SOLUTIONS for 3.5DS-24 FL / 3.5DF-24 FL COMPOSITE DECK-SLAB

## Hang and Brace Loads from 3.5DS-24 FL / 3.5DF-24 FL Composite Deck-Slabs

### PINTAIL™ ANCHOR

- IAMPO UES ER-0423



### LOAD IN ANY DIRECTION

$f_c = 3000$  psi (min.) & 110 lb/ft<sup>3</sup> (min.)

Part Number	Threaded Rod Size (in.)	Allowable Strength, $P_n / \Omega$ (lbs)				Design Strength, $\phi P_n$ (lbs)			
		Spacing (in.)				Spacing (in.)			
		4 3/16	12	24	≥34 3/8*	4 3/16	12	24	≥34 3/8*
35PT3	3/8"-16	479	560	683	790	791	924	1127	1303
35PT4	1/2"-13	479	560	683	790	791	924	1127	1303
35PT5	5/8"-11	479	560	683	790	791	924	1127	1303

\*Minimum spacing for full strength. The minimum spacing applies to Pintail Anchors in the same or adjacent flute.


### MAXIMUM SPRINKLER PIPE DIAMETER

$f_c = 3000$  psi


Part Number	Threaded Rod Size (in.)	Hanging NPS Diameter (in.)	Bracing NPS Diameter (in.)
35PT3	3/8"-16	4	
35PT4	1/2"-13	8	by analysis
35PT5	5/8"-11	8	

### Notes:

1. Tabulated values show maximum load in any direction. Design for specific shear, tension, or shear/tension combinations, loads at specific angle, or for alternate concrete strength up to  $f'_c = 4,000$  psi is permissible. See IAMPO Report ER-0423 and online design tool.
2. The strength of the Dovetail FL composite steel deck-slab, PinTail anchor, threaded rod, or bolt and other connecting hardware shall be equal or greater than the governing load combination as stipulated in the IBC or ASCE/SEI 7 including the fire sprinkler system loading.
3. The effect of connection spacing interaction, between the PinTail anchors and any other connections to the composite steel-deck slab shall be considered.
4. Maximum fire sprinkler pipe size in accordance with NFPA 13 assuming minimum connector spacing and no applied shear load.
5. PinTail anchors shall be installed and inspected in accordance with manufacturer's instructions.

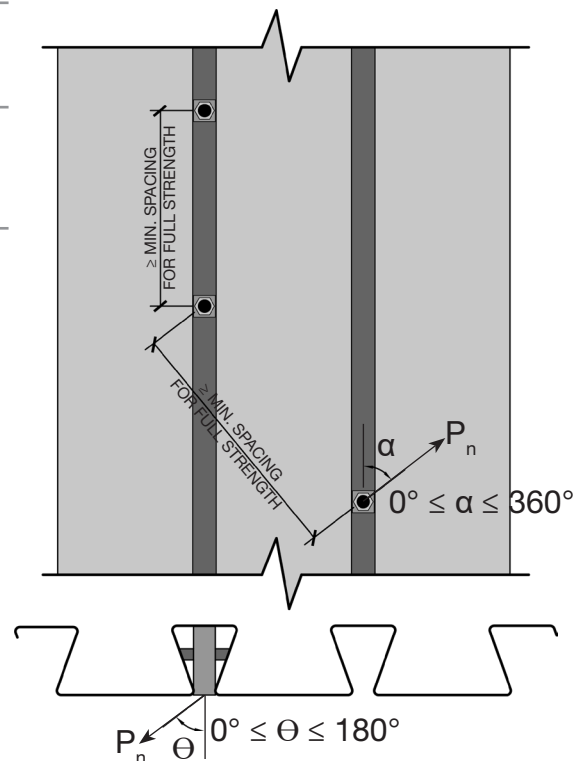

# PINTAIL™ ANCHOR HANGING AND BRACING SOLUTIONS INSTALLATION INSTRUCTIONS

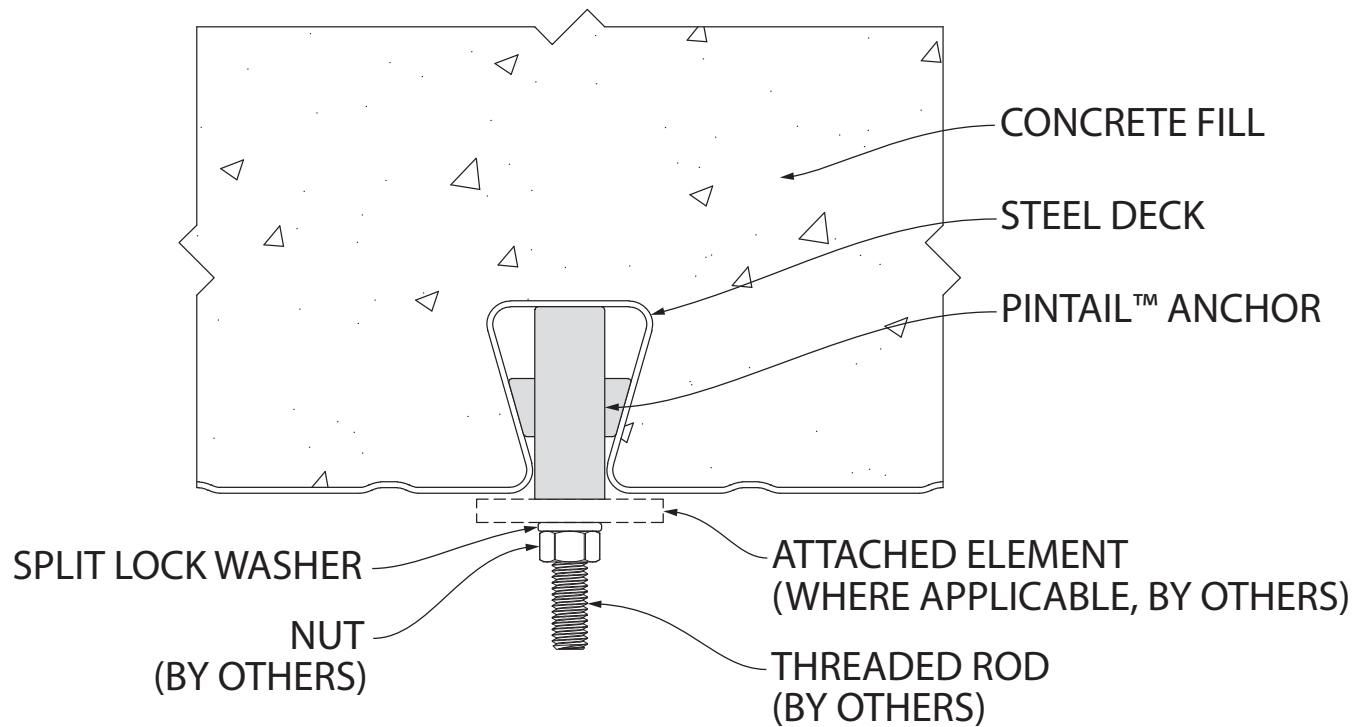

## INSTALLATION:

1. Ensure deck rib is free of foreign material.
2. Insert threaded rod into PinTail™ anchor and thread into wedgenut.
3. Insert PinTail™ anchor into steel deck.
4. Push in threaded rod and rotate wedgenut 90 degrees.
5. Release threaded rod to seat the wedgenut against the webs of steel deck.
6. Attach element (where applicable) followed by split lock washer and nut.
7. Tighten nut until split lock washer is fully compressed.



UES ER-0423

The image shows a close-up, perspective view of several interlocking metal roof decking panels. The panels are a dark grey color with a slightly textured surface. They are arranged in a row, overlapping each other. A solid green horizontal banner is superimposed over the middle of the panels, containing the text "ROOF DECK" in white, bold, uppercase letters.


# ROOF DECK

# 2.0D DOVETAIL ROOF DECK GRADE 40 STEEL



ASD

## 2.0D DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

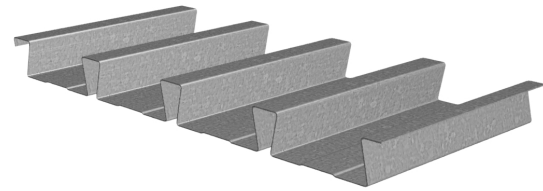

## Nominal Dimensions

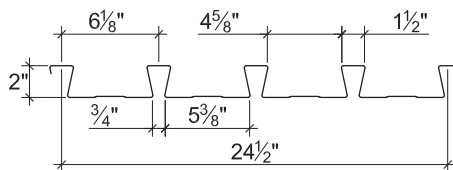

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_o)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	2.1	0.0295	40	0.387	0.359	0.272	0.272	543	543	2896
20	2.6	0.0358	40	0.472	0.447	0.343	0.334	684	666	3498
18	3.4	0.0474	40	0.626	0.612	0.463	0.450	924	898	4584
16	4.3	0.0598	40	0.792	0.791	0.587	0.576	1172	1150	5723

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
22	653	717	826	917	1281	1516	702	757	848	925	1567	1877
20	931	1020	1170	1296	1823	2146	1058	1136	1266	1376	2258	2690
18	1556	1697	1933	2132	3036	3544	1893	2023	2239	2422	3813	4507
16	2378	2582	2926	3215	4629	5360	3043	3237	3563	3837	5866	6880

## Standard Features

- ASTM A653 SS GR 40 Min. with G90
- Standard lengths – 6'-0" to 42'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423, FM and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 19 gage
  - Short cuts < 6'-0"
  - Alternative metallic and painted finishes
- Acoustical Version

# 2.0D DOVETAIL ROOF DECK GRADE 40 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
22	Single	$W_n / \Omega$	272	174	121	89	68	54	43	36	30	26	22
		L/240	---	---	117	74	50	35	25	19	15	12	9
	Double	$W_n / \Omega$	264	171	119	88	67	53	43	36	30	26	22
		L/240	---	---	---	---	---	---	---	---	---	---	21
	Triple	$W_n / \Omega$	327	212	148	109	84	67	54	45	38	32	28
		L/240	---	---	---	---	---	61	44	33	26	20	16
20	Single	$W_n / \Omega$	342	219	152	112	86	68	55	45	38	32	28
		L/240	---	---	143	90	60	42	31	23	18	14	11
	Double	$W_n / \Omega$	324	209	146	108	83	65	53	44	37	31	27
		L/240	---	---	---	---	---	---	---	---	---	---	26
	Triple	$W_n / \Omega$	401	260	182	134	103	82	66	55	46	39	34
		L/240	---	---	---	---	---	76	55	42	32	25	20
18	Single	$W_n / \Omega$	462	296	205	151	115	91	74	61	51	44	38
		L/240	---	---	190	120	80	56	41	31	24	19	15
	Double	$W_n / \Omega$	436	282	197	145	111	88	72	59	50	42	37
		L/240	---	---	---	---	---	---	---	---	---	---	35
	Triple	$W_n / \Omega$	539	350	245	181	139	110	89	74	62	53	46
		L/240	---	---	---	---	---	104	76	57	44	34	28
16	Single	$W_n / \Omega$	586	375	260	191	146	116	94	77	65	55	48
		L/240	---	---	240	151	101	71	52	39	30	24	19
	Double	$W_n / \Omega$	558	361	252	186	143	113	92	76	64	54	47
		L/240	---	---	---	---	---	---	---	---	---	---	46
	Triple	$W_n / \Omega$	688	447	313	231	178	141	114	94	79	68	58
		L/240	---	---	---	---	---	134	98	74	57	45	36

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3.5D DOVETAIL ROOF DECK GRADE 40 STEEL



ASD

## 3.5D DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

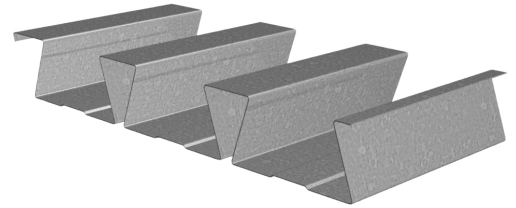

## Nominal Dimensions

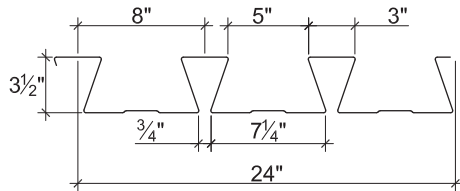

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	3.3	0.0358	40	1.762	1.646	0.676	0.781	1349	1559	3435
18	4.3	0.0474	40	2.415	2.272	0.980	1.070	1956	2136	6012
16	5.4	0.0598	40	3.133	2.968	1.317	1.377	2629	2749	8313

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
20	693	794	880	955	1459	1670	714	796	865	926	1724	1991
18	1168	1330	1467	1588	2422	2753	1310	1450	1568	1672	2927	3360
16	1793	2032	2233	2410	3681	4162	2137	2352	2533	2693	4515	5157

## Standard Features

- ASTM A653 SS GR 40 Min. with G90
- Standard lengths – 6'-0" to 42'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423, FM and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 19 gage
  - Short cuts < 6'-0"
  - Alternative metallic and painted finishes
- Acoustical Version

# 3.5D DOVETAIL ROOF DECK GRADE 40 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"
20	Single	$W_n / \Omega$	89	75	64	55	48	42	37	33	30	27	24
		L/240	87	67	53	42	34	28	24	20	17	14	12
	Double	$W_n / \Omega$	101	85	73	63	55	48	43	38	34	31	28
		L/240	---	---	---	---	---	---	---	---	---	---	28
	Triple	$W_n / \Omega$	125	106	90	78							
		L/240	---	---	---	74							
18	Single	$W_n / \Omega$	129	109	93	80	70	61	54	48	43	39	35
		L/240	119	92	72	58	47	39	32	27	23	20	17
	Double	$W_n / \Omega$	139	117	100	86	75	66	59	52	47	43	39
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	173	146	125	108							
		L/240	---	---	---	102							
16	Single	$W_n / \Omega$	174	146	124	107	93	82	73	65	58	53	48
		L/240	154	119	93	75	61	50	42	35	30	26	22
	Double	$W_n / \Omega$	180	151	129	111	97	85	76	68	61	55	50
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	224	188	161	139							
		L/240	---	---	---	134							

**Notes:**

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol “---” indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2.0DS-30 DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 2.0DS-30 DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

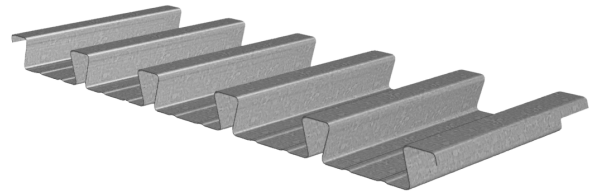

## Nominal Dimensions

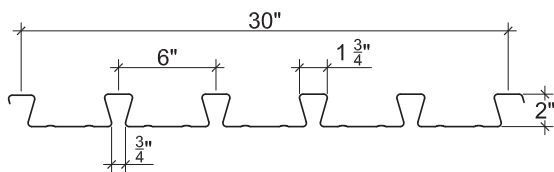

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_o)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	2.2	0.0299	50	0.430	0.382	0.301	0.306	752	763	3334
20	2.7	0.0359	50	0.520	0.473	0.378	0.373	943	930	3978
18	3.6	0.0478	50	0.695	0.661	0.527	0.509	1315	1269	5229
16	4.5	0.0598	50	0.872	0.856	0.667	0.648	1664	1617	6455

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1½"	2"	3"	4"	3"	5"	1½"	2"	3"	4"	3"	5"
22	833	916	1054	1171	1557	1794	859	926	1037	1130	1905	2217
20	1166	1278	1465	1622	2186	2503	1272	1366	1523	1655	2706	3130
18	1970	2148	2446	2698	3707	4201	2322	2480	2745	2968	4656	5331
16	2964	3218	3646	4007	5590	6279	3684	3919	4313	4646	7085	8040

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423, FM and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 21, 19 or 17 gage
  - Alternative metallic and painted finishes
- Acoustical Version

# 2.0DS-30 DOVETAIL ROOF DECK GRADE 50 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
22	Single	$W_n / \Omega$	376	241	167	123	94	74	60	50	42	36	31
		L/240	---	226	131	82	55	39	28	21	16	13	10
	Double	$W_n / \Omega$	367	238	166	123	94	75	61	50	42	36	31
		L/240	---	---	---	---	---	---	60	45	35	27	22
	Triple	$W_n / \Omega$	451	294	206	153	117	93	76	63	53	45	
		L/240	---	---	---	138	92	65	47	36	27	22	
20	Single	$W_n / \Omega$	471	302	209	154	118	93	75	62	52	45	38
		L/240	---	273	158	99	67	47	34	26	20	16	12
	Double	$W_n / \Omega$	446	290	203	150	115	91	74	61	51	44	38
		L/240	---	---	---	---	---	---	---	56	43	34	27
	Triple	$W_n / \Omega$	548	358	252	186	143	113	92	76	64	55	
		L/240	---	---	---	171	114	80	59	44	34	27	
18	Single	$W_n / \Omega$	658	421	292	215	164	130	105	87	73	62	54
		L/240	---	364	211	133	89	62	46	34	26	21	17
	Double	$W_n / \Omega$	607	395	276	204	157	124	101	83	70	60	52
		L/240	---	---	---	---	---	---	---	78	60	48	38
	Triple	$W_n / \Omega$	745	487	343	254	195	155	126	104	87	75	
		L/240	---	---	---	239	160	112	82	61	47	37	
16	Single	$W_n / \Omega$	832	532	370	272	208	164	133	110	92	79	68
		L/240	---	457	265	167	112	78	57	43	33	26	21
	Double	$W_n / \Omega$	772	502	352	260	200	158	128	106	89	76	66
		L/240	---	---	---	---	---	---	---	102	78	62	49
	Triple	$W_n / \Omega$	946	619	436	323	248	197	160	132	111	95	
		L/240	---	---	---	309	207	145	106	80	61	48	

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol “---” indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2.0DF-30 DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 2.0DF-30 DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

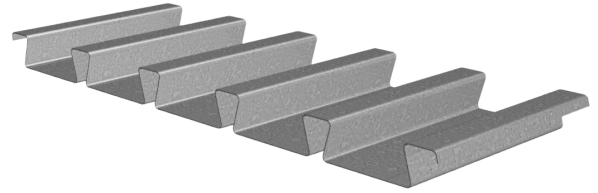

## Nominal Dimensions

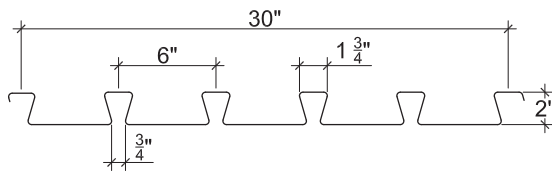

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_o)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	2.7	0.0359	50	0.524	0.468	0.380	0.344	947	859	3978
18	3.6	0.0478	50	0.699	0.660	0.530	0.491	1322	1225	5229
16	4.5	0.0598	50	0.877	0.857	0.670	0.632	1673	1576	6455

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
20	1166	1278	1465	1622	2186	2503	1272	1366	1523	1655	2706	3130
18	1970	2148	2446	2698	3707	4201	2322	2480	2745	2968	4656	5331
16	2964	3218	3646	4007	5590	6279	3684	3919	4313	4646	7085	8040

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423, FM and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 22, 21, 19 or 17 gage
  - Alternative metallic and painted finishes
- Acoustical Version

# 2.0DF-30 DOVETAIL ROOF DECK GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
20	Single	$W_n / \Omega$	474	303	211	155	118	94	76	63	53	45	39
		L/240	---	275	159	100	67	47	34	26	20	16	13
	Double	$W_n / \Omega$	415	269	188	139	106	84	68	57	48	41	35
		L/240	---	---	---	---	---	---	---	56	43	34	27
	Triple	$W_n / \Omega$	511	333	233	172	132	105	85	70	59	51	
		L/240	---	---	---	169	113	79	58	44	34	26	
18	Single	$W_n / \Omega$	661	423	294	216	165	131	106	87	73	63	54
		L/240	---	367	212	134	89	63	46	34	27	21	17
	Double	$W_n / \Omega$	588	382	267	197	151	120	97	81	68	58	50
		L/240	---	---	---	---	---	---	---	78	60	47	38
	Triple	$W_n / \Omega$	722	472	331	245	189	149	121	100	84	72	
		L/240	---	---	---	238	160	112	82	61	47	37	
16	Single	$W_n / \Omega$	836	535	372	273	209	165	134	111	93	79	68
		L/240	---	460	266	168	112	79	57	43	33	26	21
	Double	$W_n / \Omega$	754	490	343	253	195	154	125	104	87	74	64
		L/240	---	---	---	---	---	---	---	102	78	62	49
	Triple	$W_n / \Omega$	925	605	425	315	242	192	156	129	109	93	
		L/240	---	---	---	309	207	146	106	80	61	48	

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "—" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3.5DS-24 DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 3.5DS-24 DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

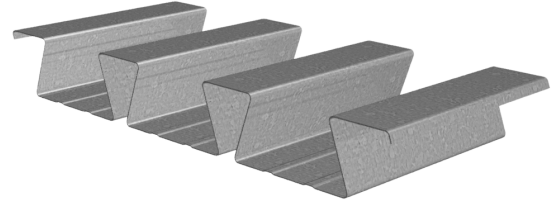

## Nominal Dimensions

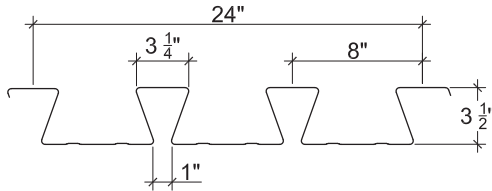

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	3.4	0.0359	50	1.951	1.805	0.714	0.757	1781	1889	3754
18	4.5	0.0478	50	2.681	2.505	1.052	1.108	2626	2765	6813
16	5.6	0.0598	50	3.421	3.243	1.414	1.505	3527	3756	9781

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
20	859	985	1091	1184	1735	1985	850	948	1030	1103	2046	2363
18	1465	1668	1840	1991	2933	3334	1592	1762	1905	2031	3542	4066
16	2217	2512	2760	2979	4415	4992	2565	2823	3040	3232	5411	6179

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423, FM and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 19 or 17 gage
  - Alternative metallic and painted finishes
- Acoustical Version

# 3.5DS-24 DOVETAIL ROOF DECK GRADE 50 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"
20	Single	$W_n / \Omega$	118	99	84	73	63	56	49	44	39	36	32
		L/240	96	74	58	47	38	31	26	22	19	16	14
	Double	$W_n / \Omega$	122	103	88	76	66	58	52	46	42	37	
		L/240	---	---	---	---	---	---	---	---	---	36	
	Triple	$W_n / \Omega$	151	127	109								
		L/240	---	---	102								
18	Single	$W_n / \Omega$	174	146	124	107	93	82	73	65	58	53	48
		L/240	132	102	80	64	52	43	36	30	26	22	19
	Double	$W_n / \Omega$	180	151	129	112	97	86	76	68	61	55	
		L/240	---	---	---	---	---	---	---	68	58	49	
	Triple	$W_n / \Omega$	223	188	161								
		L/240	---	179	141								
16	Single	$W_n / \Omega$	233	196	167	144	125	110	98	87	78	71	64
		L/240	168	130	102	82	66	55	46	38	33	28	24
	Double	$W_n / \Omega$	245	206	176	152	132	117	103	92	83	75	
		L/240	---	---	---	---	---	---	---	88	75	64	
	Triple	$W_n / \Omega$	304	256	219								
		L/240	302	232	183								

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol “---” indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3.5DF-24 DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 3.5DF-24 DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

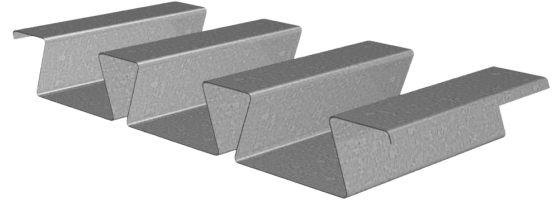

## Nominal Dimensions

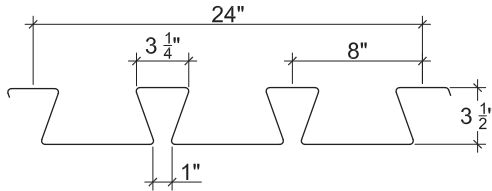

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
18	4.5	0.0478	50	2.688	2.496	1.055	0.935	2633	2333	6813
16	5.6	0.0598	50	3.430	3.256	1.417	1.289	3536	3217	9781

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
18	1465	1668	1840	1991	2933	3334	1592	1762	1905	2031	3542	4066
16	2217	2512	2760	2979	4415	4992	2565	2823	3040	3232	5411	6179

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423, FM and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 17 gage
  - Short cuts < 6'-0"
  - Alternative metallic and painted finishes
- Acoustical Version

# 3.5DF-24 DOVETAIL ROOF DECK GRADE 50 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"
18	Single	$W_n / \Omega$	174	146	125	107	94	82	73	65	58	53	48
		L/240	132	102	80	64	52	43	36	30	26	22	19
	Double	$W_n / \Omega$	152	128	110	95	82	73	64	57	51	46	
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	190	160	136								
		L/240	---	---	---								
16	Single	$W_n / \Omega$	234	196	167	144	126	110	98	87	78	71	64
		L/240	169	130	102	82	67	55	46	39	33	28	24
	Double	$W_n / \Omega$	210	177	151	130	114	100	89	79	71	64	
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	262	220	188								
		L/240	---	---	183								

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.


# 1.5B-36/1.5BI-36/1.5PLB-36 ROOF DECKS

## GRADE 50 STEEL



ASD

### 1.5B ROOF DECKS

- 1.5B-36 Deck used with Side-lap Screws
- 1.5BI-36 Deck used with TSWs or BPs
- 1.5PLB-36 Deck used with PunchLok® II System

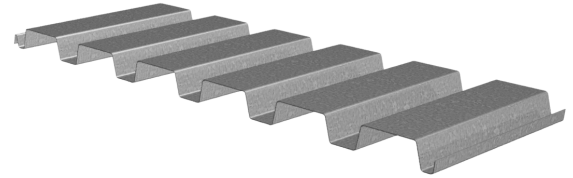

### Nominal Dimensions

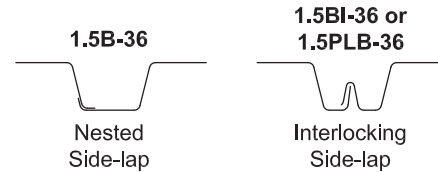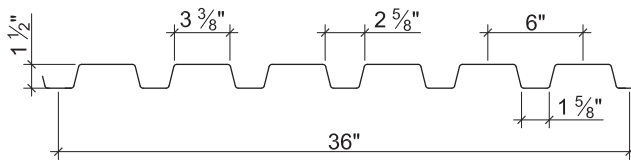

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.6	0.0295	50	0.155	0.178	0.169	0.179	422	447	2654
20	2.0	0.0358	50	0.197	0.217	0.224	0.229	559	571	3207
19	2.3	0.0418	50	0.239	0.257	0.266	0.278	663	693	3728
18	2.6	0.0474	50	0.277	0.290	0.306	0.318	763	793	4209
16	3.3	0.0598	50	0.364	0.367	0.393	0.402	981	1003	5261

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
22	807	887	1021	1115	1482	1602	842	908	1017	1093	1834	1994
20	1153	1263	1448	1574	2127	2289	1274	1368	1525	1632	2662	2881
19	1532	1674	1913	2071	2839	3043	1766	1891	2100	2239	3579	3859
18	1931	2105	2398	2588	3586	3831	2297	2454	2716	2887	4546	4884
16	2958	3212	3639	3900	5517	5855	3713	3950	4347	4590	7050	7523

### Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR50 Min. with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652, UL, and FM Listed
- Tables conform to ANSI/SDI RD-2017

### Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Web Perforated Acoustical Versions

# 1.5B-36/1.5BI-36/1.5PLB-36 ROOF DECKS GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			2'-0"	3'-0"	4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
22	Single	$W_n / \Omega$	843	375	211	135	94	69	53	42	34	28	23
		L/240	---	---	159	81	47	30	20	14	10	8	6
	Double	$W_n / \Omega$	823	382	219	141	98	72	56	44	36	29	25
		L/240	---	---	---	---	---	---	55	39	28	21	16
	Triple	$W_n / \Omega$	997	470	271	175	122	90	69	55	44	37	31
		L/240	---	---	---	---	102	64	43	30	22	17	13
20	Single	$W_n / \Omega$	1117	497	279	179	124	91	70	55	45	37	31
		L/240	---	478	202	103	60	38	25	18	13	10	7
	Double	$W_n / \Omega$	1044	487	279	180	126	93	71	56	46	38	32
		L/240	---	---	---	---	---	---	67	47	34	26	20
	Triple	$W_n / \Omega$	1260	598	345	223	156	115	88	70	57	47	40
		L/240	---	---	---	215	124	78	52	37	27	20	16
19	Single	$W_n / \Omega$	1327	590	332	212	147	108	83	66	53	44	37
		L/240	---	580	245	125	73	46	31	21	16	12	9
	Double	$W_n / \Omega$	1257	589	338	218	152	112	86	68	55	46	38
		L/240	---	---	---	---	---	---	79	56	41	30	23
	Triple	$W_n / \Omega$	1514	722	417	271	189	140	107	85	69	57	48
		L/240	---	---	---	254	147	93	62	44	32	24	18
18	Single	$W_n / \Omega$	1527	679	382	244	170	125	95	75	61	50	42
		L/240	---	673	284	145	84	53	35	25	18	14	11
	Double	$W_n / \Omega$	1435	673	386	249	174	128	98	78	63	52	44
		L/240	---	---	---	---	---	---	89	63	46	34	27
	Triple	$W_n / \Omega$	1727	825	477	310	217	160	123	97	79	65	55
		L/240	---	---	---	287	166	105	70	49	36	27	21
16	Single	$W_n / \Omega$	1962	872	490	314	218	160	123	97	78	65	54
		L/240	---	---	373	191	110	70	47	33	24	18	14
	Double	$W_n / \Omega$	1811	850	488	315	220	162	124	99	80	66	56
		L/240	---	---	---	---	---	---	113	79	58	44	34
	Triple	$W_n / \Omega$	2177	1041	603	391	274	202	155	123	100	82	69
		L/240	---	---	---	363	210	132	89	62	45	34	26

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.5B-36/1.5BI-36/1.5PLB-36 ROOF DECKS GRADE 80 STEEL



ASD

## 1.5B ROOF DECKS

- 1.5B-36 Deck used with Side-lap Screws
- 1.5BI-36 Deck used with TSWs or BPs
- 1.5PLB-36 Deck used with PunchLok® II System

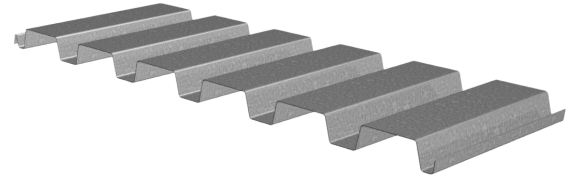

## Nominal Dimensions

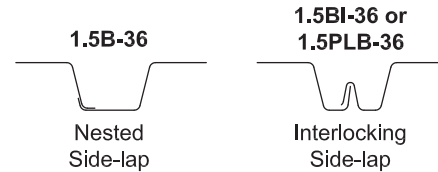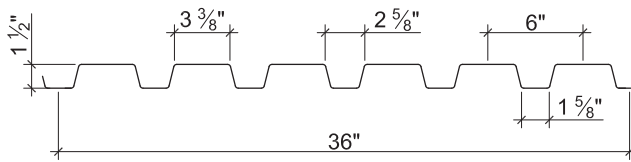

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
24	1.3	0.0239	60	0.118	0.138	0.120	0.131	359	392	1551
22	1.6	0.0295	60	0.151	0.175	0.162	0.173	485	518	3186
20	2.0	0.0358	60	0.192	0.217	0.215	0.223	644	668	3848
19	2.3	0.0418	60	0.232	0.254	0.263	0.271	787	811	4473
18	2.6	0.0474	60	0.272	0.290	0.302	0.315	904	943	5051

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
24	657	724	837	918	1197	1300	639	691	778	840	1460	1594
22	969	1065	1226	1338	1778	1922	1011	1089	1220	1312	2201	2392
20	1383	1515	1737	1888	2553	2747	1529	1641	1830	1959	3195	3458
19	1839	2009	2295	2486	3406	3652	2120	2269	2520	2687	4295	4631
18	2317	2526	2878	3105	4303	4597	2757	2944	3260	3464	5455	5861

## Standard Features

- ASTM A653 SS GR80, with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR80 with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652, UL, and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Web Perforated Acoustical Versions
- 24ga cover width varies by producing division
- Contact Vulcraft for more information

# 1.5B-36/1.5BI-36/1.5PLB-36 ROOF DECKS

## GRADE 80 STEEL

ASD

### Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			2'-0"	3'-0"	4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
24	Single	$W_n / \Omega$	719	319	180	115	80	59	45	35	29	24	20
		L/240	---	287	121	62	36	23	15	11	8	6	4
	Double	$W_n / \Omega$	663	321	187	122	85	63	48	38	31	26	22
		L/240	---	---	---	---	---	---	43	30	22	16	13
	Triple	$W_n / \Omega$	781	389	229	150	106	78	60	48	39	32	27
		L/240	---	---	---	137	79	50	33	23	17	13	10
22	Single	$W_n / \Omega$	970	431	243	155	108	79	61	48	39	32	27
		L/240	---	367	155	79	46	29	19	14	10	7	6
	Double	$W_n / \Omega$	960	444	254	164	114	84	64	51	41	34	29
		L/240	---	---	---	---	---	81	54	38	28	21	16
	Triple	$W_n / \Omega$	1164	547	315	203	142	105	80	64	52	43	36
		L/240	---	---	---	173	100	63	42	30	22	16	13
20	Single	$W_n / \Omega$	1287	572	322	206	143	105	80	64	51	43	36
		L/240	---	466	197	101	58	37	25	17	13	9	7
	Double	$W_n / \Omega$	1225	570	326	211	147	108	83	66	53	44	37
		L/240	---	---	---	---	---	100	67	47	34	26	20
	Triple	$W_n / \Omega$	1481	701	404	261	183	135	103	82	66	55	46
		L/240	---	---	---	215	124	78	52	37	27	20	16
19	Single	$W_n / \Omega$	1575	700	394	252	175	129	98	78	63	52	44
		L/240	---	563	238	122	70	44	30	21	15	11	9
	Double	$W_n / \Omega$	1478	690	396	255	178	131	101	80	65	53	45
		L/240	---	---	---	---	---	117	78	55	40	30	23
	Triple	$W_n / \Omega$	1782	847	489	317	222	164	126	99	81	67	56
		L/240	---	---	---	252	146	92	61	43	31	24	18
18	Single	$W_n / \Omega$	1808	804	452	289	201	148	113	89	72	60	50
		L/240	---	660	279	143	83	52	35	24	18	13	10
	Double	$W_n / \Omega$	1709	800	459	297	207	153	117	93	75	62	52
		L/240	---	---	---	---	---	134	89	63	46	34	27
	Triple	$W_n / \Omega$	2057	982	568	368	258	190	146	116	94	78	65
		L/240	---	---	561	287	166	105	70	49	36	27	21

#### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NL-32/3NI-32/3PLN-32 ROOF DECKS GRADE 50 STEEL


ASD

## 32" WIDE 3N ROOF DECKS

- 3NL-32 Deck used with Side-lap Screws
- 3NI-32 Deck used with TSWs or BPs
- 3PLN-32 Deck used with PunchLok® II System



## Nominal Dimensions

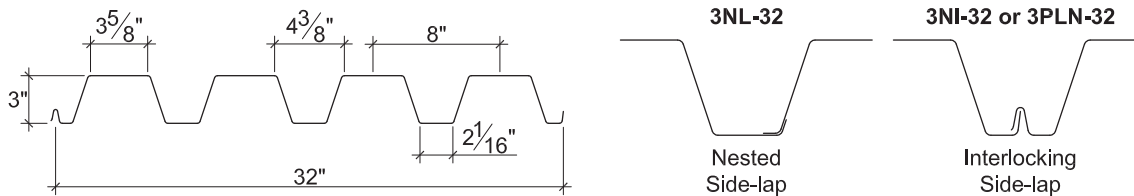

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.8	0.0295	50	0.643	0.715	0.345	0.372	861	928	2176
20	2.2	0.0358	50	0.806	0.886	0.448	0.476	1118	1187	3761
19	2.6	0.0418	50	0.965	1.052	0.554	0.579	1382	1445	5127
18	2.9	0.0474	50	1.123	1.200	0.660	0.675	1647	1684	6598
16	3.7	0.0598	50	1.479	1.524	0.869	0.885	2168	2208	9064

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	536	589	678	753	1185	1377	508	547	613	669	1380	1620
20	774	848	972	1077	1697	2101	788	846	944	1026	2014	2529
19	1036	1132	1294	1430	2258	2842	1112	1190	1322	1433	2715	3471
18	1313	1432	1631	1799	2847	3565	1464	1563	1731	1872	3454	4397
16	2031	2206	2499	2746	4365	5416	2414	2568	2826	3043	5374	6781

## Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR50 Min. with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652, UL, and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Web Perforated Acoustical Versions

# 3NL-32/3NI-32/3PLN-32 ROOF DECKS GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	6'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"
22	Single	$W_n / \Omega$	431	191	108	85	69	57	48	35	27	21	17
		L/240	---	---	82	58	42	32	24	15	10	7	5
	Double	$W_n / \Omega$	409	194	112	89	73	60	51	37	29	23	18
		L/240	---	---	---	---	---	---	---	---	28	19	14
	Triple	$W_n / \Omega$	489	237	138	110	90	75	63	47			
		L/240	---	---	---	---	88	66	51	32			
20	Single	$W_n / \Omega$	559	248	140	110	89	74	62	46	35	28	22
		L/240	---	245	103	72	53	40	31	19	13	9	7
	Double	$W_n / \Omega$	552	255	146	116	94	78	65	48	37	29	24
		L/240	---	---	---	---	---	---	---	---	34	24	17
	Triple	$W_n / \Omega$	671	315	181	143	117	97	81	60			
		L/240	---	---	---	---	110	82	63	40			
19	Single	$W_n / \Omega$	691	307	173	136	111	91	77	56	43	34	28
		L/240	---	293	124	87	63	48	37	23	15	11	8
	Double	$W_n / \Omega$	681	313	178	141	114	95	80	59	45	36	29
		L/240	---	---	---	---	---	---	---	---	41	28	21
	Triple	$W_n / \Omega$	832	386	221	175	142	118	99	73			
		L/240	---	---	---	---	130	98	75	47			
18	Single	$W_n / \Omega$	823	366	206	163	132	109	91	67	51	41	33
		L/240	---	341	144	101	74	55	43	27	18	13	9
	Double	$W_n / \Omega$	802	366	208	165	134	111	93	68	52	41	34
		L/240	---	---	---	---	---	---	---	---	46	32	24
	Triple	$W_n / \Omega$	983	453	258	205	167	138	116	85			
		L/240	---	---	---	204	149	112	86	54			
16	Single	$W_n / \Omega$	1084	482	271	214	173	143	120	89	68	54	43
		L/240	---	449	189	133	97	73	56	35	24	17	12
	Double	$W_n / \Omega$	1056	481	273	216	175	145	122	90	69	54	44
		L/240	---	---	---	---	---	---	---	88	59	41	30
	Triple	$W_n / \Omega$	1296	596	339	269	219	181	152	112			
		L/240	---	---	---	259	189	142	109	69			

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.


# 3NL-32/3NI-32/3PLN-32 ROOF DECKS

## GRADE 80 STEEL


ASD

### 32" WIDE 3N ROOF DECKS

- 3NL-32 Deck used with Side-lap Screws
- 3NI-32 Deck used with TSWs or BPs
- 3PLN-32 Deck used with PunchLok® II System

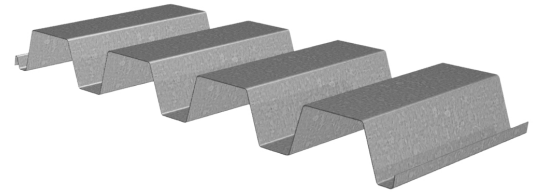

### Nominal Dimensions

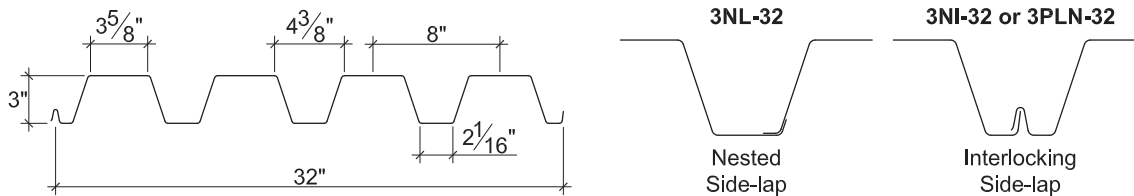

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.8	0.0295	60	0.635	0.707	0.335	0.346	1003	1036	2176
20	2.2	0.0358	60	0.794	0.876	0.434	0.463	1299	1386	3899
19	2.6	0.0418	60	0.950	1.040	0.536	0.563	1605	1686	5616
18	2.9	0.0474	60	1.103	1.195	0.637	0.659	1907	1973	7227

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	643	707	814	904	1422	1653	610	657	736	802	1656	1944
20	929	1017	1166	1292	2036	2522	946	1016	1132	1231	2417	3035
19	1244	1359	1552	1716	2709	3410	1334	1428	1586	1719	3257	4165
18	1576	1718	1957	2159	3416	4279	1756	1876	2077	2246	4145	5276

### Standard Features

- ASTM A653 SS GR80, with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR80 with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652, UL, and FM Listed
- Tables conform to ANSI/SDI RD-2017

### Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Web Perforated Acoustical Versions

# 3NL-32/3NI-32/3PLN-32 ROOF DECKS

## GRADE 80 STEEL

ASD

### Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	6'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"
22	Single	$W_n / \Omega$	501	223	125	99	80	66	56	41	31	25	20
		L/240	---	193	81	57	42	31	24	15	10	7	5
	Double	$W_n / \Omega$	445	214	124	99	81	67	56	42	32	25	21
		L/240	---	---	---	---	---	---	---	41	27	19	14
	Triple	$W_n / \Omega$	527	260	152	122	100	83	70	52			
		L/240	---	---	---	120	88	66	51	32			
20	Single	$W_n / \Omega$	650	289	162	128	104	86	72	53	41	32	26
		L/240	---	241	102	71	52	39	30	19	13	9	7
	Double	$W_n / \Omega$	633	295	169	134	109	90	76	56	43	34	28
		L/240	---	---	---	---	---	---	---	50	34	24	17
	Triple	$W_n / \Omega$	764	363	209	167	136	112	95	70			
		L/240	---	---	---	149	108	81	63	40			
19	Single	$W_n / \Omega$	802	357	201	158	128	106	89	66	50	40	32
		L/240	---	288	122	85	62	47	36	23	15	11	8
	Double	$W_n / \Omega$	789	363	207	164	133	110	93	68	52	41	34
		L/240	---	---	---	---	---	---	---	60	40	28	21
	Triple	$W_n / \Omega$	961	448	257	204	166	137	116	85			
		L/240	---	---	251	177	129	97	74	47			
18	Single	$W_n / \Omega$	954	424	238	188	153	126	106	78	60	47	38
		L/240	---	335	141	99	72	54	42	26	18	12	9
	Double	$W_n / \Omega$	934	428	243	193	156	129	109	80	61	49	39
		L/240	---	---	---	---	---	---	---	69	46	32	24
	Triple	$W_n / \Omega$	1141	529	302	240	195	161	136	100			
		L/240	---	---	289	203	148	111	86	54			

#### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3N-24/3NI-24 ROOF DECKS GRADE 40 STEEL



ASD

## 24" WIDE 3N ROOF DECKS

- 3N-24 Deck used with Side-lap Screws
- 3NI-24 Deck used with TSWs or BPs

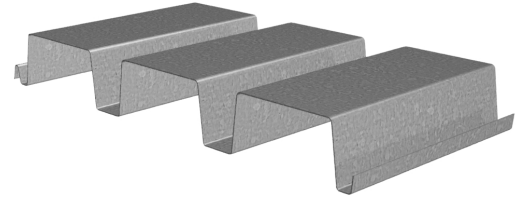

## Nominal Dimensions

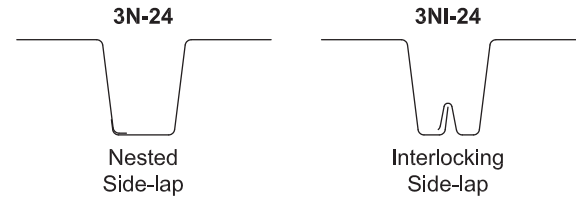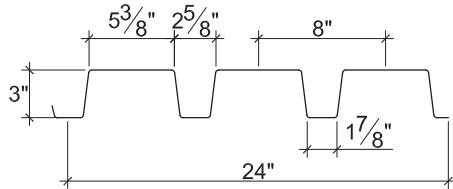

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	2.0	0.0295	40	0.714	0.869	0.368	0.419	735	837	2436
20	2.5	0.0358	40	0.901	1.071	0.482	0.530	962	1058	3589
19	2.9	0.0418	40	1.088	1.252	0.584	0.637	1166	1271	4894
18	3.3	0.0474	40	1.268	1.421	0.674	0.731	1346	1459	5738
16	4.1	0.0598	40	1.682	1.795	0.876	0.934	1749	1864	7204

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	463	509	586	651	1014	1178	444	478	535	584	1189	1395
20	667	731	838	928	1451	1796	686	737	821	893	1733	2176
19	893	976	1115	1232	1930	2430	966	1034	1148	1244	2334	2984
18	1130	1233	1404	1548	2433	3047	1269	1355	1501	1623	2967	3777
16	1745	1895	2147	2359	3726	4624	2086	2219	2442	2630	4609	5816

## Standard Features

- ASTM A653 SS GR40 Min., with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR40 Min. with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652, UL, and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Web Perforated Acoustical Versions

# 3N-24/3NI-24 ROOF DECKS GRADE 40 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	6'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"
22	Single	$W_n / \Omega$	367	163	92	73	59	49	41	30	23	18	15
		L/240	---	---	91	64	47	35	27	17	11	8	6
	Double	$W_n / \Omega$	384	179	102	81	66	55	46	34	26	21	17
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	465	220	127	101	82	68	57	42			
		L/240	---	---	---	---	---	---	---	39			
20	Single	$W_n / \Omega$	481	214	120	95	77	64	53	39	30	24	19
		L/240	---	---	115	81	59	44	34	22	14	10	7
	Double	$W_n / \Omega$	496	228	130	103	84	69	58	43	33	26	21
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	605	282	161	128	104	86	73	54			
		L/240	---	---	---	---	---	---	---	48			
19	Single	$W_n / \Omega$	583	259	146	115	93	77	65	48	36	29	23
		L/240	---	---	139	98	71	54	41	26	17	12	9
	Double	$W_n / \Omega$	605	276	157	124	101	83	70	52	40	31	25
		L/240	---	---	---	---	---	---	---	---	---	---	25
	Triple	$W_n / \Omega$	740	342	195	155	126	104	88	64			
		L/240	---	---	---	---	---	---	---	56			
18	Single	$W_n / \Omega$	673	299	168	133	108	89	75	55	42	33	27
		L/240	---	---	162	114	83	62	48	30	20	14	10
	Double	$W_n / \Omega$	695	317	180	143	116	96	81	59	45	36	29
		L/240	---	---	---	---	---	---	---	---	---	---	28
	Triple	$W_n / \Omega$	852	393	224	178	144	119	101	74			
		L/240	---	---	---	---	---	---	---	64			
16	Single	$W_n / \Omega$	874	389	219	173	140	116	97	71	55	43	35
		L/240	---	---	215	151	110	83	64	40	27	19	14
	Double	$W_n / \Omega$	887	405	230	182	148	122	103	76	58	46	37
		L/240	---	---	---	---	---	---	---	---	---	---	35
	Triple	$W_n / \Omega$	1086	501	286	227	184	153	128	95			
		L/240	---	---	---	---	---	---	---	81			

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2.0DA ACOUSTICAL DOVETAIL ROOF DECK GRADE 40 STEEL



ASD

## 2.0DA ACOUSTICAL DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

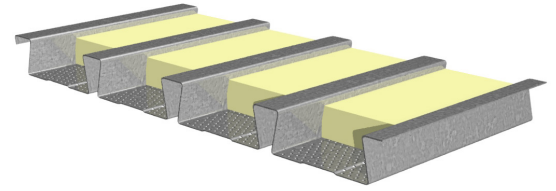

### Nominal Dimensions

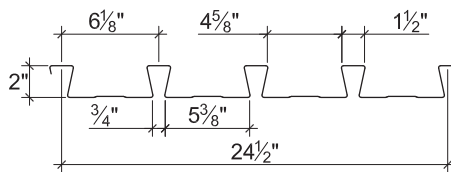

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_o)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	2.0	0.0295	40	0.340	0.310	0.261	0.258	521	515	2896
20	2.4	0.0358	40	0.415	0.385	0.330	0.317	659	633	3498
18	3.2	0.0474	40	0.551	0.528	0.445	0.427	888	852	4584
16	4.0	0.0598	40	0.697	0.684	0.564	0.546	1126	1090	5723

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
22	653	717	826	917	1281	1516	702	757	848	925	1567	1877
20	931	1020	1170	1296	1823	2146	1058	1136	1266	1376	2258	2690
18	1556	1697	1933	2132	3036	3544	1893	2023	2239	2422	3813	4507
16	2378	2582	2926	3215	4629	5360	3043	3237	3563	3837	5866	6880

### Standard Features

- ASTM A653 SS GR 40 Min. with G90
- Standard lengths – 6'-0" to 42'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423 and FM Listed

### Optional Features

- Inquire regarding cost and lead times for:
  - 19 gage
  - Short cuts < 6'-0"
  - Alternative metallic and painted finishes

# 2.0DA ACOUSTICAL DOVETAIL ROOF DECK GRADE 40 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
22	Single	$W_n / \Omega$	260	167	116	85	65	51	42	34	29	25	21
		L/240	---	---	103	65	44	31	22	17	13	10	8
	Double	$W_n / \Omega$	251	162	113	83	64	51	41	34	29	24	21
		L/240	---	---	---	---	---	---	---	---	28	22	18
	Triple	$W_n / \Omega$	311	201	141	104	80	63	51	42	36	30	26
		L/240	---	---	---	---	75	53	38	29	22	17	14
20	Single	$W_n / \Omega$	329	211	146	108	82	65	53	44	37	31	27
		L/240	---	---	126	79	53	37	27	20	16	12	10
	Double	$W_n / \Omega$	309	199	139	102	79	62	50	42	35	30	26
		L/240	---	---	---	---	---	---	---	---	---	28	22
	Triple	$W_n / \Omega$	382	247	173	128	98	78	63	52	44	37	32
		L/240	---	---	---	---	93	65	48	36	28	22	17
18	Single	$W_n / \Omega$	444	284	197	145	111	88	71	59	49	42	36
		L/240	---	---	167	105	71	50	36	27	21	16	13
	Double	$W_n / \Omega$	415	268	187	138	106	84	68	56	47	40	35
		L/240	---	---	---	---	---	---	---	---	---	38	30
	Triple	$W_n / \Omega$	513	333	233	172	132	104	85	70	59	50	43
		L/240	---	---	---	---	128	90	65	49	38	30	24
16	Single	$W_n / \Omega$	563	360	250	184	141	111	90	74	63	53	46
		L/240	---	---	212	133	89	63	46	34	26	21	17
	Double	$W_n / \Omega$	530	343	239	176	135	107	87	72	60	51	44
		L/240	---	---	---	---	---	---	---	---	---	49	39
	Triple	$W_n / \Omega$	655	425	297	220	169	133	108	90	75	64	55
		L/240	---	---	---	---	165	116	85	64	49	39	31

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3.5DA ACOUSTICAL DOVETAIL ROOF DECK GRADE 40 STEEL



ASD

## 3.5DA ACOUSTICAL DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

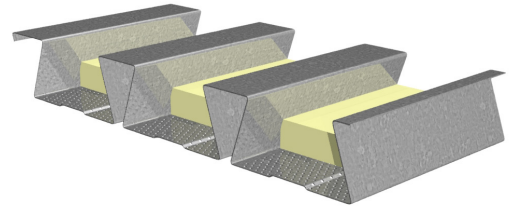

### Nominal Dimensions

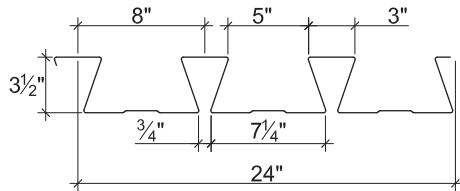

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	3.1	0.0358	40	1.531	1.430	0.655	0.657	1307	1311	3435
18	4.1	0.0474	40	2.098	1.950	0.934	0.928	1864	1852	6012
16	5.1	0.0598	40	2.719	2.533	1.255	1.241	2505	2477	8313

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
20	693	794	880	955	1459	1670	714	796	865	926	1724	1991
18	1168	1330	1467	1588	2422	2753	1310	1450	1568	1672	2927	3360
16	1793	2032	2233	2410	3681	4162	2137	2352	2533	2693	4515	5157

### Standard Features

- ASTM A653 SS GR 40 Min. with G90
- Standard lengths – 6'-0" to 42'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423 and FM Listed

### Optional Features

- Inquire regarding cost and lead times for:
  - 19 gage
  - Short cuts < 6'-0"
  - Alternative metallic and painted finishes

# 3.5DA ACOUSTICAL DOVETAIL ROOF DECK GRADE 40 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"
20	Single	$W_n / \Omega$	86	73	62	53	46	41	36	32	29	26	24
		L/240	75	58	46	37	30	25	20	17	15	13	11
	Double	$W_n / \Omega$	85	72	61	53	46	41	36	32	29	26	24
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	106	89	76	66							
		L/240	---	---	---	65							
18	Single	$W_n / \Omega$	123	104	88	76	66	58	52	46	41	37	34
		L/240	103	80	63	50	41	34	28	24	20	17	15
	Double	$W_n / \Omega$	121	102	87	75	66	58	51	46	41	37	34
		L/240	---	---	---	---	---	---	---	---	---	---	33
	Triple	$W_n / \Omega$	151	127	109	94							
		L/240	---	---	---	88							
16	Single	$W_n / \Omega$	166	139	119	102	89	78	69	62	56	50	45
		L/240	134	103	81	65	53	44	36	31	26	22	19
	Double	$W_n / \Omega$	162	137	117	101	88	77	68	61	55	49	45
		L/240	---	---	---	---	---	---	---	---	---	---	43
	Triple	$W_n / \Omega$	202	170	145	125							
		L/240	---	---	143	114							

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol “---” indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2.0DS-30 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 2.0DS-30 AC DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

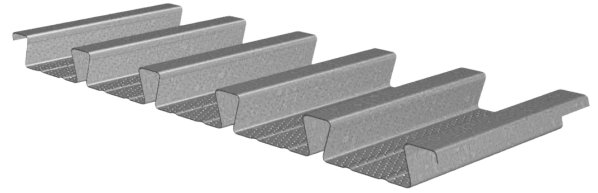

### Nominal Dimensions

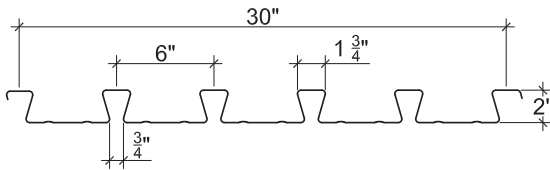

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_o)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	2.1	0.0299	50	0.370	0.331	0.281	0.252	701	629	3334
20	2.5	0.0359	50	0.446	0.417	0.352	0.337	877	841	3978
18	3.4	0.0478	50	0.596	0.600	0.481	0.482	1201	1204	5229
16	4.3	0.0598	50	0.765	0.793	0.617	0.624	1540	1557	6455

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
22	833	916	1054	1171	1557	1794	859	926	1037	1130	1905	2217
20	1166	1278	1465	1622	2186	2503	1272	1366	1523	1655	2706	3130
18	1970	2148	2446	2698	3707	4201	2322	2480	2745	2968	4656	5331
16	2964	3218	3646	4007	5590	6279	3684	3919	4313	4646	7085	8040

### Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423 and FM Listed

### Optional Features

- Inquire regarding cost and lead times for:
  - 21, 19 or 17 gage
  - Alternative metallic and painted finishes

# 2.0DS-30 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
22	Single	$W_n / \Omega$	350	224	156	114	88	69	56	46	39	33	29
		L/240	---	194	112	71	47	33	24	18	14	11	9
	Double	$W_n / \Omega$	306	198	138	102	78	62	50	41	35	30	26
		L/240	---	---	---	---	---	---	---	39	30	24	19
	Triple	$W_n / \Omega$	378	245	172	127	97	77	62	52	43	37	
		L/240	---	---	---	119	80	56	41	31	24	19	
20	Single	$W_n / \Omega$	439	281	195	143	110	87	70	58	49	42	36
		L/240	---	234	135	85	57	40	29	22	17	13	11
	Double	$W_n / \Omega$	407	263	184	136	104	83	67	55	47	40	34
		L/240	---	---	---	---	---	---	66	49	38	30	24
	Triple	$W_n / \Omega$	501	326	229	169	130	103	83	69	58	50	
		L/240	---	---	---	150	101	71	52	39	30	23	
18	Single	$W_n / \Omega$	601	384	267	196	150	119	96	79	67	57	49
		L/240	---	313	181	114	76	54	39	29	23	18	14
	Double	$W_n / \Omega$	578	375	263	194	149	118	96	79	67	57	49
		L/240	---	---	---	---	---	---	95	71	55	43	35
	Triple	$W_n / \Omega$	711	464	326	241	185	147	119	99	83	71	
		L/240	---	---	---	217	145	102	74	56	43	34	
16	Single	$W_n / \Omega$	770	493	342	251	193	152	123	102	86	73	63
		L/240	---	401	232	146	98	69	50	38	29	23	18
	Double	$W_n / \Omega$	745	484	339	250	192	152	124	102	86	73	63
		L/240	---	---	---	---	---	---	---	94	72	57	46
	Triple	$W_n / \Omega$	915	598	420	311	239	190	154	128	107	92	
		L/240	---	---	---	286	192	135	98	74	57	45	

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol “---” indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2.0DF-30 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 2.0DF-30 AC DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

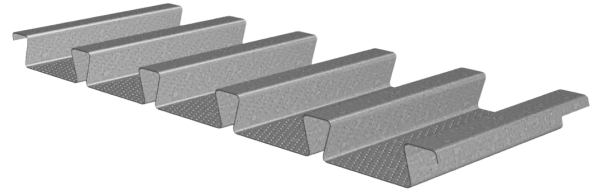

## Nominal Dimensions

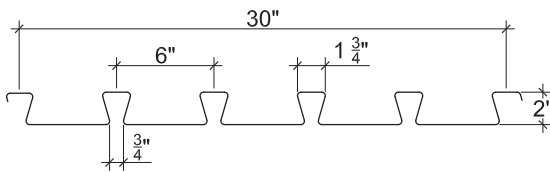

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_o)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	2.5	0.0359	50	0.449	0.431	0.353	0.306	881	763	3978
18	3.4	0.0478	50	0.599	0.600	0.483	0.469	1206	1169	5229
16	4.2	0.0598	50	0.752	0.774	0.608	0.614	1517	1532	6455

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing		Interior Bearing				End Bearing		Interior Bearing			
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
20	1166	1278	1465	1622	2186	2503	1272	1366	1523	1655	2706	3130
18	1970	2148	2446	2698	3707	4201	2322	2480	2745	2968	4656	5331
16	2964	3218	3646	4007	5590	6279	3684	3919	4313	4646	7085	8040

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423 and FM Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 22, 21, 19 or 17 gage
  - Alternative metallic and painted finishes

# 2.0DF-30 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
20	Single	$W_n / \Omega$	440	282	196	144	110	87	70	58	49	42	36
		L/240	---	235	136	86	57	40	29	22	17	13	11
	Double	$W_n / \Omega$	371	240	168	123	95	75	61	50	42	36	31
		L/240	---	---	---	---	---	---	---	---	39	31	25
	Triple	$W_n / \Omega$	459	298	208	154	118	93	76	63	53	45	
		L/240	---	---	---	---	104	73	53	40	31	24	
18	Single	$W_n / \Omega$	603	386	268	197	151	119	96	80	67	57	49
		L/240	---	314	182	114	77	54	39	30	23	18	14
	Double	$W_n / \Omega$	563	365	255	189	145	115	93	77	65	55	48
		L/240	---	---	---	---	---	---	---	71	55	43	35
	Triple	$W_n / \Omega$	693	452	317	234	180	143	116	96	81	69	
		L/240	---	---	---	217	145	102	74	56	43	34	
16	Single	$W_n / \Omega$	759	486	337	248	190	150	121	100	84	72	62
		L/240	---	394	228	144	96	68	49	37	29	22	18
	Double	$W_n / \Omega$	735	477	334	247	189	150	122	101	85	72	62
		L/240	---	---	---	---	---	---	---	92	71	56	45
	Triple	$W_n / \Omega$	902	589	414	306	236	187	152	126	106	90	
		L/240	---	---	---	279	187	131	96	72	55	44	

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3.5DS-24 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 3.5DS-24 AC DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

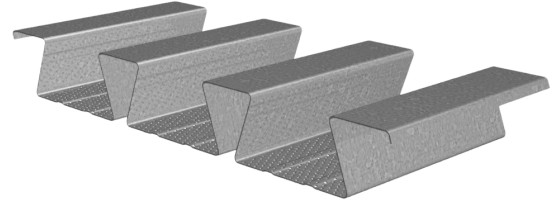

## Nominal Dimensions

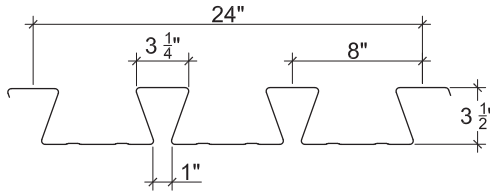

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	3.2	0.0359	50	1.687	1.646	0.674	0.665	1682	1659	3754
18	4.2	0.0478	50	2.313	2.321	0.982	0.999	2450	2492	6813
16	5.3	0.0598	50	2.942	3.040	1.322	1.380	3299	3443	9781

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
20	859	985	1091	1184	1735	1985	850	948	1030	1103	2046	2363
18	1465	1668	1840	1991	2933	3334	1592	1762	1905	2031	3542	4066
16	2217	2512	2760	2979	4415	4992	2565	2823	3040	3232	5411	6179

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423 and FM Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 19 or 17 gage
  - Alternative metallic and painted finishes

# 3.5DS-24 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"
20	Single	$W_n / \Omega$	111	93	80	69	60	53	47	42	37	34	31
		L/240	83	64	50	40	33	27	23	19	16	14	12
	Double	$W_n / \Omega$	108	91	77	67	58	51	46	41	37	33	
		L/240	---	---	---	---	---	---	---	---	---	32	
	Triple	$W_n / \Omega$	133	113	96								
		L/240	---	---	93								
18	Single	$W_n / \Omega$	162	136	116	100	87	77	68	60	54	49	44
		L/240	114	88	69	55	45	37	31	26	22	19	16
	Double	$W_n / \Omega$	163	137	117	101	88	77	69	61	55	50	
		L/240	---	---	---	---	---	---	---	---	53	46	
	Triple	$W_n / \Omega$	202	170	145								
		L/240	---	166	131								
16	Single	$W_n / \Omega$	218	183	156	135	117	103	91	81	73	66	60
		L/240	145	112	88	70	57	47	39	33	28	24	21
	Double	$W_n / \Omega$	225	189	162	139	122	107	95	85	76	69	
		L/240	---	---	---	---	---	---	---	82	70	60	
	Triple	$W_n / \Omega$	279	235	201								
		L/240	---	218	171								

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3.5DF-24 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL



ASD

## 3.5DF-24 AC DOVETAIL ROOF DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- FM Listed

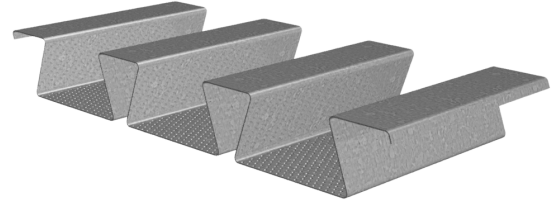

## Nominal Dimensions

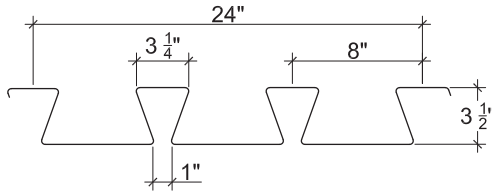

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
18	4.2	0.0478	50	2.318	2.268	0.984	0.834	2456	2081	6813
16	5.3	0.0598	50	2.948	2.947	1.325	1.144	3307	2855	9781

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
18	1465	1668	1840	1991	2933	3334	1592	1762	1905	2031	3542	4066
16	2217	2512	2760	2979	4415	4992	2565	2823	3040	3232	5411	6179

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI RD-2017
- IAPMO UES ER-423 and FM Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 17 gage
  - Alternative metallic and painted finishes

# 3.5DF-24 AC ACOUSTICAL DOVETAIL ROOF DECK GRADE 50 STEEL

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"
18	Single	$W_n / \Omega$	162	136	116	100	87	77	68	61	54	49	45
		L/240	114	88	69	55	45	37	31	26	22	19	16
	Double	$W_n / \Omega$	136	115	98	84	74	65	57	51	46	42	
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	170	143	122								
		L/240	---	---	---								
16	Single	$W_n / \Omega$	219	184	157	135	118	103	92	82	73	66	60
		L/240	145	112	88	70	57	47	39	33	28	24	21
	Double	$W_n / \Omega$	187	157	134	116	101	89	79	70	63	57	
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	233	196	167								
		L/240	---	---	166								

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol “---” indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.5BA-36/1.5BIA-36/1.5PLBA-36 ACOUSTICAL ROOF DECKS GRADE 50 STEEL



ASD

## 1.5B ACOUSTICAL ROOF DECKS

- 1.5BA-36 Deck used with Side-lap Screws
- 1.5BIA-36 Deck used with TSWs or BPs
- 1.5PLBA-36 Deck used with PunchLok® II System

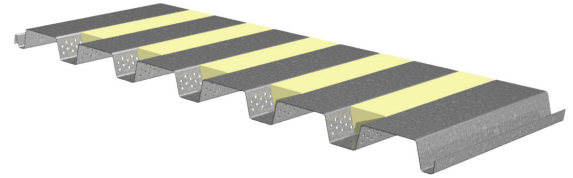

## Nominal Dimensions

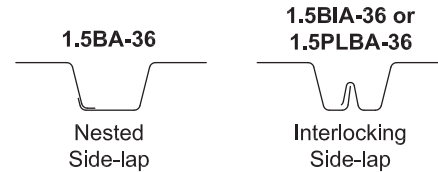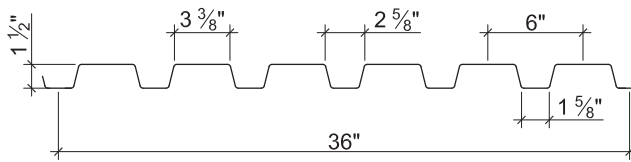

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.5	0.0295	50	0.148	0.169	0.161	0.170	402	424	2008
20	1.9	0.0358	50	0.187	0.206	0.213	0.218	532	544	2421
19	2.2	0.0418	50	0.227	0.244	0.253	0.264	631	659	2809
18	2.5	0.0474	50	0.263	0.276	0.290	0.302	723	753	3166
16	3.2	0.0598	50	0.346	0.348	0.374	0.382	933	953	3941

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
22	783	861	991	1082	1476	1595	798	859	963	1035	1792	1949
20	1122	1230	1410	1532	2120	2281	1214	1304	1453	1556	2608	2823
19	1495	1634	1867	2022	2829	3033	1691	1810	2011	2144	3512	3787
18	1887	2058	2344	2530	3575	3819	2207	2357	2609	2773	4466	4799
16	2899	3148	3567	3822	5501	5838	3585	3814	4198	4432	6941	7407

## Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR50 Min. with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes

# 1.5BA-36/1.5BIA-36/1.5PLBA-36 ACOUSTICAL ROOF DECKS GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			2'-0"	3'-0"	4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
22	Single	$W_n / \Omega$	804	357	201	129	89	66	50	40	32	27	22
		L/240	---	---	152	78	45	28	19	13	10	7	6
	Double	$W_n / \Omega$	750	355	205	133	93	68	53	42	34	28	23
		L/240	---	---	---	---	---	---	52	37	27	20	15
	Triple	$W_n / \Omega$	895	434	253	164	115	85	65	52	42	35	29
		L/240	---	---	---	---	97	61	41	29	21	16	12
20	Single	$W_n / \Omega$	1063	473	266	170	118	87	66	53	43	35	30
		L/240	---	454	192	98	57	36	24	17	12	9	7
	Double	$W_n / \Omega$	948	453	262	170	119	88	67	53	43	36	30
		L/240	---	---	---	---	---	---	64	45	33	24	19
	Triple	$W_n / \Omega$	1127	551	322	210	147	109	84	66	54	45	38
		L/240	---	---	---	204	118	74	50	35	25	19	15
19	Single	$W_n / \Omega$	1262	561	316	202	140	103	79	62	50	42	35
		L/240	---	551	233	119	69	43	29	20	15	11	9
	Double	$W_n / \Omega$	1136	545	316	205	144	106	81	65	52	43	36
		L/240	---	---	---	---	---	---	75	53	39	29	22
	Triple	$W_n / \Omega$	1347	663	388	254	178	132	101	80	65	54	45
		L/240	---	---	---	242	140	88	59	41	30	23	17
18	Single	$W_n / \Omega$	1447	643	362	231	161	118	90	71	58	48	40
		L/240	---	639	269	138	80	50	34	24	17	13	10
	Double	$W_n / \Omega$	1295	622	361	235	164	121	93	74	60	50	42
		L/240	---	---	---	---	---	---	85	60	44	33	25
	Triple	$W_n / \Omega$	1533	756	443	290	204	151	116	92	75	62	52
		L/240	---	---	---	273	158	100	67	47	34	26	20
16	Single	$W_n / \Omega$	1866	829	466	299	207	152	117	92	75	62	52
		L/240	---	---	354	181	105	66	44	31	23	17	13
	Double	$W_n / \Omega$	1631	786	456	297	208	153	118	93	76	63	53
		L/240	---	---	---	---	---	---	107	75	55	41	32
	Triple	$W_n / \Omega$	1929	954	560	366	257	190	147	116	94	78	66
		L/240	---	---	---	345	199	126	84	59	43	32	25

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.5BA-36/1.5BIA-36/1.5PLBA-36 ACOUSTICAL ROOF DECKS GRADE 80 STEEL



ASD

## 1.5B ACOUSTICAL ROOF DECKS

- 1.5BA-36 Deck used with Side-lap Screws
- 1.5BIA-36 Deck used with TSWs or BPs
- 1.5PLBA-36 Deck used with PunchLok® II System

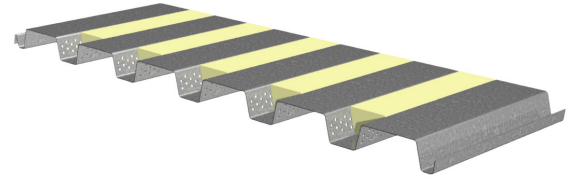

## Nominal Dimensions

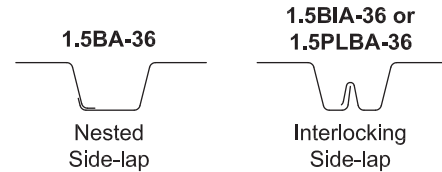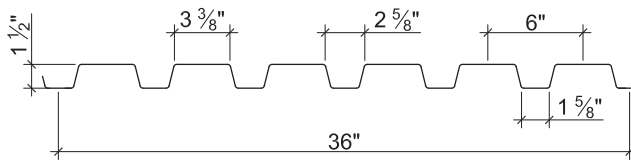

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.5	0.0295	60	0.144	0.166	0.154	0.164	461	491	2409
20	1.9	0.0358	60	0.183	0.206	0.204	0.212	611	635	2904
19	2.2	0.0418	60	0.221	0.241	0.250	0.257	749	769	3370
18	2.5	0.0474	60	0.259	0.276	0.287	0.299	859	895	3799

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
22	940	1033	1190	1299	1771	1915	957	1031	1155	1242	2151	2338
20	1347	1475	1691	1839	2543	2737	1457	1564	1744	1867	3130	3388
19	1794	1961	2240	2426	3395	3639	2029	2173	2413	2573	4215	4544
18	2265	2470	2813	3036	4289	4583	2648	2828	3131	3327	5360	5758

## Standard Features

- ASTM A653 SS GR80, with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR80 with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes

# 1.5BA-36/1.5BIA-36/1.5PLBA-36 ACOUSTICAL ROOF DECKS GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			2'-0"	3'-0"	4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
22	Single	$W_n / \Omega$	922	410	231	148	102	75	58	46	37	30	26
		L/240	-	350	148	76	44	28	18	13	9	7	5
	Double	$W_n / \Omega$	875	413	238	154	108	79	61	48	39	32	27
		L/240	---	---	---	---	---	76	51	36	26	20	15
	Triple	$W_n / \Omega$	1047	505	293	191	134	99	76	60	49	40	34
		L/240	---	---	---	164	95	60	40	28	21	15	12
20	Single	$W_n / \Omega$	1222	543	305	195	136	100	76	60	49	40	34
		L/240	---	444	187	96	56	35	23	16	12	9	7
	Double	$W_n / \Omega$	1114	530	306	198	139	102	79	62	50	42	35
		L/240	---	---	---	---	---	95	64	45	33	24	19
	Triple	$W_n / \Omega$	1327	646	377	246	172	127	98	78	63	52	44
		L/240	---	---	---	204	118	74	50	35	25	19	15
19	Single	$W_n / \Omega$	1497	665	374	240	166	122	94	74	60	49	42
		L/240	---	537	226	116	67	42	28	20	14	11	8
	Double	$W_n / \Omega$	1337	639	370	240	168	124	95	75	61	51	43
		L/240	---	---	---	---	---	111	74	52	38	29	22
	Triple	$W_n / \Omega$	1587	778	455	297	208	154	119	94	76	63	53
		L/240	---	---	---	239	138	87	58	41	30	22	17
18	Single	$W_n / \Omega$	1719	764	430	275	191	140	107	85	69	57	48
		L/240	---	629	265	136	79	50	33	23	17	13	10
	Double	$W_n / \Omega$	1543	741	429	279	195	144	111	88	71	59	49
		L/240	---	---	---	---	---	127	85	60	44	33	25
	Triple	$W_n / \Omega$	1827	900	528	345	242	179	138	109	89	73	62
		L/240	---	---	---	273	158	100	67	47	34	26	20

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NLA-32/3NIA-32/3PLNA-32 ACOUSTICAL ROOF DECKS GRADE 50 STEEL



ASD

## 32" WIDE 3N ACOUSTICAL ROOF DECKS

- 3NLA-32 Deck used with Side-lap Screws
- 3NIA-32 Deck used with TSWs or BPs
- 3PLNA-32 Deck used with PunchLok® II System

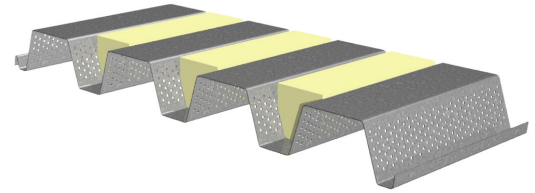

## Nominal Dimensions

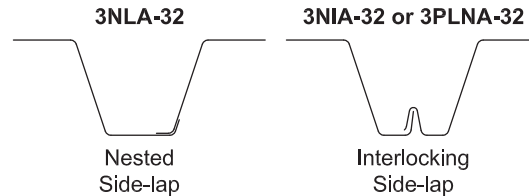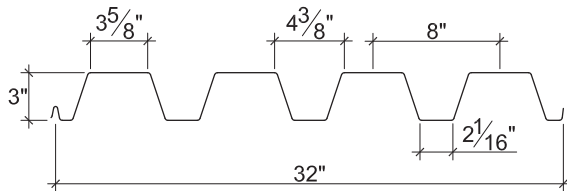

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.7	0.0295	50	0.611	0.680	0.328	0.353	819	881	1632
20	2.1	0.0358	50	0.766	0.842	0.426	0.452	1063	1128	2821
19	2.4	0.0418	50	0.917	1.000	0.526	0.550	1313	1372	3845
18	2.8	0.0474	50	1.067	1.140	0.627	0.641	1565	1599	4948
16	3.5	0.0598	50	1.405	1.448	0.826	0.841	2061	2098	6798

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	510	561	645	717	1178	1369	459	495	554	604	1331	1561
20	741	812	931	1031	1688	2090	724	777	866	942	1950	2448
19	997	1089	1244	1375	2246	2827	1031	1103	1225	1328	2635	3370
18	1267	1381	1573	1735	2833	3549	1366	1459	1616	1747	3361	4277
16	1968	2138	2422	2661	4346	5394	2277	2422	2666	2871	5247	6620

## Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR50 Min. with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes

# 3NLA-32/3NIA-32/3PLNA-32 ACOUSTICAL ROOF DECKS GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	6'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"
22	Single	$W_n / \Omega$	409	182	102	81	65	54	45	33	26	20	16
		L/240	---	---	78	55	40	30	23	15	10	7	5
	Double	$W_n / \Omega$	365	179	104	83	68	57	48	35	27	22	17
		L/240	---	---	---	---	---	---	---	---	26	18	13
	Triple	$W_n / \Omega$	428	215	128	102	84	70	59	44			
		L/240	---	---	---	---	---	63	49	31			
20	Single	$W_n / \Omega$	531	236	133	105	85	70	59	43	33	26	21
		L/240	---	232	98	69	50	38	29	18	12	9	6
	Double	$W_n / \Omega$	504	238	137	109	88	73	62	46	35	28	22
		L/240	---	---	---	---	---	---	---	---	32	23	17
	Triple	$W_n / \Omega$	604	291	169	135	110	91	77	57			
		L/240	---	---	---	---	104	78	60	38			
19	Single	$W_n / \Omega$	656	292	164	130	105	87	73	54	41	32	26
		L/240	---	278	117	82	60	45	35	22	15	10	8
	Double	$W_n / \Omega$	627	292	167	133	108	90	75	56	43	34	27
		L/240	---	---	---	---	---	---	---	---	39	27	20
	Triple	$W_n / \Omega$	756	359	207	165	134	111	94	69			
		L/240	---	---	---	---	124	93	72	45			
18	Single	$W_n / \Omega$	782	348	196	155	125	103	87	64	49	39	31
		L/240	---	324	137	96	70	53	40	25	17	12	9
	Double	$W_n / \Omega$	741	343	196	155	126	105	88	65	50	39	32
		L/240	---	---	---	---	---	---	---	---	44	31	23
	Triple	$W_n / \Omega$	899	423	243	193	157	130	110	81			
		L/240	---	---	---	---	141	106	82	51			
16	Single	$W_n / \Omega$	1031	458	258	204	165	136	115	84	64	51	41
		L/240	---	426	180	126	92	69	53	34	22	16	12
	Double	$W_n / \Omega$	979	452	258	204	166	137	116	85	65	52	42
		L/240	---	---	---	---	---	---	---	83	56	39	29
	Triple	$W_n / \Omega$	1190	557	319	254	206	171	144	106			
		L/240	---	---	---	246	179	135	104	65			

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NLA-32/3NIA-32/3PLNA-32 ACOUSTICAL ROOF DECKS GRADE 80 STEEL


ASD

## 32" WIDE 3N ACOUSTICAL ROOF DECKS

- 3NLA-32 Deck used with Side-lap Screws
- 3NIA-32 Deck used with TSWs or BPs
- 3PLNA-32 Deck used with PunchLok® II System

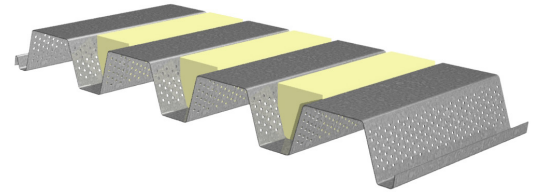

## Nominal Dimensions

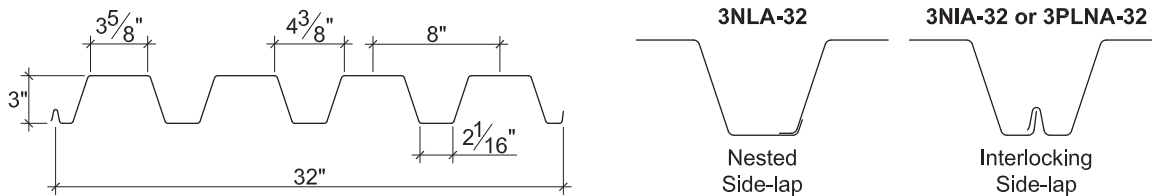

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.7	0.0295	60	0.604	0.672	0.318	0.329	952	985	1632
20	2.1	0.0358	60	0.754	0.832	0.412	0.440	1234	1317	2924
19	2.4	0.0418	60	0.903	0.989	0.509	0.535	1524	1602	4213
18	2.8	0.0474	60	1.048	1.136	0.605	0.626	1811	1874	5420

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	612	673	775	860	1413	1643	551	594	665	725	1597	1874
20	889	974	1117	1237	2025	2508	868	932	1040	1130	2340	2938
19	1196	1307	1493	1650	2696	3393	1237	1324	1470	1594	3162	4043
18	1520	1657	1888	2082	3400	4258	1640	1751	1939	2097	4033	5133

## Standard Features

- ASTM A653 SS GR80, with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR80 with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes

# 3NLA-32/3NIA-32/3PLNA-32 ACOUSTICAL ROOF DECKS GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	6'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"
22	Single	$W_n / \Omega$	476	212	119	94	76	63	53	39	30	24	19
		L/240	---	183	77	54	40	30	23	14	10	7	5
	Double	$W_n / \Omega$	393	196	115	92	75	63	53	39	30	24	19
		L/240	---	---	---	---	---	---	---	39	26	18	13
	Triple	$W_n / \Omega$	456	234	140	113	93	77	65	49			
		L/240	---	---	---	---	83	62	48	30			
20	Single	$W_n / \Omega$	617	274	154	122	99	82	69	50	39	30	25
		L/240	---	229	97	68	49	37	29	18	12	8	6
	Double	$W_n / \Omega$	574	274	159	126	103	85	72	53	41	32	26
		L/240	---	---	---	---	---	---	---	48	32	23	16
	Triple	$W_n / \Omega$	682	334	195	156	127	106	89	66			
		L/240	---	---	---	141	103	77	60	38			
19	Single	$W_n / \Omega$	762	339	190	151	122	101	85	62	48	38	30
		L/240	---	274	116	81	59	44	34	22	14	10	7
	Double	$W_n / \Omega$	723	339	195	155	126	104	88	65	50	39	32
		L/240	---	---	---	---	---	---	---	57	38	27	20
	Triple	$W_n / \Omega$	870	416	241	192	156	130	109	81			
		L/240	---	---	239	168	122	92	71	45			
18	Single	$W_n / \Omega$	906	403	226	179	145	120	101	74	57	45	36
		L/240	---	318	134	94	69	52	40	25	17	12	9
	Double	$W_n / \Omega$	860	400	229	182	148	122	103	76	58	46	37
		L/240	---	---	---	---	---	---	---	65	44	31	22
	Triple	$W_n / \Omega$	1040	492	283	225	184	152	128	95			
		L/240	---	---	275	193	141	106	81	51			

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NA-24/3NIA-24 ACOUSTICAL ROOF DECKS GRADE 40 STEEL



ASD

## 24" WIDE 3N ACOUSTICAL ROOF DECKS

- 3NA-24 Deck used with Side-lap Screws
- 3NIA-24 Deck used with TSWs or BPs

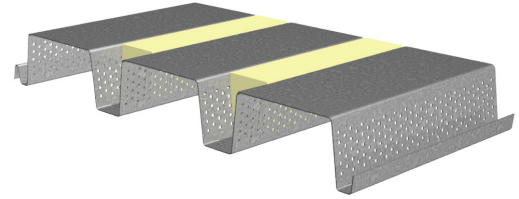

## Nominal Dimensions

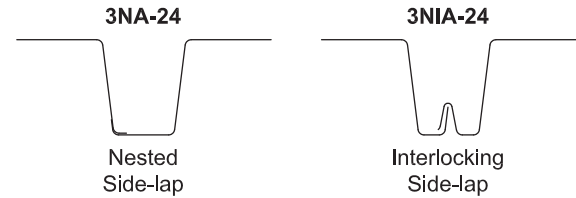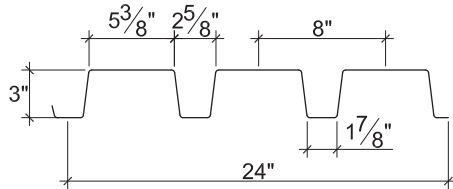

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.9	0.0295	40	0.679	0.826	0.349	0.398	696	795	1816
20	2.4	0.0358	40	0.856	1.017	0.458	0.503	914	1004	2673
19	2.8	0.0418	40	1.033	1.189	0.555	0.605	1108	1208	3641
18	3.1	0.0474	40	1.204	1.350	0.640	0.695	1277	1387	4266
16	3.9	0.0598	40	1.598	1.705	0.832	0.887	1660	1771	5346

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	440	483	556	618	1007	1171	400	431	483	526	1144	1343
20	638	699	801	887	1442	1786	628	674	752	817	1675	2103
19	857	937	1070	1183	1920	2417	893	956	1061	1150	2263	2893
18	1088	1187	1352	1491	2421	3032	1181	1262	1397	1511	2883	3670
16	1688	1834	2077	2283	3710	4603	1963	2088	2298	2475	4494	5671

## Standard Features

- ASTM A653 SS GR40 Min., with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR40 Min. with gray primer
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes

# 3NA-24/3NIA-24 ACOUSTICAL ROOF DECKS GRADE 40 STEEL

ASD


## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	6'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"
22	Single	$W_n / \Omega$	348	155	87	69	56	46	39	28	22	17	14
		L/240	---	---	87	61	45	33	26	16	11	8	6
	Double	$W_n / \Omega$	349	166	96	76	62	52	43	32	25	19	16
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	415	202	118	94	77	64	54	40			
		L/240	---	---	---	---	---	---	---	37			
20	Single	$W_n / \Omega$	457	203	114	90	73	60	51	37	29	23	18
		L/240	---	---	110	77	56	42	32	20	14	10	7
	Double	$W_n / \Omega$	454	213	122	97	79	65	55	41	31	25	20
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	547	261	151	120	98	81	69	51			
		L/240	---	---	---	---	---	---	---	46			
19	Single	$W_n / \Omega$	554	246	138	109	89	73	62	45	35	27	22
		L/240	---	---	132	93	68	51	39	25	17	12	8
	Double	$W_n / \Omega$	558	259	148	117	95	79	66	49	38	30	24
		L/240	---	---	---	---	---	---	---	---	---	---	23
	Triple	$W_n / \Omega$	676	318	183	146	118	98	83	61			
		L/240	---	---	---	---	---	---	---	54			
18	Single	$W_n / \Omega$	639	284	160	126	102	84	71	52	40	32	26
		L/240	---	---	154	108	79	59	46	29	19	14	10
	Double	$W_n / \Omega$	643	298	170	135	110	91	76	56	43	34	28
		L/240	---	---	---	---	---	---	---	---	---	---	27
	Triple	$W_n / \Omega$	779	366	211	167	136	113	95	70			
		L/240	---	---	---	---	---	---	---	61			
16	Single	$W_n / \Omega$	830	369	208	164	133	110	92	68	52	41	33
		L/240	---	---	205	144	105	79	61	38	26	18	13
	Double	$W_n / \Omega$	818	379	217	172	140	116	97	72	55	44	35
		L/240	---	---	---	---	---	---	---	---	---	---	34
	Triple	$W_n / \Omega$	991	467	269	213	174	144	121	89			
		L/240	---	---	---	---	---	---	---	77			


### Notes:


1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "----" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

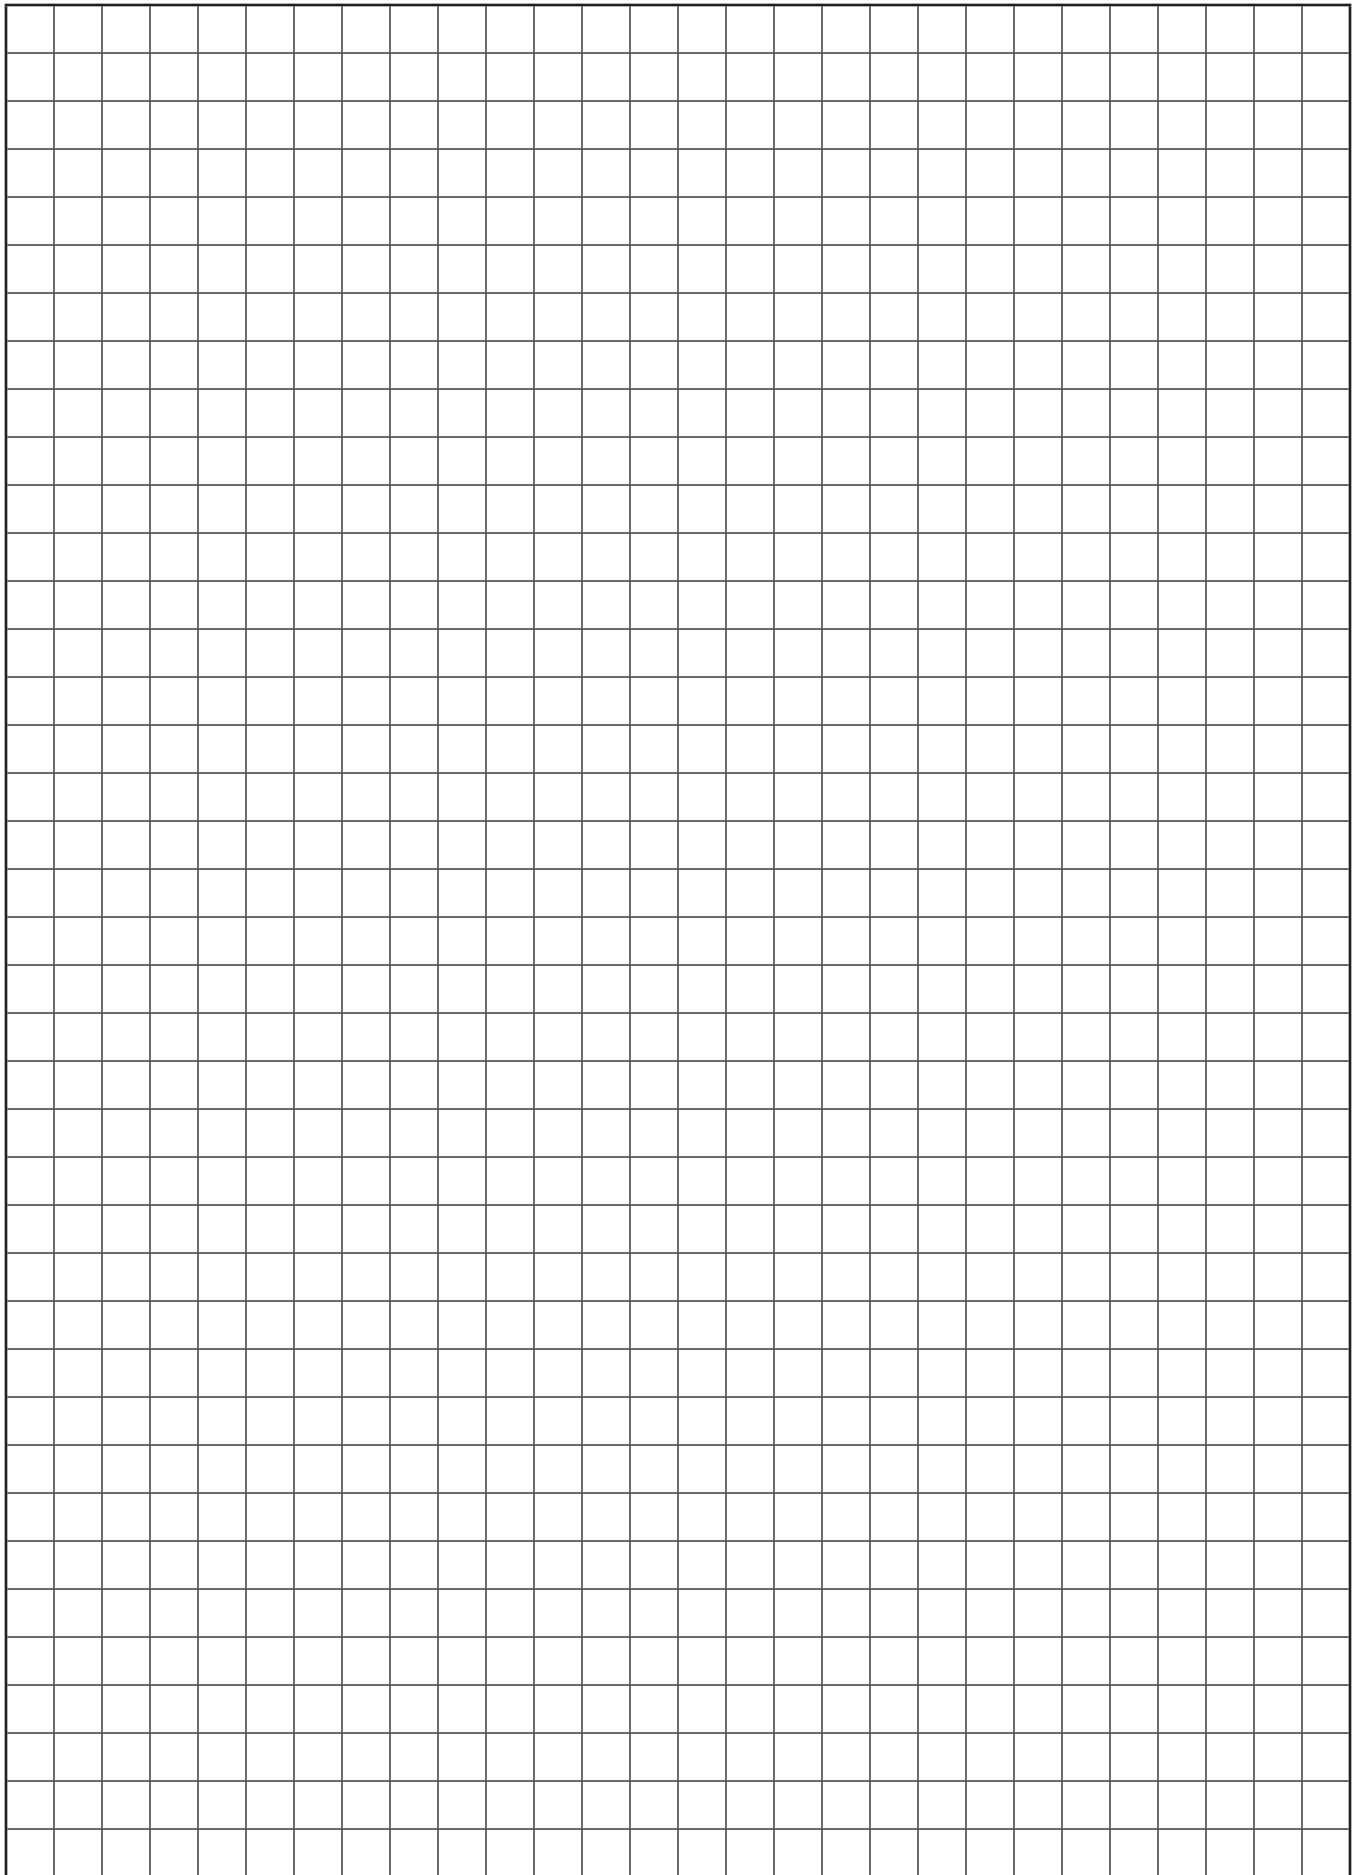

# COMPOSITE DECK

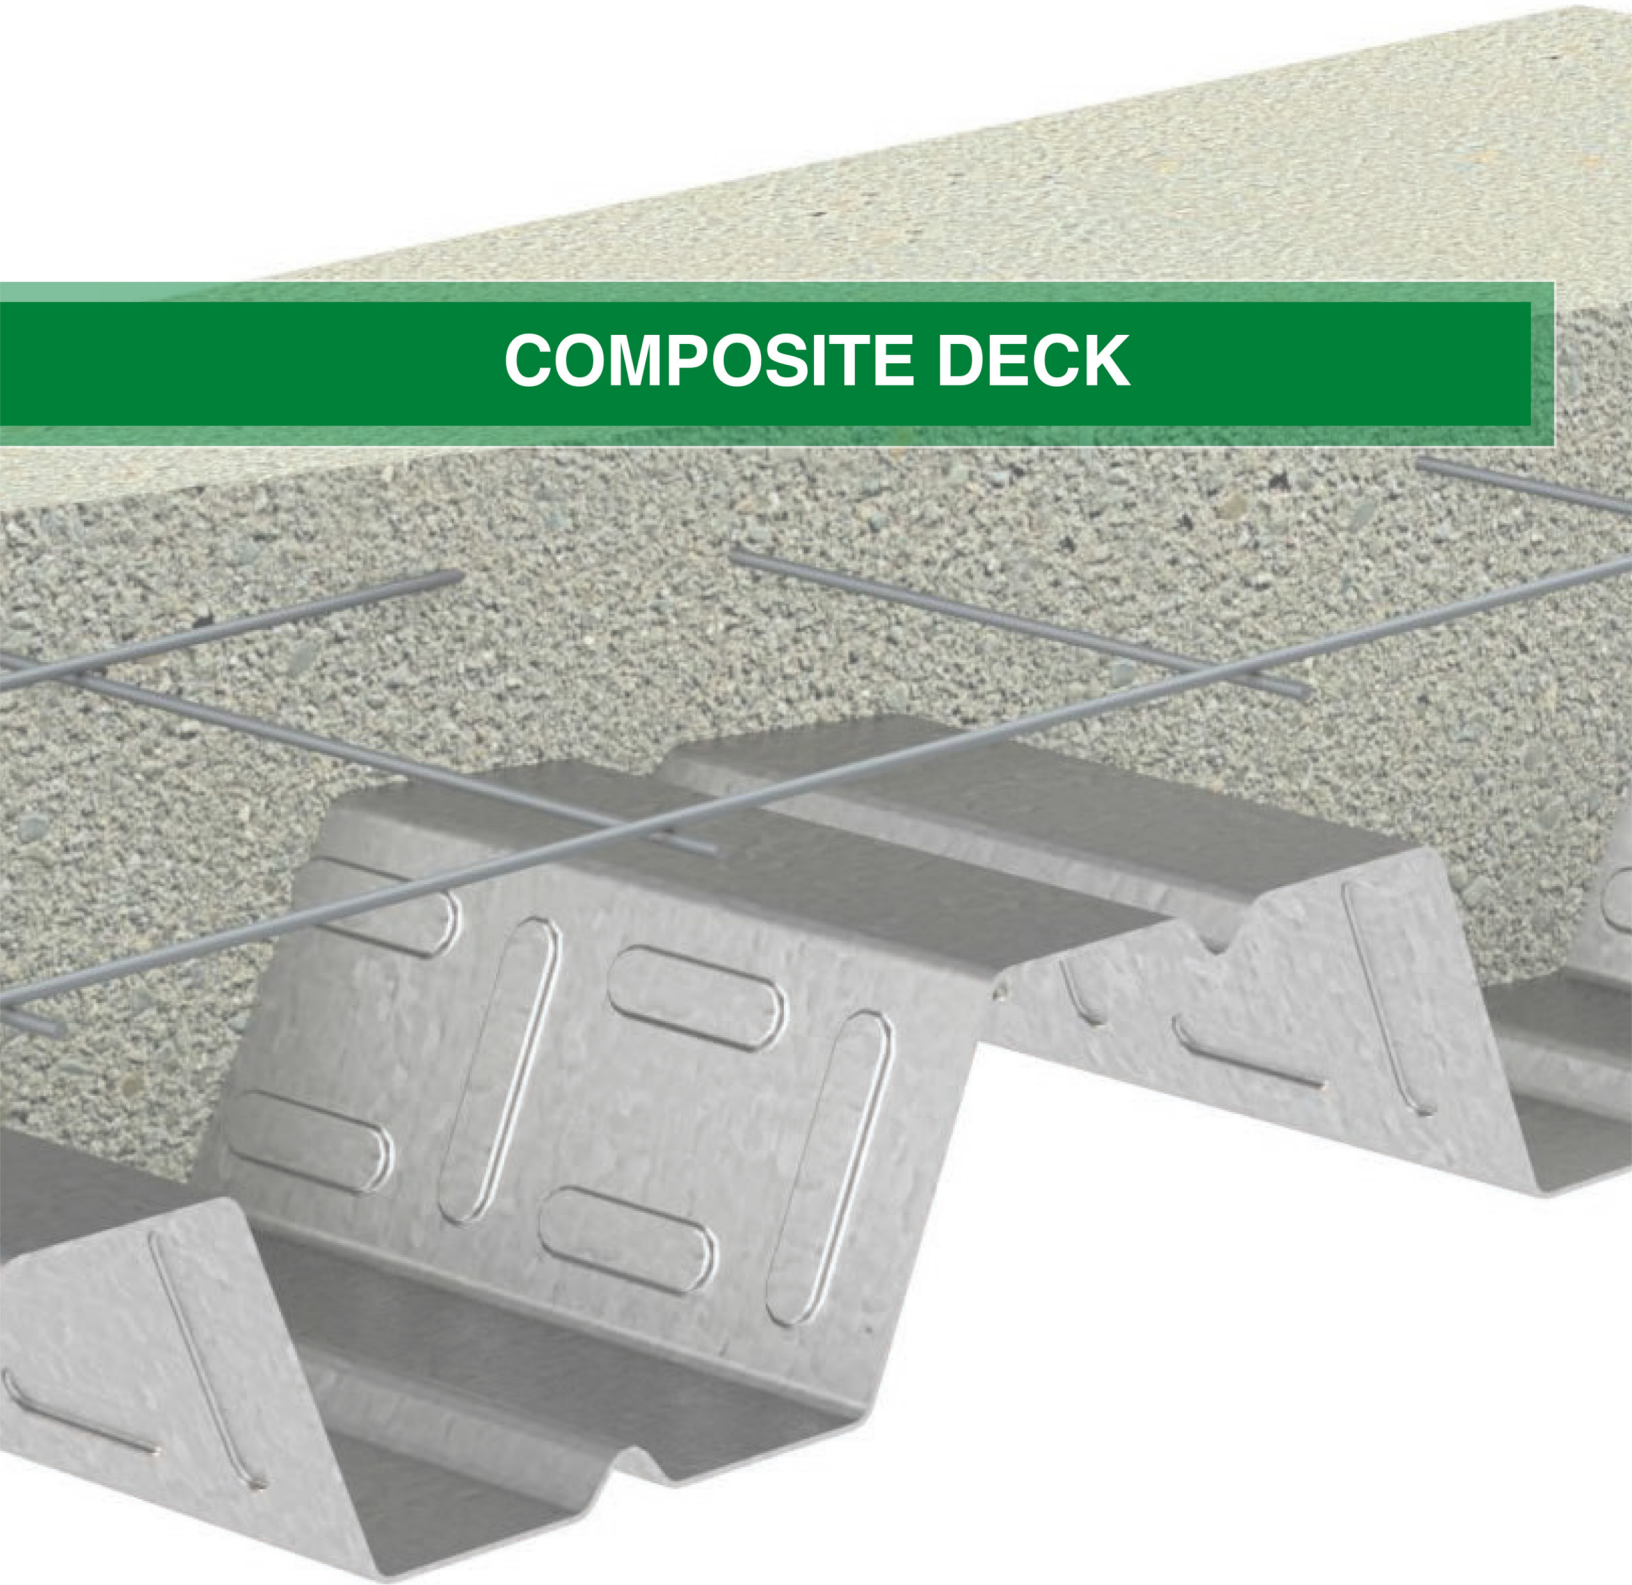


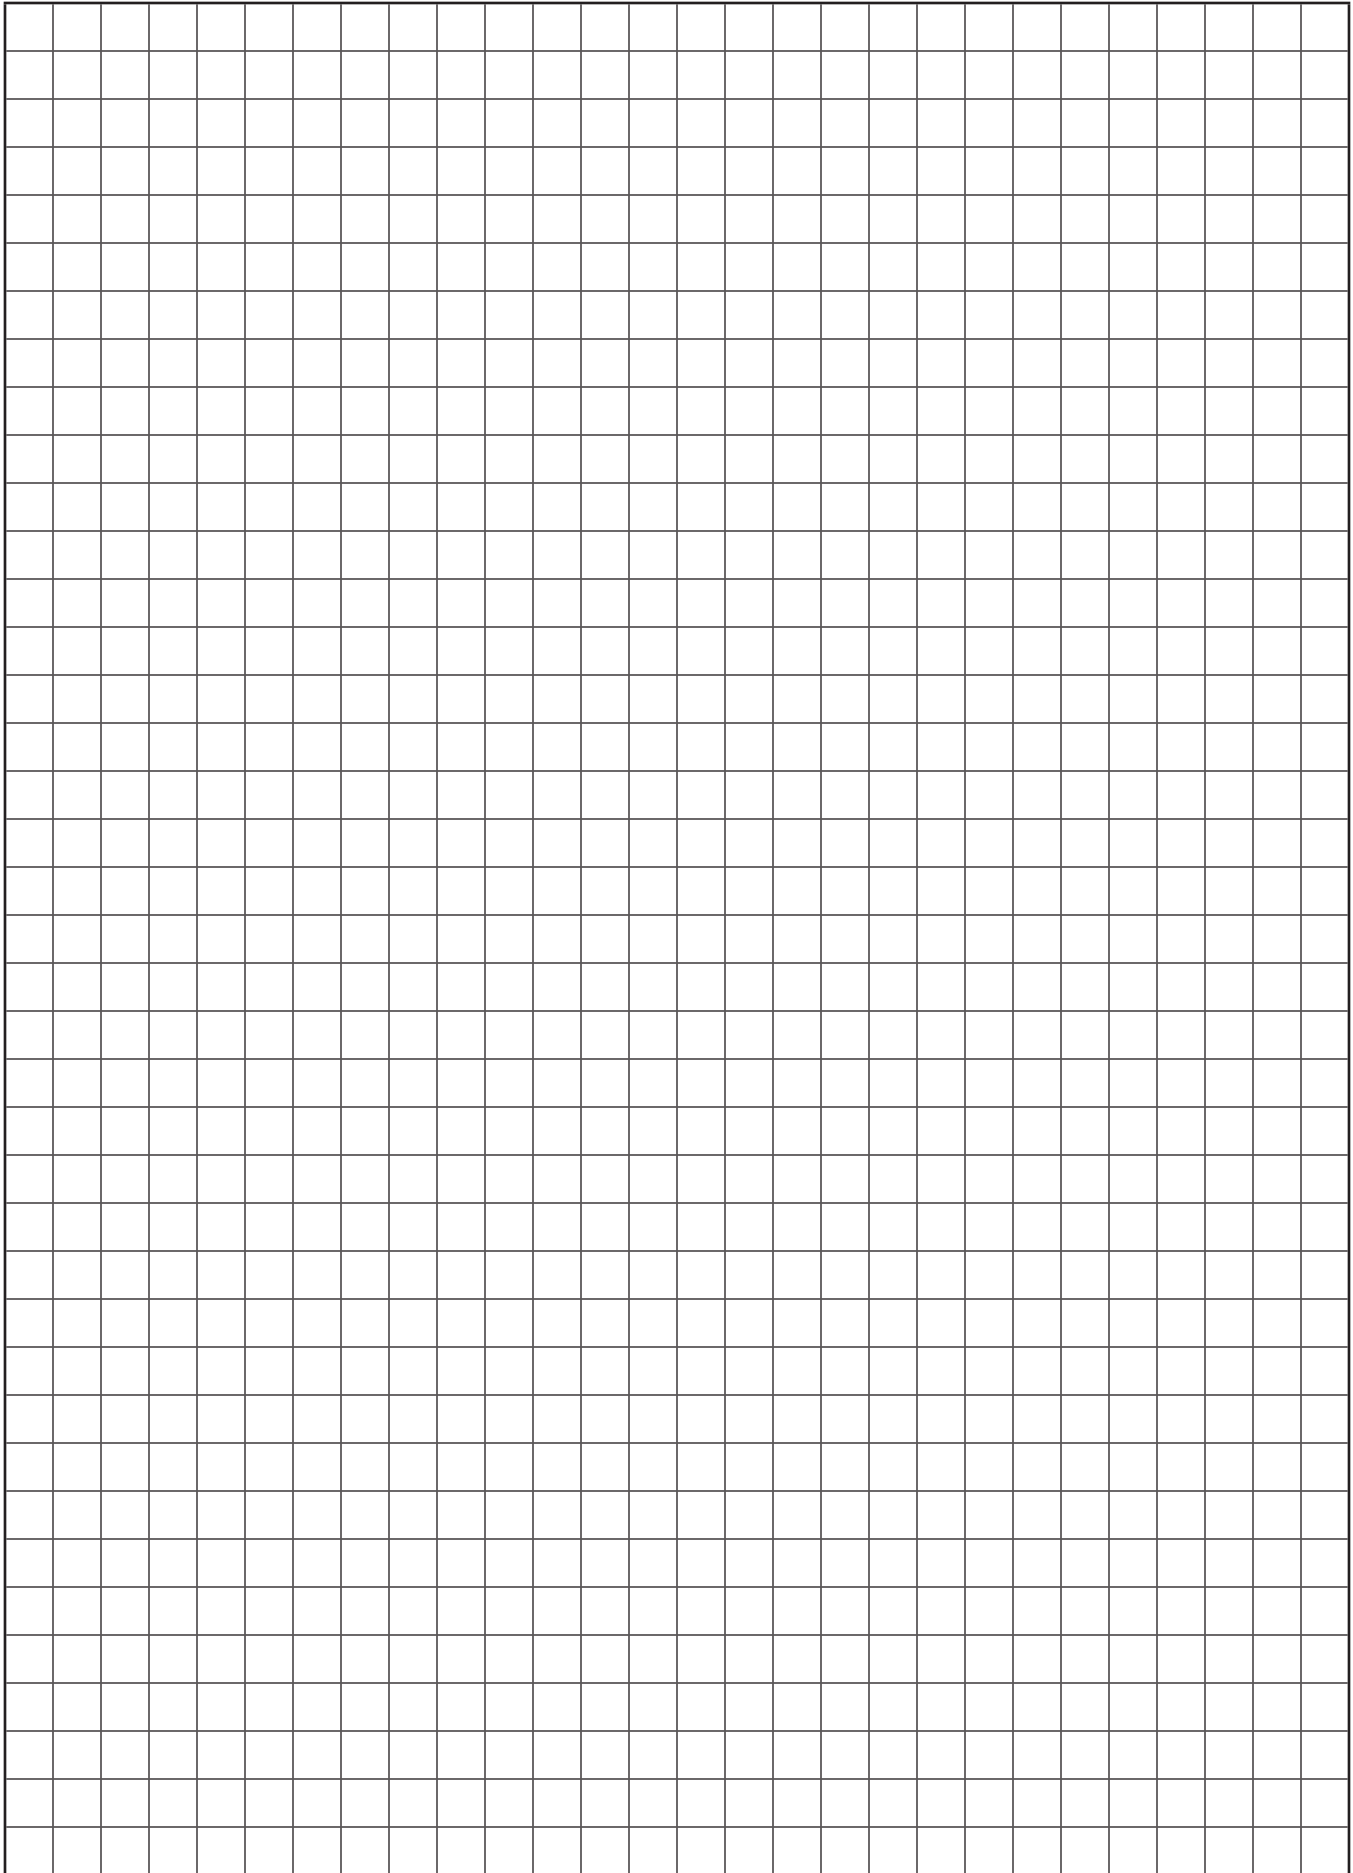



# 2.0D DOVETAIL DECK

## 2.0D DOVETAIL DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- UL Listed

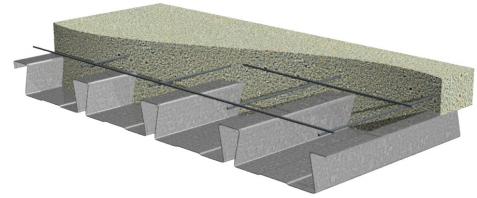

## Nominal Dimensions

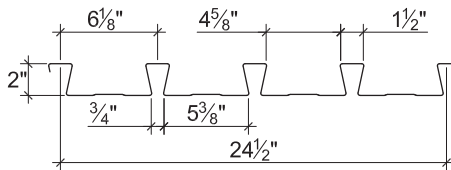

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	2.1	0.0295	40	0.387	0.359	0.272	0.272	543	543	2896
20	2.6	0.0358	40	0.472	0.447	0.343	0.334	684	666	3498
18	3.4	0.0474	40	0.626	0.612	0.463	0.450	924	898	4584
16	4.3	0.0598	40	0.792	0.791	0.587	0.576	1172	1150	5723

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
22	653	717	826	917	1281	1516	702	757	848	925	1567	1877
20	931	1020	1170	1296	1823	2146	1058	1136	1266	1376	2258	2690
18	1556	1697	1933	2132	3036	3544	1893	2023	2239	2422	3813	4507
16	2378	2582	2926	3215	4629	5360	3043	3237	3563	3837	5866	6880

## Standard Features

- ASTM A653 SS GR 40 Min. with G90
- Standard lengths – 6'-0" to 42'-0"
- Tables conform to ANSI/SDI C-2017
- IAPMO UES ER-423 and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 19 gage
  - Short cuts < 6'-0"
  - Alternative metallic and painted finishes

# 2.0D DOVETAIL DECK-SLAB NORMAL WEIGHT CONCRETE (145 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
4"	2"	22	6'-10"	7'-11"	8'-1"	46.0	5.75	3.44	3.97
		20	7'-11"	8'-9"	9'-0"	46.5	6.16	4.09	3.97
		18	9'-6"	10'-1"	10'-5"	47.3	6.85	5.22	3.97
		16	10'-11"	11'-4"	11'-9"	48.2	7.50	6.38	3.97
5¼"	¾"	22	6'-3"	7'-2"	7'-4"	61.1	12.19	4.44	5.21
		20	7'-2"	7'-11"	8'-2"	61.6	13.03	5.29	5.21
		18	8'-7"	9'-2"	9'-5"	62.4	14.42	6.79	5.21
		16	9'-10"	10'-4"	10'-8"	63.3	15.75	8.32	5.21
5½"	¾"	22	6'-1"	7'-0"	7'-2"	64.1	13.87	4.64	5.38
		20	7'-1"	7'-9"	8'-0"	64.6	14.81	5.53	5.46
		18	8'-5"	9'-0"	9'-3"	65.4	16.39	7.11	5.46
		16	9'-8"	10'-1"	10'-6"	66.3	17.90	8.73	5.46

**Note:**

- Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

Total Slab Depth		Deck Gage	Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)								NWC (145 pcf), $f'_c = 3000$ psi
			Span (ft.-in.)								
			10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	18'-0"	20'-0"
4"	22	229	181	145	114	91	74	61	39	22	
	20	269	202	155	122	98	79	65	46	33	
	18	299	224	173	136	109	88	73	51	37	
	16	327	246	189	149	119	97	80	56	40	
5¼"	22	293	232	185	148	119	96	77	48	27	
	20	361	288	232	188	154	126	103	68	44	
	18	480	386	314	258	214	178	149	105	73	
	16	602	487	398	313	250	203	168	118	86	
5½"	22	307	242	193	155	125	100	80	50	28	
	20	378	301	242	197	161	132	108	71	46	
	18	503	404	329	271	224	187	156	110	76	
	16	631	510	418	346	285	231	190	134	97	

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 2.0D DOVETAIL DECK-SLAB LIGHT WEIGHT CONCRETE (110 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
4"	2"	22	7'-6"	8'-8"	8'-10"	35.4	4.43	3.30	3.97
		20	8'-8"	9'-7"	9'-11"	35.9	4.79	3.90	3.97
		18	10'-6"	11'-0"	11'-5"	36.7	5.36	4.96	3.97
		16	11'-10"	12'-5"	12'-10"	37.6	5.89	6.02	3.97
4½"	2½"	22	7'-2"	8'-4"	8'-6"	40.0	6.11	3.68	4.32
		20	8'-4"	9'-3"	9'-6"	40.5	6.59	4.36	4.47
		18	10'-1"	10'-8"	11'-0"	41.3	7.36	5.55	4.47
		16	11'-6"	11'-11"	12'-4"	42.2	8.09	6.76	4.47
5¼"	3¼"	22	6'-10"	7'-11"	8'-1"	46.9	9.33	4.27	4.60
		20	7'-11"	8'-9"	9'-0"	47.4	10.04	5.08	5.15
		18	9'-6"	10'-1"	10'-5"	48.2	11.21	6.48	5.21
		16	10'-11"	11'-4"	11'-9"	49.1	12.30	7.91	5.21

**Note:**

- Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf)      LWC (110 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft.-in.)								
		10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	18'-0"	20'-0"
4"	22	193	145	112	88	70	57	47	33	24
	20	209	157	121	95	76	61	51	35	26
	18	234	175	135	106	85	69	57	40	29
	16	257	193	149	117	93	76	62	44	32
4½"	22	254	200	154	121	97	79	65	45	33
	20	287	216	166	131	104	85	70	49	35
	18	321	241	186	146	117	95	78	55	40
	16	353	265	204	160	128	104	86	60	44
5¼"	22	294	235	190	155	127	105	86	58	38
	20	358	288	234	192	159	130	107	75	54
	18	470	367	283	222	178	145	119	83	61
	16	537	403	311	244	195	159	131	92	67

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 2.0D DOVETAIL DECK-SLAB

## 2.0D Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
					4D 65/60BG
<b>Normal Weight Concrete (145 pcf)</b>					
4	2	1.12	0.028	6x6-W1.4xW1.4	23
4½	2½	1.28	0.028	6x6-W1.4xW1.4	18
4¾	2¾	1.35	0.028	6x6-W1.4xW1.4	16
5	3	1.43	0.028	6x6-W1.4xW1.4	15
5¼	3¼	1.51	0.029	6x6-W2.1xW2.1	15
5½	3½	1.58	0.032	6x6-W2.1xW2.1	15
6	4	1.74	0.036	6x6-W2.1xW2.1	15
6¾	4¾	1.97	0.043	6x6-W2.9xW2.9	15
<b>Light Weight Concrete (110 pcf)</b>					
4	2	1.12	0.028	6X6-W1.4xW1.4	33
4½	2½	1.28	0.028	6x6-W1.4xW1.4	25
5	3	1.43	0.028	6x6-W1.4xW1.4	20
5¼	3¼	1.51	0.029	6x6-W2.1xW2.1	20
5½	3½	1.58	0.032	6x6-W2.1xW2.1	20
6	4	1.74	0.036	6x6-W2.1xW2.1	20

**Notes:**


1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

## 3.5D DOVETAIL DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- UL Listed

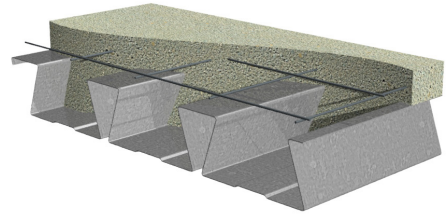

### Nominal Dimensions

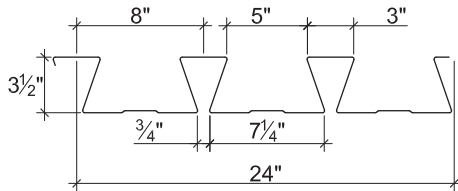

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	3.3	0.0358	40	1.762	1.646	0.676	0.781	1349	1559	3435
18	4.3	0.0474	40	2.415	2.272	0.980	1.070	1956	2136	6012
16	5.4	0.0598	40	3.133	2.968	1.317	1.377	2629	2749	8313

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
20	693	794	880	955	1459	1670	714	796	865	926	1724	1991
18	1168	1330	1467	1588	2422	2753	1310	1450	1568	1672	2927	3360
16	1793	2032	2233	2410	3681	4162	2137	2352	2533	2693	4515	5157

### Standard Features

- ASTM A653 SS GR 40 Min. with G90
- Standard lengths – 6'-0" to 42'-0"
- Tables conform to ANSI/SDI C-2017
- IAPMO UES ER-423 and UL Listed

### Optional Features

- Inquire regarding cost and lead times for:
  - 19 gage
  - Short cuts < 6'-0"
  - Alternative metallic and painted finishes

# 3.5D DOVETAIL DECK-SLAB NORMAL WEIGHT CONCRETE (145 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
Total	Topping	Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
			1	2	3				
5½"	2"	20	10'-11"	12'-2"	12'-7"	59.9	14.40	6.87	4.52
		18	13'-6"	14'-3"	14'-8"	60.9	15.99	8.74	4.52
		16	14'-9"	16'-1"	16'-7"	62.0	17.61	10.32	4.52
5¾"	2¼"	20	10'-9"	11'-11"	12'-4"	62.9	16.27	7.13	4.72
		18	13'-3"	14'-0"	14'-5"	63.9	18.03	9.13	4.72
		16	14'-7"	15'-9"	16'-4"	65.0	19.75	11.10	4.72
6"	2½"	20	10'-6"	11'-9"	12'-1"	65.9	18.29	7.39	4.93
		18	13'-0"	13'-9"	14'-2"	66.9	20.24	9.47	4.93
		16	14'-5"	15'-6"	16'-0"	68.0	22.14	11.59	4.93

**Note:**

- Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

## Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)

NWC (145 pcf),  $f'_c = 3000$  psi

Total Slab Depth	Deck Gage	Span (ft.-in.)								
		15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	20	184	153	128	107	91	77	64	44	28
	18	207	170	142	119	101	87	75	57	44
	16	228	187	156	131	112	96	83	63	49
5¾"	20	190	159	134	113	95	79	66	44	28
	18	233	192	160	135	114	98	85	64	50
	16	255	210	175	147	125	107	93	70	55
6"	20	196	165	138	116	97	81	68	45	28
	18	262	215	180	151	128	110	95	72	54
	16	286	236	196	165	141	120	104	79	61

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 3.5D DOVETAIL DECK-SLAB LIGHT WEIGHT CONCRETE (110 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
Total	Topping	Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
			1	2	3				
5½"	2"	20	12'-2"	13'-5"	13'-10"	46.2	11.18	6.37	4.52
		18	14'-10"	15'-8"	16'-2"	47.2	12.69	7.86	4.52
		16	15'-9"	17'-8"	18'-2"	48.3	14.26	9.44	4.52
5¾"	2¼"	20	11'-11"	13'-2"	13'-8"	48.5	12.57	6.81	4.72
		18	14'-8"	15'-5"	15'-11"	49.5	14.13	8.35	4.72
		16	15'-7"	17'-4"	17'-11"	50.6	15.75	9.88	4.72
8"	4½"	20	10'-5"	11'-7"	12'-0"	69.1	31.09	9.31	5.61
		18	12'-10"	13'-7"	14'-0"	70.1	34.56	11.92	6.57
		16	14'-4"	15'-4"	15'-10"	71.2	37.85	14.57	6.57

**Note:**

- Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

## Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)      LWC (110 pcf), $f'_c = 3000$ psi

Total Slab Depth	Deck Gage	Span (ft.-in.)								
		15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	20	144	119	99	83	71	61	52	40	31
	18	164	135	112	95	80	69	59	45	35
	16	184	152	126	106	90	77	67	51	39
5¾"	20	162	134	111	94	80	68	59	45	35
	18	182	150	125	105	90	77	66	50	39
	16	203	168	140	118	100	86	74	56	44
8"	20	262	221	188	160	137	117	99	71	50
	18	353	302	259	224	194	168	146	110	82
	16	446	384	332	283	241	206	178	135	105

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 3.5D F DOVETAIL DECK-SLAB

ASD

## 3.5D Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
<b>Normal Weight Concrete (145 pcf)</b>					
5½	2	1.44	0.028	6x6-W1.4xW1.4	23
5¾	2¼	1.52	0.028	6x6-W1.4xW1.4	20
6	2½	1.60	0.028	6x6-W1.4xW1.4	18
6½	3	1.75	0.028	6x6-W1.4xW1.4	15
7	3½	1.91	0.032	6x6-W2.1xW2.1	15
7¼	3¾	1.98	0.034	6x6-W2.1xW2.1	15
7½	4	2.06	0.036	6x6-W2.1xW2.1	15
8	4½	2.22	0.041	6x6-W2.1xW2.1	15
<b>Light Weight Concrete (110 pcf)</b>					
5½	2	1.44	0.028	6x6-W1.4xW1.4	33
5¾	2¼	1.52	0.028	6x6-W1.4xW1.4	28
6	2½	1.60	0.028	6x6-W1.4xW1.4	25
6½	3	1.75	0.028	6x6-W1.4xW1.4	20
7	3½	1.91	0.032	6x6-W2.1xW2.1	20
7½	4	2.06	0.036	6x6-W2.1xW2.1	20
8	4½	2.22	0.041	6x6-W2.1xW2.1	20

### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

# 2.0DS-30 FL DOVETAIL DECK GRADE 50 STEEL



ASD

## 2.0DS-30 FL DOVETAIL DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- UL Listed



## Nominal Dimensions

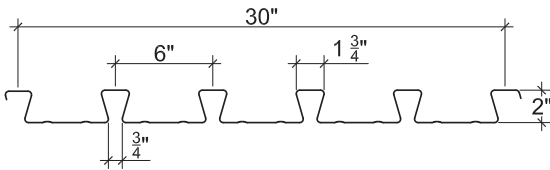

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	2.2	0.0299	50	0.430	0.382	0.301	0.306	752	763	3334
20	2.7	0.0359	50	0.520	0.473	0.378	0.373	943	930	3978
18	3.6	0.0478	50	0.695	0.661	0.527	0.509	1315	1269	5229
16	4.5	0.0598	50	0.872	0.856	0.667	0.648	1664	1617	6455

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
22	833	916	1054	1171	1557	1794	859	926	1037	1130	1905	2217
20	1166	1278	1465	1622	2186	2503	1272	1366	1523	1655	2706	3130
18	1970	2148	2446	2698	3707	4201	2322	2480	2745	2968	4656	5331
16	2964	3218	3646	4007	5590	6279	3684	3919	4313	4646	7085	8040

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI C-2017
- IAPMO UES ER-423 and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 21, 19, or 17 gage
  - Alternative metallic and painted finishes

# 2.0DS-30 FL DOVETAIL DECK-SLAB NORMAL WEIGHT CONCRETE (145 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
4"	2"	22	8'-6"	9'-5"	9'-9"	45.5	5.74	4.34	3.72
		20	9'-9"	10'-4"	10'-8"	46.0	6.14	5.11	3.72
		18	10'-8"	12'-0"	12'-5"	46.9	6.85	6.56	3.72
		16	11'-5"	13'-6"	13'-4"	47.8	7.48	7.93	3.72
5¼"	¾"	22	7'-8"	8'-6"	8'-9"	60.6	12.20	5.64	4.89
		20	8'-9"	9'-4"	9'-8"	61.1	13.00	6.66	4.89
		18	9'-9"	10'-11"	11'-3"	62.0	14.44	8.58	4.89
		16	10'-6"	12'-3"	12'-6"	62.9	15.73	10.43	4.89
5½"	¾"	22	7'-6"	8'-4"	8'-8"	63.6	13.88	5.91	5.12
		20	8'-7"	9'-2"	9'-6"	64.1	14.79	6.97	5.12
		18	9'-8"	10'-8"	11'-1"	65.0	16.41	9.00	5.12
		16	10'-4"	12'-0"	12'-4"	65.9	17.88	10.95	5.12

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

Total Slab Depth		Deck Gage	Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)								NWC (145 pcf), $f'_c = 3000$ psi
			Span (ft-in.)								
			10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	18'-0"	20'-0"
4"		22	250	188	145	114	91	74	61	43	31
		20	268	201	155	122	97	79	65	46	33
		18	299	224	173	136	109	88	73	51	37
		16	327	245	189	148	119	96	79	56	40
5¼"		22	390	312	252	206	169	139	115	78	52
		20	471	378	308	253	207	168	138	97	71
		18	624	474	365	287	229	186	154	108	78
		16	687	516	397	312	250	203	167	117	85
5½"		22	408	326	264	216	177	146	120	82	54
		20	493	396	323	266	220	183	153	108	75
		18	655	530	415	326	261	212	175	122	89
		16	781	586	452	355	284	231	190	133	97

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 2.0DS-30 FL DOVETAIL DECK-SLAB LIGHT WEIGHT CONCRETE (110 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
4"	2"	22	9'-4"	10'-4"	10'-8"	35.0	4.44	4.15	3.72
		20	10'-8"	11'-4"	11'-9"	35.5	4.77	4.87	3.72
		18	11'-7"	13'-2"	13'-4"	36.4	5.36	6.21	3.72
		16	12'-2"	14'-9"	14'-2"	37.3	5.88	7.48	3.72
4½"	2½"	22	8'-11"	9'-11"	10'-3"	39.6	6.12	4.65	4.19
		20	10'-3"	10'-11"	11'-3"	40.1	6.58	5.46	4.19
		18	11'-3"	12'-8"	13'-0"	41.0	7.37	6.97	4.19
		16	11'-10"	14'-2"	13'-9"	41.9	8.07	8.41	4.19
5¼"	3¼"	22	8'-6"	9'-5"	9'-9"	46.5	9.36	5.42	4.88
		20	9'-9"	10'-4"	10'-8"	47.0	10.04	6.38	4.89
		18	10'-8"	12'-0"	12'-5"	47.9	11.23	8.18	4.89
		16	11'-5"	13'-6"	13'-4"	48.8	12.29	9.89	4.89

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

Total Slab Depth		Deck Gage	Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)								LWC (110 pcf), $f'_c = 3000$ psi
			Span (ft.-in.)								
			10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	18'-0"	20'-0"
4"	22		194	145	112	88	70	57	47	33	24
	20		208	156	120	94	76	61	50	35	26
	18		234	176	135	106	85	69	57	40	29
	16		257	193	148	117	93	76	62	44	32
4½"	22		267	201	154	121	97	79	65	45	33
	20		287	215	166	130	104	85	70	49	35
	18		322	242	186	146	117	95	78	55	40
	16		352	265	204	160	128	104	86	60	44
5¼"	22		387	307	236	186	149	121	99	70	51
	20		438	329	253	199	159	129	107	75	54
	18		490	368	284	223	178	145	119	84	61
	16		536	403	310	244	195	159	131	92	67

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 2.0DS-30 FL DOVETAIL DECK-SLAB

## 2.0DS-30 FL Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
				4D 65/60BG	
<b>Normal Weight Concrete (145 pcf)</b>					
4	2	1.11	0.028	6x6-W1.4xW1.4	23
4½	2½	1.26	0.028	6x6-W1.4xW1.4	18
4¾	2¾	1.34	0.028	6x6-W1.4xW1.4	16
5	3	1.41	0.028	6x6-W1.4xW1.4	15
5¼	3¼	1.49	0.029	6x6-W2.1xW2.1	15
5½	3½	1.57	0.032	6x6-W2.1xW2.1	15
6	4	1.72	0.036	6x6-W2.1xW2.1	15
6¾	4¾	1.95	0.043	6x6-W2.9xW2.9	15
<b>Light Weight Concrete (110 pcf)</b>					
4	2	1.11	0.028	6X6-W1.4xW1.4	33
4½	2½	1.26	0.028	6x6-W1.4xW1.4	25
5	3	1.41	0.028	6x6-W1.4xW1.4	20
5¼	3¼	1.49	0.029	6x6-W2.1xW2.1	20
5½	3½	1.57	0.032	6x6-W2.1xW2.1	20
6	4	1.72	0.036	6x6-W2.1xW2.1	20

**Notes:**

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

# 2.0DF-30 FL DOVETAIL DECK GRADE 50 STEEL



ASD

## 2.0DF-30 FL DOVETAIL DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- UL Listed

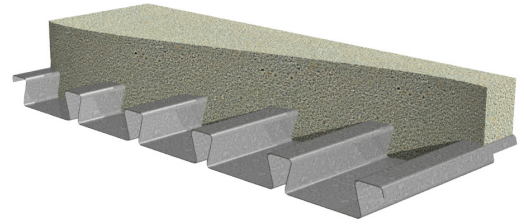

## Nominal Dimensions

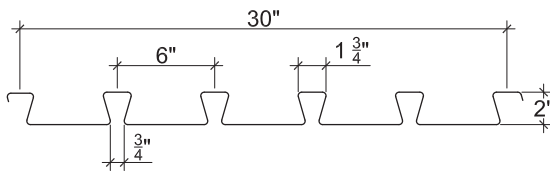

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_o)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20	2.7	0.0359	50	0.524	0.468	0.380	0.344	947	859	3978
18	3.6	0.0478	50	0.699	0.660	0.530	0.491	1322	1225	5229
16	4.5	0.0598	50	0.877	0.857	0.670	0.632	1673	1576	6455

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	5"	1 1/2"	2"	3"	4"	3"	5"
20	1166	1278	1465	1622	2186	2503	1272	1366	1523	1655	2706	3130
18	1970	2148	2446	2698	3707	4201	2322	2480	2745	2968	4656	5331
16	2964	3218	3646	4007	5590	6279	3684	3919	4313	4646	7085	8040

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI C-2017
- IAPMO UES ER-423 and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 19 or 17 gage
  - Alternative metallic and painted finishes

# 2.0DF-30 FL DOVETAIL DECK-SLAB NORMAL WEIGHT CONCRETE (145 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
Total	Topping	Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
			1	2	3				
4"	2"	20	9'-9"	9'-11"	10'-3"	46.0	6.14	5.11	3.72
		18	10'-8"	11'-10"	12'-2"	46.9	6.85	6.55	3.72
		16	11'-5"	13'-4"	13'-4"	47.8	7.49	7.93	3.72
5¼"	¾"	20	8'-9"	9'-0"	9'-4"	61.1	12.99	6.65	4.89
		18	9'-10"	10'-8"	11'-1"	62.0	14.43	8.57	4.89
		16	10'-6"	12'-1"	12'-6"	62.9	15.72	10.42	4.89
5½"	¾"	20	8'-7"	8'-10"	9'-2"	64.1	14.78	6.96	5.12
		18	9'-8"	10'-6"	10'-10"	65.0	16.41	8.99	5.12
		16	10'-4"	11'-11"	12'-3"	65.9	17.87	10.94	5.12

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

Total Slab Depth		Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)									NWC (145 pcf), $f'_c = 3000$ psi
Total Slab Depth	Deck Gage	Span (ft.-in.)									
		10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	18'-0"	20'-0"	
4"	20	268	201	155	122	97	79	65	46	33	
	18	299	224	173	136	109	88	73	51	37	
	16	327	245	189	148	119	96	79	56	40	
5¼"	20	470	378	308	253	206	168	138	97	70	
	18	623	473	364	287	229	186	153	108	78	
	16	687	516	397	312	250	203	167	117	85	
5½"	20	493	396	322	265	220	183	153	107	75	
	18	654	529	414	326	261	212	175	122	89	
	16	780	586	451	355	284	231	190	133	97	

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 2.0DF-30 FL DOVETAIL DECK-SLAB LIGHT WEIGHT CONCRETE (110 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
Total	Topping	Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
			1	2	3				
4"	2"	20	10'-8"	10'-11"	11'-3"	35.5	4.78	4.87	3.72
		18	11'-7"	12'-11"	13'-4"	36.4	5.37	6.21	3.72
		16	12'-2"	14'-7"	14'-2"	37.3	5.89	7.48	3.72
4½"	2½"	20	10'-3"	10'-6"	10'-10"	40.1	6.58	5.46	4.19
		18	11'-3"	12'-5"	12'-10"	41.0	7.37	6.97	4.19
		16	11'-10"	14'-0"	13'-10"	41.9	8.08	8.41	4.19
5¼"	3¼"	20	9'-9"	9'-11"	10'-3"	47.0	10.03	6.37	4.89
		18	10'-8"	11'-10"	12'-2"	47.9	11.23	8.17	4.89
		16	11'-5"	13'-4"	13'-4"	48.8	12.28	9.88	4.89

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf)**

LWC (110 pcf),  $f'_c = 3000$  psi

Total Slab Depth	Deck Gage	Span (ft-in.)								
		10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"	18'-0"	20'-0"
4"	20	208	156	120	95	76	61	50	35	26
	18	234	176	135	106	85	69	57	40	29
	16	257	193	148	117	93	76	62	44	32
4½"	20	287	215	166	130	104	85	70	49	35
	18	322	242	186	146	117	95	78	55	40
	16	352	265	204	160	128	104	86	60	44
5¼"	20	438	329	253	199	159	129	107	75	54
	18	490	368	284	223	178	145	119	84	61
	16	536	403	310	244	195	159	131	92	67

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 2.0DF-30 FL DOVETAIL DECK-SLAB

ASD

## 2.0DF-30 FL Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
					4D 65/60BG
<b>Normal Weight Concrete (145 pcf)</b>					
4	2	1.11	0.028	6x6-W1.4xW1.4	23
4½	2½	1.26	0.028	6x6-W1.4xW1.4	18
4¾	2¾	1.34	0.028	6x6-W1.4xW1.4	16
5	3	1.41	0.028	6x6-W1.4xW1.4	15
5¼	3¼	1.49	0.029	6x6-W2.1xW2.1	15
5½	3½	1.57	0.032	6x6-W2.1xW2.1	15
6	4	1.72	0.036	6x6-W2.1xW2.1	15
6¾	4¾	1.95	0.043	6x6-W2.9xW2.9	15
<b>Light Weight Concrete (110 pcf)</b>					
4	2	1.11	0.028	6X6-W1.4xW1.4	33
4½	2½	1.26	0.028	6x6-W1.4xW1.4	25
5	3	1.41	0.028	6x6-W1.4xW1.4	20
5¼	3¼	1.49	0.029	6x6-W2.1xW2.1	20
5½	3½	1.57	0.032	6x6-W2.1xW2.1	20
6	4	1.72	0.036	6x6-W2.1xW2.1	20

### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

# 3.5DS-24 FL DOVETAIL DECK GRADE 50 STEEL



ASD

## 3.5DS-24 FL DOVETAIL DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- UL Listed

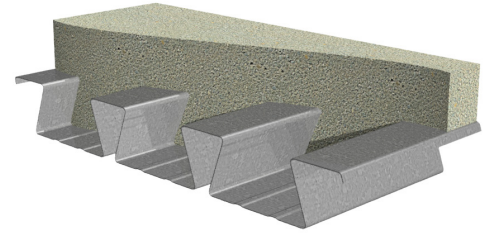

## Nominal Dimensions

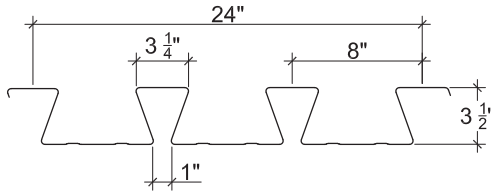

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_n +/\Omega$ (lb-ft/ft)	$M_n -/\Omega$ (lb-ft/ft)	
20	3.4	0.0359	50	1.951	1.805	0.714	0.757	1781	1889	3754
18	4.5	0.0478	50	2.681	2.505	1.052	1.108	2626	2765	6813
16	5.6	0.0598	50	3.421	3.243	1.414	1.505	3527	3756	9781

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
20	859	985	1091	1184	1735	1985	850	948	1030	1103	2046	2363
18	1465	1668	1840	1991	2933	3334	1592	1762	1905	2031	3542	4066
16	2217	2512	2760	2979	4415	4992	2565	2823	3040	3232	5411	6179

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI C-2017
- IAPMO UES ER-423 and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 19 or 17 gage
  - Alternative metallic and painted finishes

# 3.5DS-24 FL DOVETAIL DECK-SLAB NORMAL WEIGHT CONCRETE (145 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
5½"	2"	20	13'-0"	13'-6"	13'-11"	58.6	14.12	8.21	4.29
		18	14'-4"	16'-3"	16'-6"	59.7	15.73	10.54	4.29
		16	15'-2"	18'-8"	17'-6"	60.8	17.27	12.35	4.29
5¾"	2¼"	20	12'-8"	13'-3"	13'-8"	61.6	15.95	8.53	4.49
		18	14'-2"	16'-0"	16'-4"	62.7	17.72	10.96	4.49
		16	15'-0"	18'-5"	17'-4"	63.8	19.36	13.3	4.49
6"	2½"	20	12'-6"	13'-0"	13'-5"	64.7	17.93	8.85	4.68
		18	14'-0"	15'-9"	16'-1"	65.8	19.89	11.38	4.68
		16	14'-10"	18'-3"	17'-2"	66.9	21.69	13.81	4.68

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

## Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)      NWC (145 pcf), $f'_c = 3000$ psi

Total Slab Depth	Deck Gage	Span (ft-in.)								
		15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	20	182	150	125	105	89	77	66	50	39
	18	203	167	139	117	100	85	74	56	43
	16	223	184	153	129	110	94	81	62	48
5¾"	20	206	170	141	119	101	87	75	57	44
	18	229	189	157	132	112	96	83	63	49
	16	250	206	172	145	123	105	91	69	54
6"	20	232	191	159	134	114	97	84	64	48
	18	257	212	176	149	126	108	93	71	55
	16	280	231	192	162	138	118	102	77	60

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 3.5DS-24 FL DOVETAIL DECK-SLAB LIGHT WEIGHT CONCRETE (110 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
Total	Topping	Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
			1	2	3				
5½"	2"	20	14'-2"	14'-11"	15'-5"	45.3	10.97	7.66	4.29
		18	15'-3"	17'-11"	17'-7"	46.4	12.49	9.46	4.29
		16	16'-2"	19'-10"	18'-8"	47.5	13.99	11.27	4.29
5¾"	2¼"	20	14'-0"	14'-8"	15'-1"	47.6	12.33	8.14	4.49
		18	15'-1"	17'-8"	17'-5"	48.7	13.90	10.06	4.49
		16	16'-0"	19'-8"	18'-6"	49.8	15.44	11.82	4.49
8"	4½"	20	12'-3"	12'-10"	13'-3"	68.2	30.55	11.27	5.77
		18	13'-10"	15'-6"	16'-0"	69.3	34.03	14.45	6.24
		16	14'-8"	18'-0"	17'-0"	70.4	37.15	17.51	6.24

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf)      LWC (110 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	20	142	117	97	82	69	59	51	39	30
	18	161	133	111	93	79	68	58	44	34
	16	181	149	124	104	89	76	66	50	39
5¾"	20	159	131	109	92	78	67	58	44	34
	18	180	148	123	104	88	75	65	49	38
	16	199	164	137	115	98	84	72	55	43
8"	20	332	283	243	210	181	157	136	102	76
	18	440	363	302	254	216	185	160	122	95
	16	481	396	330	278	236	202	175	133	103

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 3.5DS-24 FL DOVETAIL DECK-SLAB

ASD

## 3.5DS-24 FL Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
<b>4D 65/60BG</b>					
<b>Normal Weight Concrete (145 pcf)</b>					
5½	2	1.41	0.028	6x6-W1.4xW1.4	23
5¾	2¼	1.49	0.028	6x6-W1.4xW1.4	20
6	2½	1.56	0.028	6x6-W1.4xW1.4	18
6½	3	1.72	0.028	6x6-W1.4xW1.4	15
7	3½	1.87	0.032	6x6-W2.1xW2.1	15
7¼	3¾	1.95	0.034	6x6-W2.1xW2.1	15
7½	4	2.03	0.036	6x6-W2.1xW2.1	15
8	4½	2.18	0.041	6x6-W2.1xW2.1	15
<b>Light Weight Concrete (110 pcf)</b>					
5½	2	1.41	0.028	6x6-W1.4xW1.4	33
5¾	2¼	1.49	0.028	6x6-W1.4xW1.4	28
6	2½	1.56	0.028	6x6-W1.4xW1.4	25
6½	3	1.72	0.028	6x6-W1.4xW1.4	20
7	3½	1.87	0.032	6x6-W2.1xW2.1	20
7½	4	2.03	0.036	6x6-W2.1xW2.1	20
8	4½	2.18	0.041	6x6-W2.1xW2.1	20

### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

# 3.5DF-24 FL DOVETAIL DECK GRADE 50 STEEL



ASD

## 3.5DF-24 FL DOVETAIL DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- UL Listed

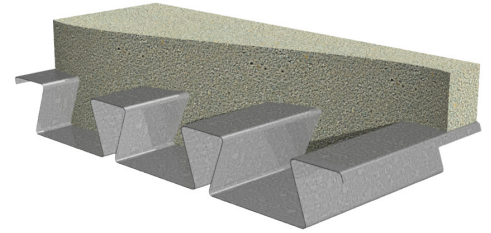

## Nominal Dimensions

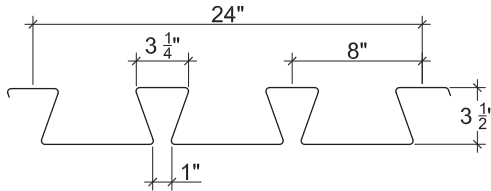

## Section Properties

Deck Gage	Deck Weight $W_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
18	4.5	0.0478	50	2.688	2.496	1.055	0.935	2633	2333	6813
16	5.6	0.0598	50	3.430	3.256	1.417	1.289	3536	3217	9781

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
18	1465	1668	1840	1991	2933	3334	1592	1762	1905	2031	3542	4066
16	2217	2512	2760	2979	4415	4992	2565	2823	3040	3232	5411	6179

## Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI C-2017
- IAPMO UES ER-423 and UL Listed

## Optional Features

- Inquire regarding cost and lead times for:
  - 17 gage
  - Alternative metallic and painted finishes

# 3.5DF-24 FL DOVETAIL DECK-SLAB NORMAL WEIGHT CONCRETE (145 pcf)

Slab Depth		Maximum Unshored Spans			Composite Deck-Slab Properties				
Total	Topping	Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
			1	2	3				
5½"	2"	18	14'-4"	15'-0"	15'-6"	59.7	15.73	10.54	4.29
		16	15'-2"	17'-6"	17'-6"	60.8	17.27	12.35	4.29
5¾"	2¼"	18	14'-2"	14'-8"	15'-2"	62.7	17.72	10.95	4.49
		16	15'-0"	17'-2"	17'-4"	63.8	19.36	13.29	4.49
6"	2½"	18	14'-0"	14'-5"	14'-11"	65.8	19.88	11.37	4.68
		16	14'-10"	16'-11"	17'-2"	66.9	21.69	13.80	4.68

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

## Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf) NWC (145 pcf), $f'_c = 3000$ psi

Total Slab Depth	Deck Gage	Span (ft-in.)								
		15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	18	203	167	139	117	100	85	74	56	43
	16	223	184	153	129	110	94	81	62	48
5¾"	18	229	189	157	132	112	96	83	63	49
	16	250	206	172	145	123	105	91	69	54
6"	18	257	212	176	149	126	108	93	71	55
	16	280	231	192	162	138	118	102	77	60

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 3.5DF-24 FL DOVETAIL DECK-SLAB LIGHT WEIGHT CONCRETE (110 pcf)

Slab Depth		Maximum Unshored Spans				Composite Deck-Slab Properties			
Total	Topping	Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
			1	2	3				
5½"	2"	18	15'-4"	16'-6"	17'-0"	46.4	12.49	9.46	4.29
		16	16'-2"	19'-3"	18'-8"	47.5	13.99	11.27	4.29
5¾"	2¼"	18	15'-1"	16'-2"	16'-9"	48.7	13.90	10.06	4.49
		16	16'-0"	18'-11"	18'-6"	49.8	15.44	11.82	4.49
8"	4½"	18	13'-11"	14'-3"	14'-9"	69.3	34.01	14.43	6.24
		16	14'-8"	16'-8"	17'-0"	70.4	37.13	17.48	6.24

**Notes:**

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

## Superimposed Allowable Load, $W_n/\Omega$ , Limited by L/360 (psf)

LWC (110 pcf),  $f'_c = 3000$  psi

Total Slab Depth	Deck Gage	Span (ft-in.)								
		15'-0"	16'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	18	161	133	111	93	79	68	58	44	34
	16	181	149	124	104	89	76	66	50	39
5¾"	18	180	148	123	104	88	75	65	49	38
	16	199	164	137	115	98	84	72	55	43
8"	18	440	362	302	254	216	185	160	122	95
	16	480	396	330	278	236	202	175	133	103

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or LRFD design.

# 3.5DF-24 FL DOVETAIL DECK-SLAB

ASD

## 3.5DF-24 FL Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
					4D 65/60BG
<b>Normal Weight Concrete (145 pcf)</b>					
5½	2	1.41	0.028	6x6-W1.4xW1.4	23
5¾	2¼	1.49	0.028	6x6-W1.4xW1.4	20
6	2½	1.56	0.028	6x6-W1.4xW1.4	18
6½	3	1.72	0.028	6x6-W1.4xW1.4	15
7	3½	1.87	0.032	6x6-W2.1xW2.1	15
7¼	3¾	1.95	0.034	6x6-W2.1xW2.1	15
7½	4	2.03	0.036	6x6-W2.1xW2.1	15
8	4½	2.18	0.041	6x6-W2.1xW2.1	15
<b>Light Weight Concrete (110 pcf)</b>					
5½	2	1.41	0.028	6x6-W1.4xW1.4	33
5¾	2¼	1.49	0.028	6x6-W1.4xW1.4	28
6	2½	1.56	0.028	6x6-W1.4xW1.4	25
6½	3	1.72	0.028	6x6-W1.4xW1.4	20
7	3½	1.87	0.032	6x6-W2.1xW2.1	20
7½	4	2.03	0.036	6x6-W2.1xW2.1	20
8	4½	2.18	0.041	6x6-W2.1xW2.1	20

### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

# 1.5VL-36/1.5VLI-36/1.5PLVLI-36 COMPOSITE DECKS GRADE 50 STEEL



ASD

## 1.5VL COMPOSITE DECKS

- 1.5VL-36 Deck used with Side-lap Screws
- 1.5VLI-36 Deck used with TSWs or BPs
- 1.5PLVLI-36 Deck used with PunchLok® II System

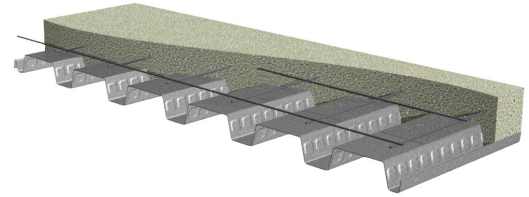

## Nominal Dimensions

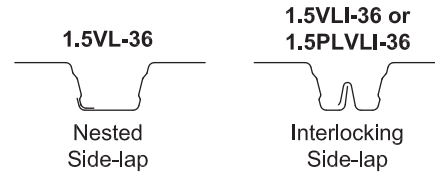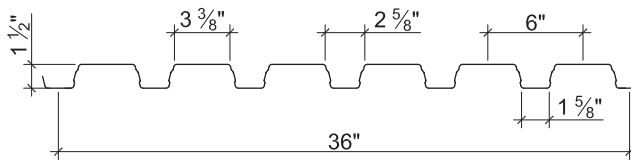

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.6	0.0295	50	0.155	0.178	0.169	0.179	422	447	2654
20	2.0	0.0358	50	0.197	0.217	0.224	0.229	559	571	3207
19	2.3	0.0418	50	0.239	0.257	0.266	0.278	663	693	3728
18	2.6	0.0474	50	0.277	0.290	0.306	0.318	763	793	4209
16	3.3	0.0598	50	0.364	0.367	0.393	0.402	981	1003	5261

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
22	807	887	1021	1115	1482	1602	842	908	1017	1093	1834	1994
20	1153	1263	1448	1574	2127	2289	1274	1368	1525	1632	2662	2881
19	1532	1674	1913	2071	2839	3043	1766	1891	2100	2239	3579	3859
18	1931	2105	2398	2588	3586	3831	2297	2454	2716	2887	4546	4884
16	2958	3212	3639	3900	5517	5855	3713	3950	4347	4590	7050	7523

## Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer bottom optional
- ASTM A1008 SS GR50 Min. with gray primer bottom
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Factory Hanger Tabs

# 1.5VL-36/1.5VLI-36/1.5PLVLI-36 COMPOSITE DECK-SLABS

## NORMAL WEIGHT CONCRETE (145 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
3½"	2"	22	6'-5"	7'-6"	7'-8"	32.2	2.64	1.84	2.01
		20	7'-9"	9'-1"	9'-2"	32.6	2.85	2.16	2.01
		19	8'-4"	9'-11"	10'-3"	32.9	3.03	2.47	2.01
		18	8'-9"	10'-7"	11'-0"	33.2	3.19	2.74	2.01
		16	9'-6"	11'-10"	11'-8"	33.9	3.52	3.30	2.01
5"	3½"	22	5'-7"	6'-7"	6'-8"	50.3	7.62	3.22	3.29
		20	6'-9"	7'-10"	7'-11"	50.7	8.18	3.83	3.29
		19	7'-3"	8'-8"	8'-10"	51.0	8.68	4.40	3.29
		18	7'-8"	9'-3"	9'-6"	51.3	9.12	4.90	3.29
		16	8'-4"	10'-4"	10'-4"	52.0	10.02	6.00	3.29
6"	4½"	22	5'-3"	6'-1"	6'-2"	62.4	13.11	4.24	4.27
		20	6'-3"	7'-3"	7'-5"	62.8	14.02	5.05	4.27
		19	6'-10"	8'-0"	8'-2"	63.1	14.85	5.81	4.27
		18	7'-2"	8'-7"	8'-10"	63.4	15.57	6.50	4.27
		16	7'-10"	9'-7"	9'-8"	64.1	17.06	7.98	4.27

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf)      NWC (145 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
3½"	22	886	555	375	267	197	149	114	86	66
	20	974	659	448	320	237	170	124	93	72
	19	974	757	515	370	258	181	132	99	76
	18	974	772	574	406	272	191	139	104	80
	16	973	771	637	448	300	210	153	115	88
5"	22	1560	980	665	475	352	267	207	162	128
	20	1593	1174	800	574	427	327	255	202	161
	19	1592	1264	925	666	498	383	300	239	193
	18	1592	1263	1038	749	561	433	341	272	221
	16	1591	1263	1043	887	697	540	427	329	253
6"	22	2055	1292	878	629	467	355	276	217	172
	20	2074	1552	1058	761	568	435	341	270	217
	19	2073	1646	1228	885	663	510	401	321	259
	18	2073	1646	1361	997	749	578	456	366	297
	16	2072	1645	1360	1156	933	724	574	463	379

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 1.5VL-36/1.5VLI-36/1.5PLVLI-36 COMPOSITE DECK-SLABS LIGHT WEIGHT CONCRETE (110 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
3½"	2"	22	6'-11"	8'-2"	8'-3"	24.8	2.07	1.74	2.01
		20	8'-5"	9'-10"	10'-0"	25.2	2.24	2.04	2.01
		19	9'-2"	10'-9"	11'-2"	25.5	2.39	2.31	2.01
		18	9'-7"	11'-6"	11'-10"	25.8	2.52	2.56	2.01
		16	10'-5"	12'-10"	12'-5"	26.5	2.79	3.07	2.01
4"	2½"	22	6'-8"	7'-10"	7'-11"	29.4	3.06	2.14	2.41
		20	8'-0"	9'-4"	9'-7"	29.8	3.31	2.52	2.41
		19	8'-8"	10'-4"	10'-8"	30.1	3.54	2.87	2.41
		18	9'-1"	11'-0"	11'-4"	30.4	3.73	3.18	2.41
		16	9'-10"	12'-3"	12'-0"	31.1	4.12	3.84	2.41
4¾"	¾"	22	6'-3"	7'-4"	7'-5"	36.3	5.07	2.84	3.06
		20	7'-7"	8'-10"	8'-11"	36.7	5.48	3.36	3.06
		19	8'-2"	9'-8"	10'-0"	37.0	5.85	3.84	3.06
		18	8'-6"	10'-4"	10'-8"	37.3	6.17	4.27	3.06
		16	9'-3"	11'-7"	11'-5"	38.0	6.81	5.18	3.06

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf) LWC (110 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
3½"	22	843	531	361	258	176	123	90	67	52
	20	982	626	427	285	191	134	97	73	56
	19	981	715	484	305	204	143	104	78	60
	18	981	779	510	321	215	151	110	82	63
	16	980	779	564	355	238	167	121	91	70
4"	22	1040	655	446	319	238	181	133	100	77
	20	1176	776	530	381	282	198	144	108	83
	19	1175	888	608	438	301	212	154	116	89
	18	1175	934	676	475	318	223	162	122	94
	16	1174	933	772	524	351	246	179	135	104
4¾"	22	1386	874	595	428	319	244	191	151	121
	20	1492	1039	710	512	383	295	232	180	138
	19	1492	1186	817	590	443	342	255	192	148
	18	1492	1186	912	660	496	369	269	202	156
	16	1491	1185	981	808	581	408	297	223	172

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 1.5VL-36/1.5VLI-36/1.5PLVLI-36 COMPOSITE DECK-SLABS

ASD

## 1.5VL-36/1.5VLI-36/1.5PLVLI-36 Composite Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
<b>4D 65/60BG</b>					
<b>Normal Weight Concrete (145 pcf)</b>					
3½	2	0.78	0.028	6x6-W1.4xW1.4	23
4	2½	0.94	0.028	6x6-W1.4xW1.4	18
4½	3	1.09	0.028	6x6-W1.4xW1.4	15
5	3½	1.24	0.032	6x6-W2.1xW2.1	15
5½	4	1.40	0.036	6x6-W2.1xW2.1	15
6	4½	1.55	0.041	6x6-W2.1xW2.1	15
<b>Light Weight Concrete (110 pcf)</b>					
3½	2	0.78	0.028	6x6-W1.4xW1.4	33
4	2½	0.94	0.028	6x6-W1.4xW1.4	25
4½	3	1.09	0.028	6x6-W1.4xW1.4	20
4¾	3¼	1.17	0.029	6x6-W2.1xW2.1	20
5	3½	1.24	0.032	6x6-W2.1xW2.1	20
5¾	4¼	1.48	0.038	6x6-W2.1xW2.1	20

### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

# 1.5VLR-36 COMPOSITE DECK GRADE 50 STEEL



ASD

## 1.5VLR COMPOSITE DECK

- 1.5VLR-36 Deck used with Side-lap Screws

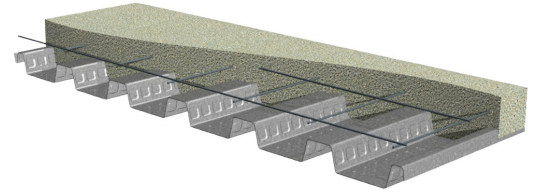

### Nominal Dimensions

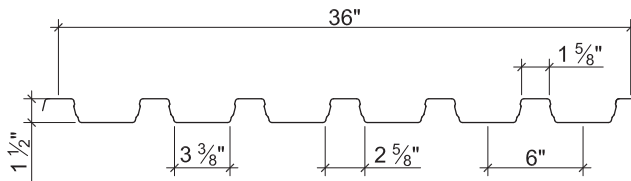

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.6	0.0295	50	0.178	0.155	0.179	0.169	447	422	2654
20	2.0	0.0358	50	0.217	0.197	0.229	0.224	571	559	3207
19	2.3	0.0418	50	0.257	0.239	0.278	0.266	693	663	3728
18	2.6	0.0474	50	0.290	0.277	0.318	0.306	793	763	4209
16	3.3	0.0598	50	0.367	0.364	0.402	0.393	1003	981	5261

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
22	807	887	1021	1115	1482	1602	842	908	1017	1093	1834	1994
20	1153	1263	1448	1574	2127	2289	1274	1368	1525	1632	2662	2881
19	1532	1674	1913	2071	2839	3043	1766	1891	2100	2239	3579	3859
18	1931	2105	2398	2588	3586	3831	2297	2454	2716	2887	4546	4884
16	2958	3212	3639	3900	5517	5855	3713	3950	4347	4590	7050	7523

### Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer bottom optional
- ASTM A1008 SS GR50 Min. with gray primer bottom
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

### Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes

# 1.5VLR-36 COMPOSITE DECK-SLABS NORMAL WEIGHT CONCRETE (145 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
3½"	2"	22	6'-5"	7'-5"	7'-7"	37.5	3.43	2.60	3.36
		20	7'-6"	8'-7"	8'-10"	37.9	3.68	3.08	3.36
		19	8'-2"	9'-4"	9'-7"	38.2	3.91	3.53	3.36
		18	8'-6"	9'-11"	10'-3"	38.5	4.11	3.93	3.36
		16	9'-2"	11'-3"	11'-3"	39.2	4.50	4.79	3.36
5"	3½"	22	5'-8"	6'-6"	6'-8"	55.6	9.34	3.80	5.03
		20	6'-7"	7'-6"	7'-9"	56.0	9.97	4.53	5.21
		19	7'-3"	8'-2"	8'-5"	56.3	10.55	5.22	5.21
		18	7'-6"	8'-9"	9'-0"	56.6	11.05	5.84	5.21
		16	8'-1"	9'-10"	10'-0"	57.3	12.09	7.18	5.21
6"	4½"	22	5'-4"	6'-1"	6'-3"	67.7	15.62	4.84	5.59
		20	6'-2"	7'-0"	7'-3"	68.1	16.63	5.78	6.10
		19	6'-10"	7'-7"	7'-10"	68.4	17.55	6.67	6.33
		18	7'-1"	8'-2"	8'-5"	68.7	18.36	7.48	6.33
		16	7'-8"	9'-2"	9'-5"	69.4	20.03	9.23	6.33

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf)      NWC (145 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
3½"	22	1261	793	539	386	287	205	150	112	86
	20	1501	947	646	464	314	220	160	120	93
	19	1640	1091	746	498	333	234	170	128	98
	18	1639	1219	830	523	350	246	179	134	103
	16	1639	1303	911	573	384	269	196	147	113
5"	22	1845	1160	789	565	419	319	248	195	155
	20	2210	1394	951	684	510	391	306	243	195
	19	2546	1614	1104	796	596	459	361	288	233
	18	2545	1813	1241	897	673	520	410	329	267
	16	2545	2024	1538	1115	840	652	517	396	305
6"	22	2351	1480	1007	722	537	410	319	252	201
	20	2822	1782	1216	875	654	502	394	314	253
	19	3095	2066	1414	1020	765	590	465	372	302
	18	3095	2324	1593	1152	866	669	529	425	346
	16	3094	2461	1980	1436	1083	841	668	540	443

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 1.5VLR-36 COMPOSITE DECK-SLABS LIGHT WEIGHT CONCRETE (110 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
3½"	2"	22	6'-11"	8'-2"	8'-3"	28.8	2.66	2.49	3.36
		20	8'-3"	9'-4"	9'-8"	29.2	2.87	2.94	3.36
		19	8'-11"	10'-2"	10'-6"	29.5	3.06	3.36	3.36
		18	9'-3"	10'-10"	11'-2"	29.8	3.22	3.73	3.36
		16	10'-0"	12'-2"	12'-0"	30.5	3.54	4.52	3.36
4"	2½"	22	6'-8"	7'-9"	7'-11"	33.4	3.85	2.86	3.91
		20	7'-10"	8'-11"	9'-3"	33.8	4.15	3.38	3.95
		19	8'-6"	9'-8"	10'-0"	34.1	4.42	3.87	3.95
		18	8'-10"	10'-5"	10'-9"	34.4	4.65	4.31	3.95
		16	9'-6"	11'-8"	11'-7"	35.1	5.11	5.24	3.95
4¾"	¾"	22	6'-4"	7'-4"	7'-6"	40.3	6.20	3.43	4.26
		20	7'-5"	8'-5"	8'-8"	40.7	6.68	4.07	4.76
		19	8'-1"	9'-2"	9'-6"	41.0	7.11	4.67	4.88
		18	8'-4"	9'-10"	10'-2"	41.3	7.47	5.21	4.88
		16	9'-0"	11'-1"	11'-1"	42.0	8.22	6.36	4.88

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf) LWC (110 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		4'-0"	5'-0"	6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"
3½"	22	1214	766	523	338	226	159	116	87	67
	20	1439	910	580	365	244	172	125	94	72
	19	1648	1044	619	389	261	183	133	100	77
	18	1648	1125	651	410	274	193	140	105	81
	16	1647	1239	717	451	302	212	154	116	89
4"	22	1396	881	601	433	323	230	168	126	97
	20	1658	1049	718	518	354	248	181	136	104
	19	1903	1205	826	563	377	264	193	145	111
	18	1938	1344	923	592	396	278	203	152	117
	16	1937	1542	1034	651	436	306	223	167	129
4¾"	22	1674	1057	722	519	388	298	234	186	150
	20	1995	1262	864	624	468	361	285	219	168
	19	2294	1453	997	721	542	420	310	233	179
	18	2398	1625	1116	808	609	448	326	245	189
	16	2397	1909	1371	996	701	492	359	269	207

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 1.5VLR-36 COMPOSITE DECK-SLABS

ASD

## 1.5VLR-36 Composite Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
<b>4D 65/60BG</b>					
<b>Normal Weight Concrete (145 pcf)</b>					
3½	2	0.92	0.018	6x6-W1.4xW1.4	23
4	2½	1.07	0.023	6x6-W1.4xW1.4	18
4½	3	1.22	0.027	6x6-W1.4xW1.4	15
5	3½	1.38	0.032	6x6-W2.1xW2.1	15
5½	4	1.53	0.036	6x6-W2.1xW2.1	15
6	4½	1.69	0.041	6x6-W2.1xW2.1	15
<b>Light Weight Concrete (110 pcf)</b>					
3½	2	0.92	0.018	6x6-W1.4xW1.4	33
4	2½	1.07	0.023	6x6-W1.4xW1.4	25
4½	3	1.22	0.027	6x6-W1.4xW1.4	20
4¾	3¼	1.30	0.029	6x6-W2.1xW2.1	20
5	3½	1.38	0.032	6x6-W2.1xW2.1	20
5¾	4¼	1.61	0.038	6x6-W2.1xW2.1	20

### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.


# 2VLI-36/2VLJ-36/2PLVLI-36 COMPOSITE DECKS

## GRADE 50 STEEL


ASD

### 2VLI COMPOSITE DECKS

- 2VLI-36 Deck used with TSWs or BPs
- 2VLJ-36 Deck used with Side-lap Screws
- 2PLVLI-36 Deck used with PunchLok® II System

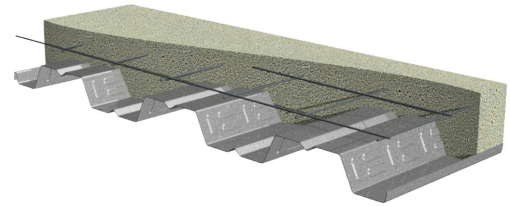

### Nominal Dimensions

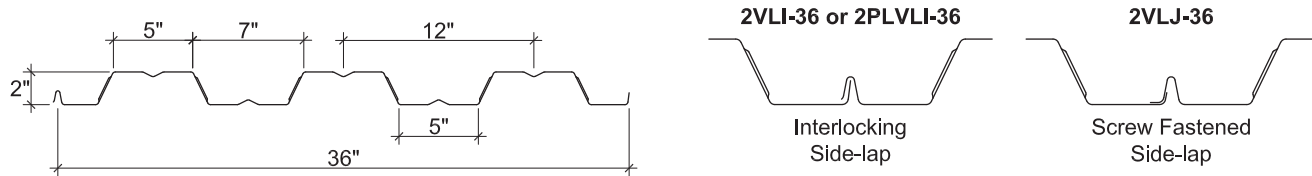

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_p)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.6	0.0295	50	0.324	0.324	0.244	0.255	609	637	1641
20	1.9	0.0358	50	0.409	0.407	0.326	0.337	813	841	2419
19	2.2	0.0418	50	0.490	0.488	0.409	0.421	1020	1050	2863
18	2.5	0.0474	50	0.557	0.557	0.485	0.500	1210	1247	3240
16	3.2	0.0598	50	0.703	0.703	0.643	0.652	1604	1627	4069

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1½"	2"	3"	4"	4"	6"	1½"	2"	3"	4"	4"	6"
22	363	399	460	511	767	882	362	390	437	476	924	1071
20	522	571	655	726	1098	1257	554	595	663	721	1342	1550
19	696	761	869	960	1462	1667	775	829	921	998	1805	2078
18	879	959	1092	1205	1843	2095	1013	1082	1198	1296	2292	2631
16	1354	1470	1666	1830	2825	3194	1654	1759	1936	2085	3554	4059

### Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer bottom optional
- ASTM A1008 SS GR50 Min. with gray primer bottom
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

### Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Factory Hanger Tabs

# 2VLI-36/2VLJ-36/2PLVLI-36 COMPOSITE DECK-SLABS

## NORMAL WEIGHT CONCRETE (145 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
4"	2"	22	7'-10"	9'-1"	9'-3"	37.9	4.14	2.41	3.03
		20	9'-5"	10'-5"	10'-9"	38.2	4.43	2.86	3.07
		19	10'-1"	11'-7"	12'-0"	38.5	4.68	3.27	3.07
		18	10'-6"	12'-8"	12'-7"	38.8	4.92	3.64	3.07
		16	11'-4"	14'-1"	13'-3"	39.5	5.39	4.43	3.07
5½"	3½"	22	6'-11"	7'-11"	8'-1"	56.0	10.32	3.46	3.84
		20	8'-3"	9'-2"	9'-5"	56.3	11.00	4.12	4.55
		19	9'-0"	10'-2"	10'-6"	56.6	11.60	4.73	4.67
		18	9'-4"	11'-1"	11'-6"	56.9	12.14	5.28	4.67
		16	10'-1"	12'-8"	12'-1"	57.6	13.25	6.47	4.67
6½"	4½"	22	6'-5"	7'-4"	7'-7"	68.1	16.78	4.40	4.44
		20	7'-8"	8'-6"	8'-9"	68.4	17.83	5.26	5.15
		19	8'-5"	9'-6"	9'-10"	68.7	18.77	6.05	5.55
		18	8'-9"	10'-4"	10'-8"	69.0	19.61	6.77	5.87
		16	9'-6"	11'-9"	11'-7"	69.7	21.36	7.91	5.87

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf)      NWC (145 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
4"	22	498	356	263	200	155	121	96	76	60
	20	597	428	319	244	190	145	111	88	70
	19	688	495	370	280	204	153	118	93	74
	18	770	555	416	294	214	161	124	97	78
	16	945	684	459	323	235	176	136	107	85
5½"	22	713	509	376	286	221	173	136	107	85
	20	859	616	458	350	273	216	172	138	111
	19	994	715	534	410	321	256	206	167	136
	18	1116	805	603	464	365	292	236	193	158
	16	1379	998	750	581	459	369	301	248	206
6½"	22	910	650	482	366	284	223	176	140	111
	20	1099	789	588	450	352	279	223	180	146
	19	1274	918	687	528	415	331	267	217	178
	18	1435	1036	777	599	472	378	307	251	207
	16	1688	1222	919	711	563	453	369	304	253

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 2VLI-36/2VLJ-36/2PLVLI-36 COMPOSITE DECK-SLABS

## LIGHT WEIGHT CONCRETE (110 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
4"	2"	22	8'-7"	9'-11"	10'-2"	29.1	3.19	2.31	2.65
		20	10'-5"	11'-4"	11'-9"	29.4	3.44	2.72	3.07
		19	11'-1"	12'-8"	13'-0"	29.7	3.66	3.10	3.07
		18	11'-5"	13'-9"	13'-5"	30.0	3.85	3.45	3.07
		16	12'-1"	15'-0"	14'-2"	30.7	4.25	4.17	3.07
4½"	2½"	22	8'-3"	9'-6"	9'-9"	33.7	4.44	2.64	2.84
		20	9'-11"	10'-11"	11'-3"	34.0	4.78	3.11	3.55
		19	10'-7"	12'-2"	12'-7"	34.3	5.08	3.55	3.57
		18	11'-0"	13'-3"	13'-0"	34.6	5.35	3.95	3.57
		16	11'-8"	14'-6"	13'-8"	35.3	5.89	4.79	3.57
5¼"	3¼"	22	7'-9"	8'-11"	9'-2"	40.6	6.89	3.16	3.15
		20	9'-4"	10'-3"	10'-7"	40.9	7.40	3.74	3.86
		19	10'-0"	11'-6"	11'-10"	41.2	7.86	4.27	4.26
		18	10'-5"	12'-6"	12'-5"	41.5	8.27	4.76	4.39
		16	11'-2"	13'-11"	13'-1"	42.2	9.09	5.79	4.39

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf) LWC (110 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		6'-0"	7'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"
4"	22	483	347	259	190	139	104	80	63	50
	20	575	414	293	205	150	112	86	68	54
	19	659	466	312	219	159	120	92	72	58
	18	735	491	329	231	168	126	97	76	61
	16	860	542	363	255	185	139	107	84	67
4½"	22	552	396	295	226	177	140	112	88	70
	20	658	474	355	273	208	156	120	95	76
	19	755	545	409	304	222	166	128	101	80
	18	843	610	456	320	233	175	135	106	85
	16	1029	747	503	353	257	193	149	117	93
5¼"	22	660	474	353	271	211	168	134	108	88
	20	789	569	426	328	258	206	166	136	111
	19	908	656	492	380	300	241	196	156	125
	18	1016	735	553	428	339	271	209	164	131
	16	1244	903	681	529	397	298	229	180	144

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 2VLI-36/2VLJ-36/2PLVLI-36 COMPOSITE DECK-SLABS

ASD

## 2VLI-36/2VLJ-36/2PLVLI-36 Composite Deck-Slab Information

$f'_c = 3000$  psi

### Recommended Reinforcing for Temperature and Shrinkage

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	WWR	(OR)	Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
						4D 65/60BG
<b>Normal Weight Concrete (145 pcf)</b>						
4	2	0.93	0.028	6x6-W1.4xW1.4		23
4½	2½	1.08	0.028	6x6-W1.4xW1.4		18
5	3	1.23	0.028	6x6-W1.4xW1.4		15
5½	3½	1.39	0.032	6x6-W2.1xW2.1		15
6	4	1.54	0.036	6x6-W2.1xW2.1		15
6½	4½	1.70	0.041	6x6-W2.1xW2.1		15
<b>Light Weight Concrete (110 pcf)</b>						
4	2	0.93	0.028	6x6-W1.4xW1.4		33
4½	2½	1.08	0.028	6x6-W1.4xW1.4		25
5	3	1.23	0.028	6x6-W1.4xW1.4		20
5¼	3¼	1.31	0.029	6x6-W2.1xW2.1		20
5½	3½	1.39	0.032	6x6-W2.1xW2.1		20
6¼	4¼	1.62	0.038	6x6-W2.1xW2.1		20

### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.


# 3VLI-36/3VLJ-36/3PLVLI-36 COMPOSITE DECKS

## GRADE 50 STEEL



ASD

### 3VLI COMPOSITE DECKS

- 3VLI-36 Deck used with TSWs or BPs
- 3VLJ-36 Deck used with Side-lap Screws
- 3PLVLI-36 Deck used with PunchLok® II System

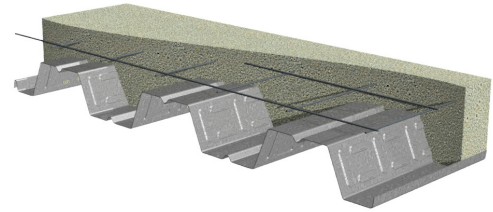

### Nominal Dimensions

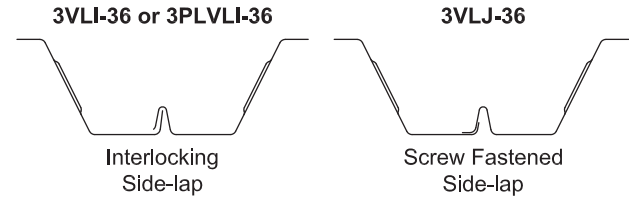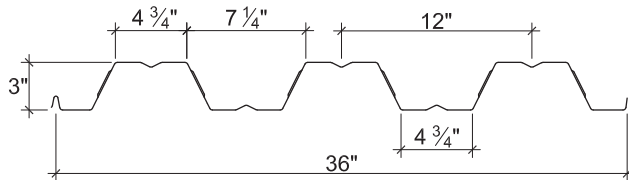

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.7	0.0295	50	0.732	0.737	0.387	0.410	966	1023	1407
20	2.1	0.0358	50	0.919	0.921	0.512	0.539	1277	1345	2485
19	2.4	0.0418	50	1.099	1.101	0.639	0.669	1595	1669	3389
18	2.7	0.0474	50	1.253	1.253	0.761	0.794	1899	1981	4361
16	3.5	0.0598	50	1.580	1.580	1.013	1.013	2528	2528	6126

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	353	388	446	496	783	910	333	359	402	439	910	1068
20	510	559	640	709	1121	1388	518	556	620	674	1328	1668
19	683	747	853	943	1493	1879	731	783	869	942	1792	2291
18	866	944	1075	1186	1881	2356	963	1028	1138	1231	2279	2900
16	1339	1455	1648	1811	2884	3579	1589	1690	1860	2003	3546	4474

### Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer bottom optional
- ASTM A1008 SS GR50 Min. with gray primer bottom
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

### Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Factory Hanger Tabs

# 3VLI-36/3VLJ-36/3PLVLI-36 COMPOSITE DECK-SLABS

## NORMAL WEIGHT CONCRETE (145 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
5"	2"	22	10'-0"	10'-9"	11'-1"	44.0	7.54	3.47	3.16
		20	11'-9"	12'-6"	12'-11"	44.4	8.04	4.13	3.74
		19	12'-3"	13'-11"	14'-5"	44.7	8.49	4.73	3.74
		18	12'-8"	15'-2"	14'-10"	45.0	8.89	5.28	3.74
		16	13'-4"	16'-8"	15'-8"	45.8	9.72	6.45	3.74
6½"	3½"	22	8'-10"	8'-7"	9'-9"	62.1	15.94	4.57	3.94
		20	10'-5"	11'-1"	11'-5"	62.5	16.93	5.45	4.93
		19	11'-4"	12'-4"	12'-9"	62.8	17.82	6.26	5.31
		18	11'-8"	13'-6"	13'-8"	63.1	18.62	7.00	5.31
		16	12'-4"	15'-2"	14'-6"	63.9	20.27	8.57	5.31
7½"	4½"	22	8'-3"	7'-6"	8'-6"	74.2	24.12	5.36	4.52
		20	9'-8"	10'-4"	10'-8"	74.6	25.57	6.40	5.51
		19	10'-9"	11'-7"	11'-11"	74.9	26.87	7.36	6.33
		18	11'-2"	12'-7"	13'-0"	75.2	28.04	8.24	6.47
		16	11'-10"	14'-3"	13'-11"	76.0	30.47	10.12	6.47

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf)      NWC (145 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"
5"	22	389	298	233	185	148	120	97	79	64
	20	471	363	285	228	184	150	124	102	84
	19	546	422	333	267	214	168	135	109	90
	18	615	476	377	291	224	176	141	115	94
	16	760	582	424	319	245	193	154	125	103
6½"	22	509	389	303	240	191	154	124	100	80
	20	618	475	373	297	240	195	159	131	107
	19	719	555	437	350	284	233	192	159	132
	18	811	627	496	399	325	268	222	185	155
	16	1007	782	622	502	412	341	286	240	204
7½"	22	595	455	354	280	223	179	144	116	93
	20	725	557	437	348	281	228	186	153	125
	19	845	651	513	411	333	273	225	186	155
	18	954	738	584	469	382	314	261	217	182
	16	1189	923	733	593	486	403	337	283	240

**Notes:**

- For high loads long term concrete creep should be considered.
- See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 3VLI-36/3VLJ-36/3PLVLI-36 COMPOSITE DECK-SLABS

## LIGHT WEIGHT CONCRETE (110 pcf)

ASD

			Maximum Unshored Spans			Composite Deck-Slab Properties			
Slab Depth		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in <sup>4</sup> /ft)	Moment $M_{no}/\Omega$ (kip-ft/ft)	Shear $V_{no}/\Omega$ (kip/ft)
Total	Topping		1	2	3				
5"	2"	22	11'-1"	11'-10"	12'-3"	33.8	5.75	3.33	2.69
		20	12'-7"	13'-8"	14'-2"	34.2	6.19	3.94	3.68
		19	13'-1"	15'-3"	15'-5"	34.5	6.59	4.51	3.74
		18	13'-6"	16'-8"	15'-10"	34.8	6.94	5.02	3.74
		16	14'-3"	17'-9"	16'-9"	35.6	7.66	6.11	3.74
5½"	2½"	22	10'-7"	11'-4"	11'-9"	38.4	7.51	3.66	2.88
		20	12'-2"	13'-2"	13'-7"	38.8	8.07	4.34	3.86
		19	12'-9"	14'-8"	14'-11"	39.1	8.57	4.97	4.24
		18	13'-2"	16'-0"	15'-5"	39.4	9.02	5.54	4.24
		16	13'-10"	17'-3"	16'-3"	40.2	9.93	6.74	4.24
6¼"	¾"	22	10'-0"	10'-9"	11'-1"	45.2	10.78	4.21	3.17
		20	11'-9"	12'-6"	12'-11"	45.6	11.57	5.00	4.16
		19	12'-3"	13'-11"	14'-4"	45.9	12.27	5.72	4.99
		18	12'-8"	15'-2"	14'-10"	46.2	12.89	6.38	5.04
		16	13'-4"	16'-7"	15'-8"	47.0	14.16	7.77	5.04

**Note:**

1. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

**Superimposed Allowable Load,  $W_n/\Omega$ , Limited by L/360 (psf) LWC (110 pcf),  $f'_c = 3000$  psi**

Total Slab Depth	Deck Gage	Span (ft-in.)								
		8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	13'-0"	14'-0"	15'-0"	16'-0"
5"	22	381	294	232	186	145	114	91	74	61
	20	458	355	270	203	156	123	98	80	66
	19	528	395	287	216	166	131	104	85	70
	18	592	416	303	227	175	138	110	89	74
	16	654	459	334	251	193	152	122	99	81
5½"	22	419	323	254	203	165	135	111	91	76
	20	504	390	308	248	202	160	128	104	86
	19	581	451	358	281	216	170	136	111	91
	18	652	507	394	296	228	179	143	116	96
	16	801	595	433	325	251	197	158	128	105
6¼"	22	481	370	291	233	188	154	126	104	86
	20	579	448	354	284	232	190	158	132	110
	19	669	518	411	332	271	224	187	157	130
	18	750	583	463	375	308	255	205	166	137
	16	924	720	574	464	358	281	225	183	151

**Notes:**

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Strength Web Based Solutions for alternate slabs or LRFD design.

# 3VLI-36/3VLJ-36/3PLVLI-36 COMPOSITE DECK-SLABS

ASD

## 3VLI-36/3VLJ-36/3PLVLI-36 Composite Deck-Slab Information

$f'_c = 3000$  psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd <sup>3</sup> /100 ft <sup>2</sup> )	Min. A <sub>s</sub> for T&S (in. <sup>2</sup> )	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd <sup>3</sup> )
<b>4D 65/60BG</b>					
<b>Normal Weight Concrete (145 pcf)</b>					
5	2	1.08	0.028	6x6-W1.4xW1.4	23
5½	2½	1.23	0.028	6x6-W1.4xW1.4	18
6	3	1.39	0.028	6x6-W1.4xW1.4	15
6½	3½	1.54	0.032	6x6-W2.1xW2.1	15
7	4	1.70	0.036	6x6-W2.1xW2.1	15
7½	4½	1.85	0.041	6x6-W2.1xW2.1	15
<b>Light Weight Concrete (110 pcf)</b>					
5	2	1.08	0.028	6x6-W1.4xW1.4	33
5½	2½	1.23	0.028	6x6-W1.4xW1.4	25
6	3	1.39	0.028	6x6-W1.4xW1.4	20
6¼	3¼	1.47	0.029	6x6-W2.1xW2.1	20
6½	3½	1.54	0.032	6x6-W2.1xW2.1	20
7¼	4¼	1.77	0.038	6x6-W2.1xW2.1	20


### Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or [infobuilding@bekaert.com](mailto:infobuilding@bekaert.com).


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it. DRAMIX is a registered trademark of Bekaert.

# NON-COMPOSITE DECK


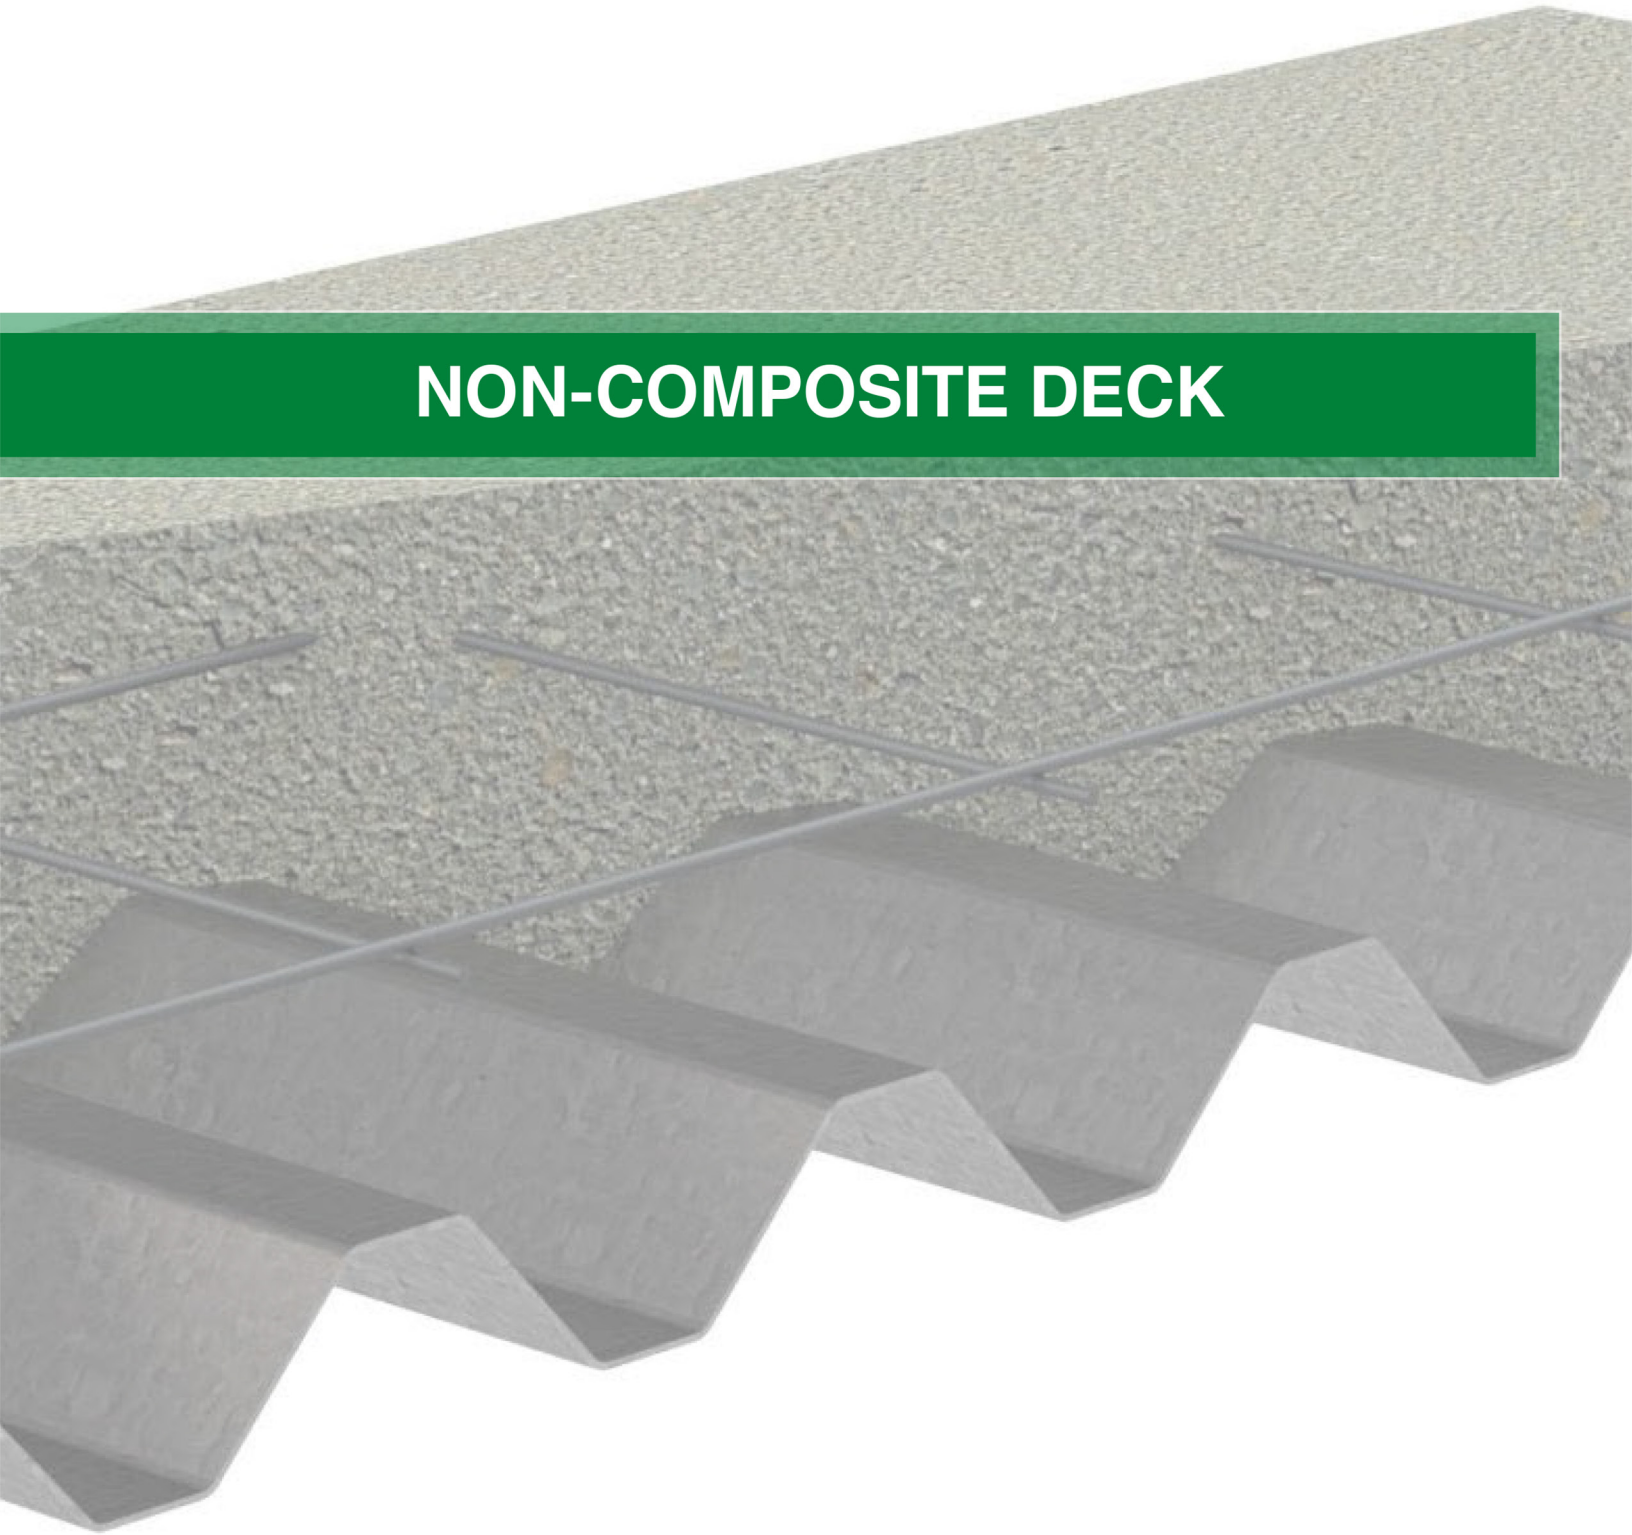


# 0.6C-30/0.6C-35 NON-COMPOSITE & ROOF DECKS GRADE 80 STEEL

ASD

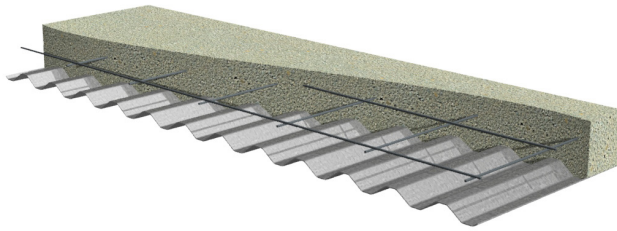

## Nominal Dimensions

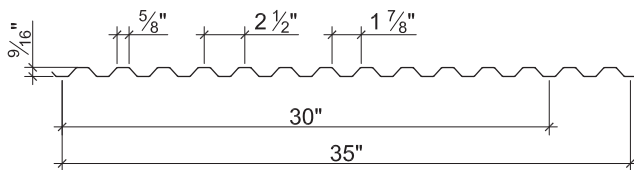

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
28	0.7	0.0149	60	0.011	0.011	0.033	0.034	99	102	1326
26	0.9	0.0179	60	0.013	0.013	0.042	0.042	126	126	1589
24	1.2	0.0239	60	0.017	0.017	0.056	0.056	168	168	2107
22	1.4	0.0295	60	0.021	0.021	0.069	0.068	207	204	2584

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs One-Flange Loading			
	End Bearing		Interior Bearing	
	1 1/2"	2"	1 1/2"	2"
28	491	527	567	604
26	690	738	834	885
24	1176	1251	1507	1589
22	1729	1830	2295	2409

## Standard Features

- ASTM A653 SS GR80 with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI NC-2017 and RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Side-lap or bottom flange slot venting

# 0.6C-30/0.6C-35 NON-COMPOSITE & ROOF DECKS GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			1'-0"	1'-6"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"
28	Single	$W_n / \Omega$	790	351	198	126	88	65	49	39	32	26	22
		L/240	721	214	90	46	27	17	11	8	6	4	3
	Double	$W_n / \Omega$	760	351	200	129	90	66	51	40	32	27	23
		L/240	---	---	---	111	64	41	27	19	14	10	8
	Triple	$W_n / \Omega$	925	433	248	160	112	82	63	50	41	34	28
		L/240	---	403	170	87	50	32	21	15	11	8	6
26	Single	$W_n / \Omega$	1006	447	251	161	112	82	63	50	40	33	28
		L/240	852	253	107	55	32	20	13	9	7	5	4
	Double	$W_n / \Omega$	935	432	247	159	111	82	63	49	40	33	28
		L/240	---	---	---	131	76	48	32	23	16	12	10
	Triple	$W_n / \Omega$	1136	533	306	198	138	102	78	62	50	41	35
		L/240	---	477	201	103	60	38	25	18	13	10	7
24	Single	$W_n / \Omega$	1341	596	335	215	149	109	84	66	54	44	37
		L/240	1114	330	139	71	41	26	17	12	9	7	5
	Double	$W_n / \Omega$	1246	576	329	212	148	109	83	66	53	44	37
		L/240	---	---	---	172	99	63	42	29	21	16	12
	Triple	$W_n / \Omega$	1513	710	408	264	184	136	104	82	67	55	46
		L/240	---	623	263	135	78	49	33	23	17	13	10
22	Single	$W_n / \Omega$	1653	735	413	264	184	135	103	82	66	55	46
		L/240	1377	408	172	88	51	32	22	15	11	8	6
	Double	$W_n / \Omega$	1515	700	400	257	179	132	101	80	65	54	45
		L/240	---	---	---	212	123	77	52	36	27	20	15
	Triple	$W_n / \Omega$	1841	863	495	320	223	165	126	100	81	67	56
		L/240	---	770	325	166	96	61	41	29	21	16	12



### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 0.6C-36 NON-COMPOSITE & ROOF DECKS GRADE 80 STEEL

ASD

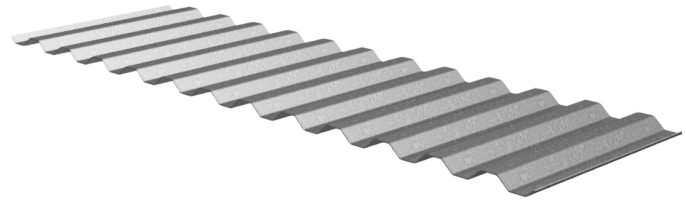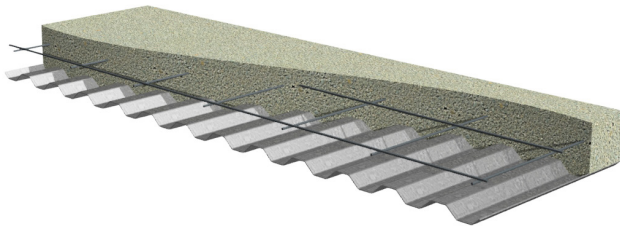

## Nominal Dimensions

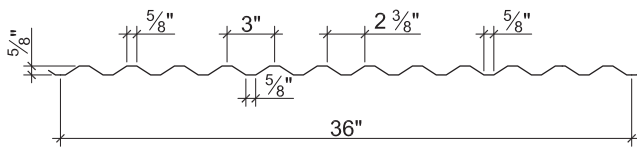

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
28	0.7	0.0149	60	0.012	0.012	0.034	0.035	102	105	1191
26	0.9	0.0179	60	0.015	0.015	0.043	0.043	129	129	1719
24	1.1	0.0239	60	0.020	0.020	0.058	0.058	174	174	2391
22	1.4	0.0295	60	0.023	0.023	0.071	0.071	213	213	2943

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs One-Flange Loading			
	End Bearing		Interior Bearing	
	1 1/2"	2"	1 1/2"	2"
28	348	387	469	515
26	490	543	676	740
24	833	919	1186	1292
22	1227	1349	1782	1933

## Standard Features

- ASTM A653 SS GR80 with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI NC-2017 and RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Side-lap or bottom flange slot venting

# 0.6C-36 NON-COMPOSITE & ROOF DECKS GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			1'-0"	1'-6"	2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"
28	Single	$W_n / \Omega$	814	362	204	130	90	66	51	40	33	27	23
		L/240	787	233	98	50	29	18	12	9	6	5	4
	Double	$W_n / \Omega$	767	358	205	132	92	68	52	41	33	28	23
		L/240	---	---	---	121	70	44	30	21	15	11	9
	Triple	$W_n / \Omega$	927	439	253	164	115	85	65	51	42	34	29
		L/240	---	---	186	95	55	35	23	16	12	9	7
26	Single	$W_n / \Omega$	1030	458	257	165	114	84	64	51	41	34	29
		L/240	983	291	123	63	36	23	15	11	8	6	5
	Double	$W_n / \Omega$	965	444	253	163	114	84	64	51	41	34	29
		L/240	---	---	---	152	88	55	37	26	19	14	11
	Triple	$W_n / \Omega$	1174	548	314	203	141	104	80	63	51	42	36
		L/240	---	---	232	119	69	43	29	20	15	11	9
24	Single	$W_n / \Omega$	1389	617	347	222	154	113	87	69	56	46	39
		L/240	1311	388	164	84	49	31	20	14	10	8	6
	Double	$W_n / \Omega$	1306	600	342	220	153	113	86	68	55	46	39
		L/240	---	---	---	202	117	74	49	35	25	19	15
	Triple	$W_n / \Omega$	1592	741	424	274	191	141	108	85	69	57	48
		L/240	---	733	309	158	92	58	39	27	20	15	11
22	Single	$W_n / \Omega$	1701	756	425	272	189	139	106	84	68	56	47
		L/240	1508	447	188	96	56	35	24	17	12	9	7
	Double	$W_n / \Omega$	1599	735	418	269	188	138	106	84	68	56	47
		L/240	---	---	---	232	135	85	57	40	29	22	17
	Triple	$W_n / \Omega$	1950	908	519	335	234	172	132	104	85	70	59
		L/240	---	843	356	182	105	66	44	31	23	17	13



### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.0C-32 NON-COMPOSITE & ROOF DECK GRADE 80 STEEL

ASD

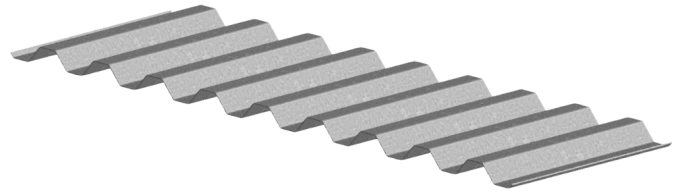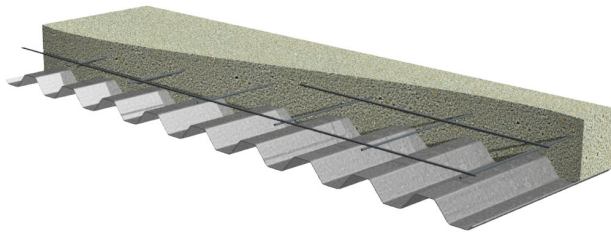

## Nominal Dimensions

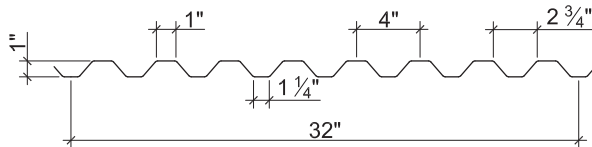

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
26	0.9	0.0179	60	0.041	0.043	0.067	0.071	201	213	1673
24	1.2	0.0239	60	0.057	0.058	0.098	0.103	293	308	2922
22	1.5	0.0295	60	0.071	0.071	0.130	0.134	389	401	3598
20	1.9	0.0358	60	0.090	0.090	0.168	0.166	503	497	4353

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs					
	One-Flange Loading					
	End Bearing			Interior Bearing		
	1 1/2"	2"	3"	1 1/2"	2"	3"
26	479	530	617	724	792	906
24	815	899	1039	1250	1361	1547
22	1198	1317	1516	1856	2014	2278
20	1707	1870	2144	2668	2884	3247

## Standard Features

- ASTM A653 SS GR80 with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI NC-2017 and RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Side-lap or bottom flange slot venting

# 1.0C-32 NON-COMPOSITE & ROOF DECK GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"
26	Single	$W_n / \Omega$	401	257	178	131	100	79	64	53	45	38	33
		L/240	336	172	100	63	42	29	22	16	12	10	8
	Double	$W_n / \Omega$	405	264	185	137	105	83	67	56	47	40	35
		L/240	---	---	---	---	---	75	54	41	31	25	20
	Triple	$W_n / \Omega$	497	325	229	170	131	103	84	70	59	50	43
		L/240	---	---	197	124	83	58	43	32	25	19	16
24	Single	$W_n / \Omega$	587	376	261	192	147	116	94	78	65	56	48
		L/240	467	239	138	87	58	41	30	22	17	14	11
	Double	$W_n / \Omega$	596	386	270	199	153	121	98	81	68	58	50
		L/240	---	---	---	---	143	101	73	55	42	33	27
	Triple	$W_n / \Omega$	735	478	335	248	190	151	122	101	85	73	63
		L/240	---	459	266	167	112	79	57	43	33	26	21
22	Single	$W_n / \Omega$	778	498	346	254	195	154	125	103	86	74	64
		L/240	582	298	172	109	73	51	37	28	22	17	14
	Double	$W_n / \Omega$	773	501	351	259	199	157	128	106	89	76	65
		L/240	---	---	---	---	175	123	90	67	52	41	33
	Triple	$W_n / \Omega$	951	620	435	322	247	196	159	132	111	94	82
		L/240	---	562	325	205	137	96	70	53	41	32	26
20	Single	$W_n / \Omega$	1006	644	447	328	251	199	161	133	112	95	82
		L/240	738	378	219	138	92	65	47	35	27	21	17
	Double	$W_n / \Omega$	956	620	434	320	246	195	158	131	110	94	81
		L/240	---	---	---	---	222	156	114	85	66	52	41
	Triple	$W_n / \Omega$	1175	767	538	398	306	243	197	163	137	117	101
		L/240	---	713	413	260	174	122	89	67	52	41	32


### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.0C-33 NON-COMPOSITE DECK & ROOF DECK GRADE 80 STEEL

ASD

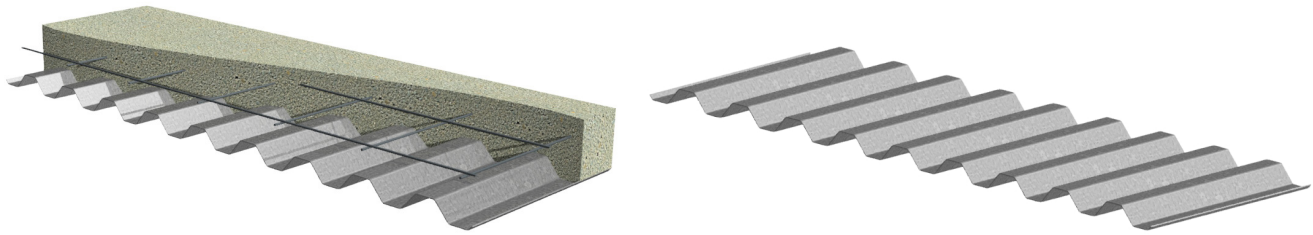

## Nominal Dimensions

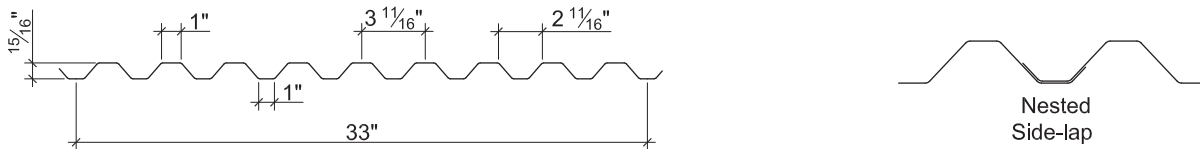

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
26	0.9	0.0179	60	0.036	0.036	0.065	0.068	195	204	1606
24	1.2	0.0239	60	0.050	0.049	0.096	0.097	287	290	2131
22	1.5	0.0295	60	0.062	0.062	0.121	0.120	362	359	2613
20	1.8	0.0358	60	0.076	0.076	0.147	0.146	440	437	3148

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs One-Flange Loading					
	End Bearing			Interior Bearing		
	1 1/2"	2"	3"	1 1/2"	2"	3"
26	482	534	572	509	557	592
24	832	917	978	965	1050	1111
22	1232	1354	1437	1508	1636	1723
20	1769	1938	2046	2256	2439	2556

## Standard Features

- ASTM A653 SS GR80 with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI NC-2017 and RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Side-lap or bottom flange slot venting

# 1.0C-33 NON-COMPOSITE & ROOF DECK GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"
26	Single	$W_n / \Omega$	389	249	173	127	97	77	62	51	43	37	32
		L/240	295	151	87	55	37	26	19	14	11	9	7
	Double	$W_n / \Omega$	388	253	177	131	101	80	65	53	45	38	33
		L/240	---	---	---	---	89	62	45	34	26	21	17
	Triple	$W_n / \Omega$	476	312	219	162	125	99	81	67	56	48	41
		L/240	---	285	165	104	70	49	36	27	21	16	13
24	Single	$W_n / \Omega$	575	368	255	188	144	114	92	76	64	54	47
		L/240	410	210	121	76	51	36	26	20	15	12	10
	Double	$W_n / \Omega$	550	359	252	186	143	113	92	76	64	55	47
		L/240	---	---	---	180	121	85	62	47	36	28	23
	Triple	$W_n / \Omega$	672	442	311	231	178	141	115	95	80	68	59
		L/240	---	388	225	141	95	67	49	36	28	22	18
22	Single	$W_n / \Omega$	725	464	322	237	181	143	116	96	81	69	59
		L/240	508	260	151	95	64	45	33	24	19	15	12
	Double	$W_n / \Omega$	680	443	311	230	177	140	114	94	79	68	58
		L/240	---	---	---	228	153	107	78	59	45	36	29
	Triple	$W_n / \Omega$	830	546	385	285	220	175	142	117	99	84	73
		L/240	---	491	284	179	120	84	61	46	36	28	22
20	Single	$W_n / \Omega$	880	563	391	287	220	174	141	116	98	83	72
		L/240	623	319	185	116	78	55	40	30	23	18	15
	Double	$W_n / \Omega$	826	539	379	280	215	171	139	115	96	82	71
		L/240	---	---	---	280	188	132	96	72	56	44	35
	Triple	$W_n / \Omega$	1009	664	468	347	267	212	172	143	120	103	89
		L/240	---	602	348	219	147	103	75	57	44	34	27



### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.0C-36 NON-COMPOSITE & ROOF DECK GRADE 80 STEEL

ASD

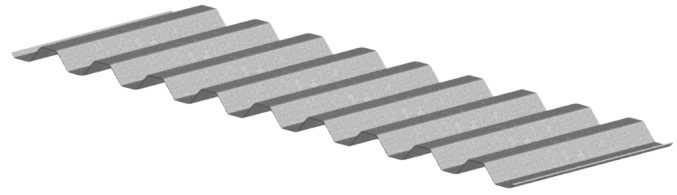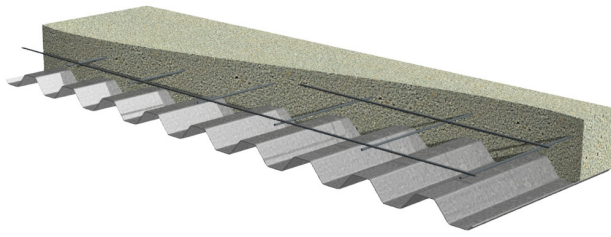

## Nominal Dimensions

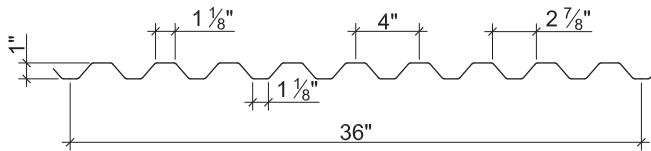

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
26	0.9	0.0179	60	0.039	0.039	0.065	0.068	195	204	1656
24	1.2	0.0239	60	0.057	0.057	0.099	0.103	296	308	2754
22	1.5	0.0295	60	0.070	0.070	0.129	0.131	386	392	3389
20	1.8	0.0358	60	0.083	0.083	0.160	0.160	479	479	4100

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs One-Flange Loading					
	End Bearing			Interior Bearing		
	1 1/2"	2"	3"	1 1/2"	2"	3"
26	464	514	598	658	720	825
24	792	873	1010	1154	1257	1429
22	1167	1283	1477	1730	1877	2122
20	1665	1824	2091	2504	2707	3047

## Standard Features

- ASTM A653 SS GR80 with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI NC-2017 and RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Side-lap or bottom flange slot venting

# 1.0C-36 NON-COMPOSITE & ROOF DECK GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			2'-0"	2'-6"	3'-0"	3'-6"	4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"
26	Single	$W_n / \Omega$	389	249	173	127	97	77	62	51	43	37	32
		L/240	320	164	95	60	40	28	20	15	12	9	7
	Double	$W_n / \Omega$	389	253	177	131	101	80	65	54	45	38	33
		L/240	---	---	---	---	96	68	49	37	29	22	18
	Triple	$W_n / \Omega$	478	312	220	163	125	99	81	67	56	48	41
		L/240	---	309	179	113	75	53	39	29	22	18	14
24	Single	$W_n / \Omega$	593	379	263	194	148	117	95	78	66	56	48
		L/240	467	239	138	87	58	41	30	22	17	14	11
	Double	$W_n / \Omega$	594	385	269	199	153	121	98	81	68	58	50
		L/240	---	---	---	---	141	99	72	54	42	33	26
	Triple	$W_n / \Omega$	731	477	334	247	190	151	122	101	85	73	63
		L/240	---	452	261	165	110	77	56	42	33	26	21
22	Single	$W_n / \Omega$	772	494	343	252	193	153	124	102	86	73	63
		L/240	574	294	170	107	72	50	37	28	21	17	13
	Double	$W_n / \Omega$	754	489	342	253	194	154	125	103	87	74	64
		L/240	---	---	---	---	173	121	88	66	51	40	32
	Triple	$W_n / \Omega$	926	605	425	314	242	191	155	129	108	92	80
		L/240	---	554	321	202	135	95	69	52	40	32	25
20	Single	$W_n / \Omega$	958	613	426	313	240	189	153	127	106	91	78
		L/240	680	348	202	127	85	60	44	33	25	20	16
	Double	$W_n / \Omega$	920	597	418	309	237	188	152	126	106	90	78
		L/240	---	---	---	306	205	144	105	79	61	48	38
	Triple	$W_n / \Omega$	1130	738	518	383	295	234	190	157	132	113	97
		L/240	---	657	380	240	161	113	82	62	48	37	30


### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.3C-32 NON-COMPOSITE DECK & ROOF DECK GRADE 80 STEEL

ASD

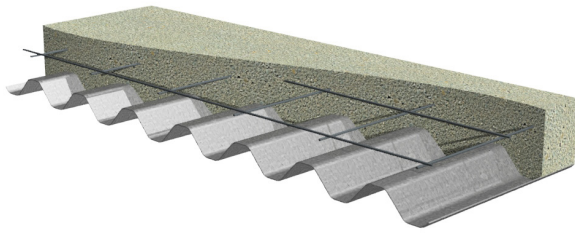

## Nominal Dimensions

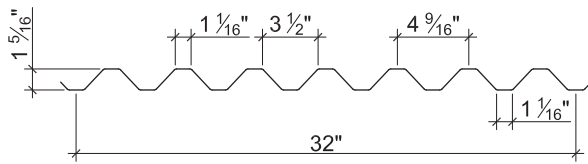

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 60$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
26	0.9	0.0179	60	0.067	0.067	0.080	0.089	240	266	1422
24	1.3	0.0239	60	0.093	0.092	0.126	0.130	377	389	2538
22	1.6	0.0295	60	0.116	0.116	0.163	0.163	488	488	3481
20	1.9	0.0358	60	0.139	0.139	0.197	0.197	590	590	4211

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs One-Flange Loading					
	End Bearing			Interior Bearing		
	1 1/2"	2"	3"	1 1/2"	2"	3"
26	353	391	454	393	430	492
24	614	677	783	746	812	923
22	915	1006	1158	1166	1265	1431
20	1318	1444	1656	1744	1885	2122

## Standard Features

- ASTM A653 SS GR80 with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-652 and UL Listed
- Tables conform to ANSI/SDI NC-2017 and RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Side-lap or bottom flange slot venting

# 1.3C-32 NON-COMPOSITE DECK & ROOF DECK GRADE 80 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	9'-0"	10'-0"
26	Single	$W_n / \Omega$	120	95	77	63	53	45	39	34	30	24	19
		$L/240$	69	48	35	26	20	16	13	10	9	6	4
	Double	$W_n / \Omega$	130	103	84	69	59	50	43	38	33	26	21
		$L/240$	---	---	---	64	49	39	31	25	21	15	11
	Triple	$W_n / \Omega$	160	128	104	86	73	62	54	47	41	33	26
		$L/240$	130	91	66	50	38	30	24	20	16	11	8
24	Single	$W_n / \Omega$	189	149	121	100	84	71	62	54	47	37	30
		$L/240$	95	67	49	37	28	22	18	14	12	8	6
	Double	$W_n / \Omega$	191	152	123	102	86	73	63	55	48	38	31
		$L/240$	---	---	116	87	67	53	42	34	28	20	15
	Triple	$W_n / \Omega$	237	188	153	127	107	91	79	69	60	48	39
		$L/240$	178	125	91	68	53	41	33	27	22	16	11
22	Single	$W_n / \Omega$	244	193	156	129	108	92	80	69	61	48	39
		$L/240$	119	83	61	46	35	28	22	18	15	10	8
	Double	$W_n / \Omega$	240	191	155	128	108	92	79	69	61	48	39
		$L/240$	---	---	147	110	85	67	53	43	36	25	18
	Triple	$W_n / \Omega$	298	237	193	159	134	115	99	86	76	60	49
		$L/240$	224	158	115	86	66	52	42	34	28	20	14
20	Single	$W_n / \Omega$	295	233	189	156	131	112	96	84	74	58	47
		$L/240$	142	100	73	55	42	33	27	22	18	12	9
	Double	$W_n / \Omega$	290	230	187	155	130	111	96	84	73	58	47
		$L/240$	---	---	176	132	102	80	64	52	43	30	22
	Triple	$W_n / \Omega$	361	286	233	193	162	138	120	104	92	73	59
		$L/240$	269	189	138	103	80	63	50	41	34	24	17


### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.5C-36 NON-COMPOSITE DECK GRADE 50 STEEL

ASD

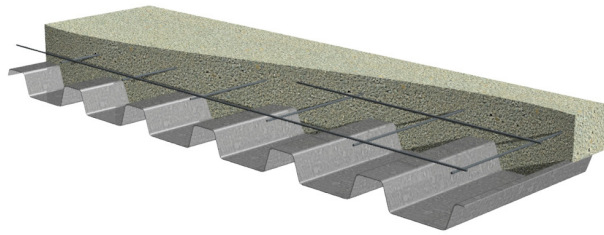

## Nominal Dimensions

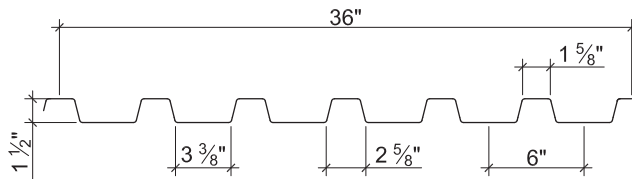

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
24	1.3	0.0239	60	0.138	0.118	0.131	0.120	392	359	1551
22	1.6	0.0295	50	0.178	0.155	0.179	0.169	447	422	2654
20	2.0	0.0358	50	0.217	0.197	0.229	0.224	571	559	3207
18	2.6	0.0474	50	0.290	0.277	0.318	0.306	793	763	4209

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
24	657	724	837	918	1197	1300	639	691	778	840	1460	1594
22	807	887	1021	1115	1482	1602	842	908	1017	1093	1834	1994
20	1153	1263	1448	1574	2127	2289	1274	1368	1525	1632	2662	2881
18	1931	2105	2398	2588	3586	3831	2297	2454	2716	2887	4546	4884

## Standard Features

- ASTM A653 SS GR50 Min. with G60 -SS GR80 ( $F_y=60$ ) for 24 gage
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI NC-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- 24ga cover width varies by producing division
- Contact Vulcraft for more information

# 1.5C-36 NON-COMPOSITE DECK GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	4'-6"	5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	9'-0"	10'-0"
24	Single	$W_n / \Omega$	196	155	126	104	87	74	64	56	49	39	31
		L/240	141	99	72	54	42	33	26	21	18	12	9
	Double	$W_n / \Omega$	173	137	112	93	78	67	58	50	44	35	29
		L/240	---	---	---	---	---	---	54	44	36	26	19
	Triple	$W_n / \Omega$	212	170	138	115	97	83	72	63	55	44	36
		L/240	---	160	117	88	68	53	43	35	29	20	15
22	Single	$W_n / \Omega$	223	176	143	118	99	85	73	64	56	44	36
		L/240	182	128	93	70	54	42	34	28	23	16	12
	Double	$W_n / \Omega$	207	164	133	110	93	79	68	60	52	41	34
		L/240	---	---	---	---	---	---	---	58	48	34	24
	Triple	$W_n / \Omega$	256	204	166	137	116	99	85	74	65	52	42
		L/240	---	---	153	115	89	70	56	45	37	26	19
20	Single	$W_n / \Omega$	286	226	183	151	127	108	93	81	71	56	46
		L/240	222	156	114	86	66	52	41	34	28	20	14
	Double	$W_n / \Omega$	273	217	176	146	123	105	91	79	69	55	45
		L/240	---	---	---	---	---	---	---	74	61	43	31
	Triple	$W_n / \Omega$	338	269	219	181	153	131	113	98	87	69	56
		L/240	---	268	195	147	113	89	71	58	48	33	24
18	Single	$W_n / \Omega$	397	313	254	210	176	150	130	113	99	78	63
		L/240	297	209	152	114	88	69	55	45	37	26	19
	Double	$W_n / \Omega$	372	296	240	199	168	143	124	108	95	75	61
		L/240	---	---	---	---	---	---	---	104	85	60	44
	Triple	$W_n / \Omega$	460	366	298	248	209	178	154	134	118	94	76
		L/240	---	---	274	206	159	125	100	81	67	47	34



### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2C-36 NON-COMPOSITE DECK GRADE 50 STEEL

ASD

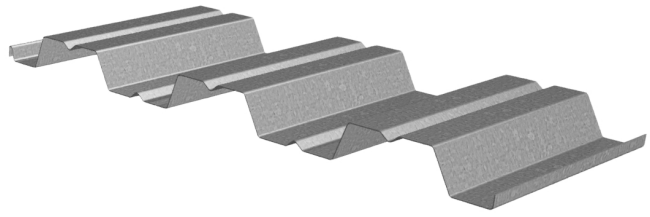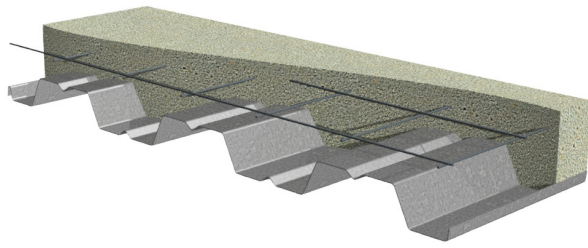

## Nominal Dimensions

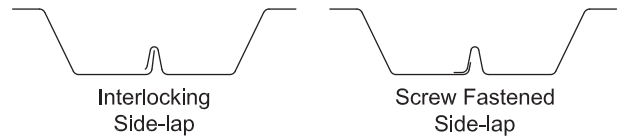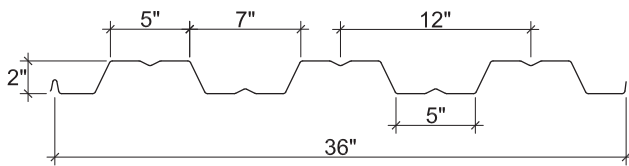

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.6	0.0295	50	0.324	0.324	0.244	0.255	609	637	1641
20	1.9	0.0358	50	0.409	0.407	0.326	0.337	813	841	2419
18	2.5	0.0474	50	0.557	0.557	0.485	0.500	1210	1247	3240
16	3.2	0.0598	50	0.703	0.703	0.643	0.652	1604	1627	4069

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1½"	2"	3"	4"	4"	6"	1½"	2"	3"	4"	4"	6"
22	363	399	460	511	767	882	362	390	437	476	924	1071
20	522	571	655	726	1098	1257	554	595	663	721	1342	1550
18	879	959	1092	1205	1843	2095	1013	1082	1198	1296	2292	2631
16	1354	1470	1666	1830	2825	3194	1654	1759	1936	2085	3554	4059

## Standard Features

- ASTM A653 SS GR50 Min. with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-652 and UL Listed
- Tables conform to ANSI/SDI NC-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Factory Hanger Tabs

# 2C-36 NON-COMPOSITE DECK GRADE 50 STEEL

ASD

## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			5'-0"	5'-6"	6'-0"	6'-6"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	10'-0"	11'-0"
22	Single	$W_n / \Omega$	195	161	135	115	99	87	76	67	60	49	40
		L/240	170	128	98	77	62	50	41	35	29	21	16
	Double	$W_n / \Omega$	190	159	135	115	100	88	77	69	61	50	41
		L/240	---	---	---	---	---	---	---	---	---	---	38
	Triple	$W_n / \Omega$	231	194	165	142	123	108	95	85	76	62	51
		L/240	---	---	---	---	117	95	78	65	55	40	30
20	Single	$W_n / \Omega$	260	215	181	154	133	116	102	90	80	65	54
		L/240	214	161	124	98	78	64	52	44	37	27	20
	Double	$W_n / \Omega$	254	212	179	154	133	116	103	91	82	66	55
		L/240	---	---	---	---	---	---	---	---	---	64	48
	Triple	$W_n / \Omega$	310	260	221	189	164	144	127	113	101	82	68
		L/240	---	---	---	183	147	119	98	82	69	50	38
18	Single	$W_n / \Omega$	387	320	269	229	198	172	151	134	120	97	80
		L/240	292	219	169	133	106	87	71	59	50	37	27
	Double	$W_n / \Omega$	372	311	264	226	196	172	152	135	120	98	81
		L/240	---	---	---	---	---	---	---	---	---	88	66
	Triple	$W_n / \Omega$	453	380	323	278	242	212	187	167	149	122	101
		L/240	---	---	319	251	201	163	135	112	95	69	52
16	Single	$W_n / \Omega$	513	424	356	304	262	228	201	178	158	128	106
		L/240	369	277	213	168	134	109	90	75	63	46	35
	Double	$W_n / \Omega$	483	404	343	294	255	224	197	175	157	128	106
		L/240	---	---	---	---	---	---	---	---	152	111	83
	Triple	$W_n / \Omega$	587	493	420	361	314	275	243	217	194	158	131
		L/240	---	---	403	317	254	206	170	142	119	87	65



### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol "---" indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.



NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3C-36 NON-COMPOSITE DECK GRADE 50 STEEL

ASD

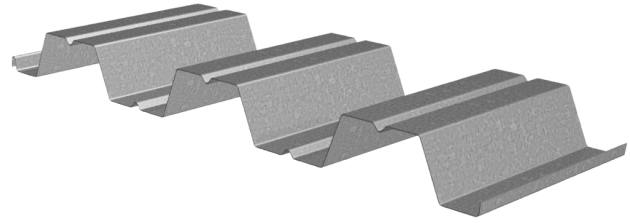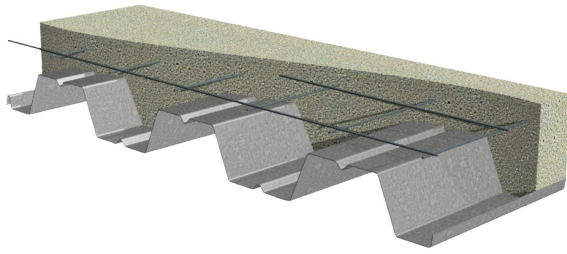

## Nominal Dimensions

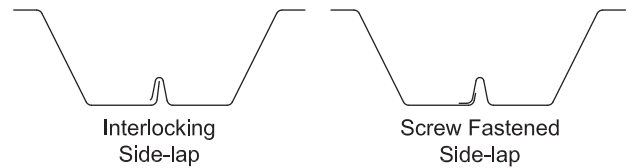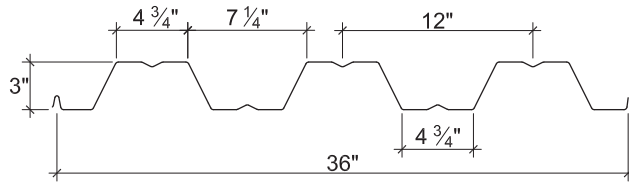

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
22	1.7	0.0295	50	0.732	0.737	0.387	0.410	966	1023	1407
20	2.1	0.0358	50	0.919	0.921	0.512	0.539	1277	1345	2485
18	2.7	0.0474	50	1.253	1.253	0.761	0.794	1899	1981	4361
16	3.5	0.0598	50	1.580	1.580	1.013	1.013	2528	2528	6126

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	353	388	446	496	783	910	333	359	402	439	910	1068
20	510	559	640	709	1121	1388	518	556	620	674	1328	1668
18	866	944	1075	1186	1881	2356	963	1028	1138	1231	2279	2900
16	1339	1455	1648	1811	2884	3579	1589	1690	1860	2003	3546	4474

## Standard Features

- ASTM A653 SS GR50 Min. with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-652 and UL Listed
- Tables conform to ANSI/SDI NC-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic and painted finishes
- Factory Hanger Tabs

# 3C-36 NON-COMPOSITE DECK GRADE 50 STEEL

ASD


## Inward Uniform Allowable Loads, ASD (psf)

Deck Gage	Spans	Criteria	Span (ft-in.)										
			6'-0"	7'-0"	7'-6"	8'-0"	8'-6"	9'-0"	9'-6"	10'-0"	11'-0"	12'-0"	13'-0"
22	Single	$W_n / \Omega$	215	158	137	121	107	95	86	77	64	54	46
		L/240	---	140	114	94	78	66	56	48	36	28	22
	Double	$W_n / \Omega$	194	148	131	116	104	94	85	77	64	54	47
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	230	177	157	140	126	114	103	94	79	67	57
		L/240	---	---	---	---	---	---	---	91	69	53	42
20	Single	$W_n / \Omega$	284	209	182	160	141	126	113	102	84	71	60
		L/240	279	176	143	118	98	83	70	60	45	35	27
	Double	$W_n / \Omega$	272	205	180	159	142	127	115	104	86	73	62
		L/240	---	---	---	---	---	---	---	---	---	---	---
	Triple	$W_n / \Omega$	329	249	219	195	174	156	141	128	107	90	77
		L/240	---	---	---	---	---	---	133	114	86	66	52
18	Single	$W_n / \Omega$	422	310	270	237	210	188	168	152	126	105	90
		L/240	380	239	195	160	134	113	96	82	62	48	37
	Double	$W_n / \Omega$	412	308	270	238	212	190	171	155	128	108	92
		L/240	---	---	---	---	---	---	---	---	---	---	90
	Triple	$W_n / \Omega$	501	377	331	293	261	234	211	191	159	134	115
		L/240	---	---	---	---	253	213	181	155	117	90	71
16	Single	$W_n / \Omega$	562	413	359	316	280	250	224	202	167	140	120
		L/240	480	302	246	202	169	142	121	104	78	60	47
	Double	$W_n / \Omega$	531	396	347	306	272	243	219	198	164	138	118
		L/240	---	---	---	---	---	---	---	---	---	---	114
	Triple	$W_n / \Omega$	649	486	427	377	336	301	271	245	204	172	147
		L/240	---	---	---	---	318	268	228	196	147	113	89

### Notes:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.
2. The symbol “---” indicates that the uniform allowable load based on deflection exceeds the allowable load based on stress.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided “AS IS”. Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

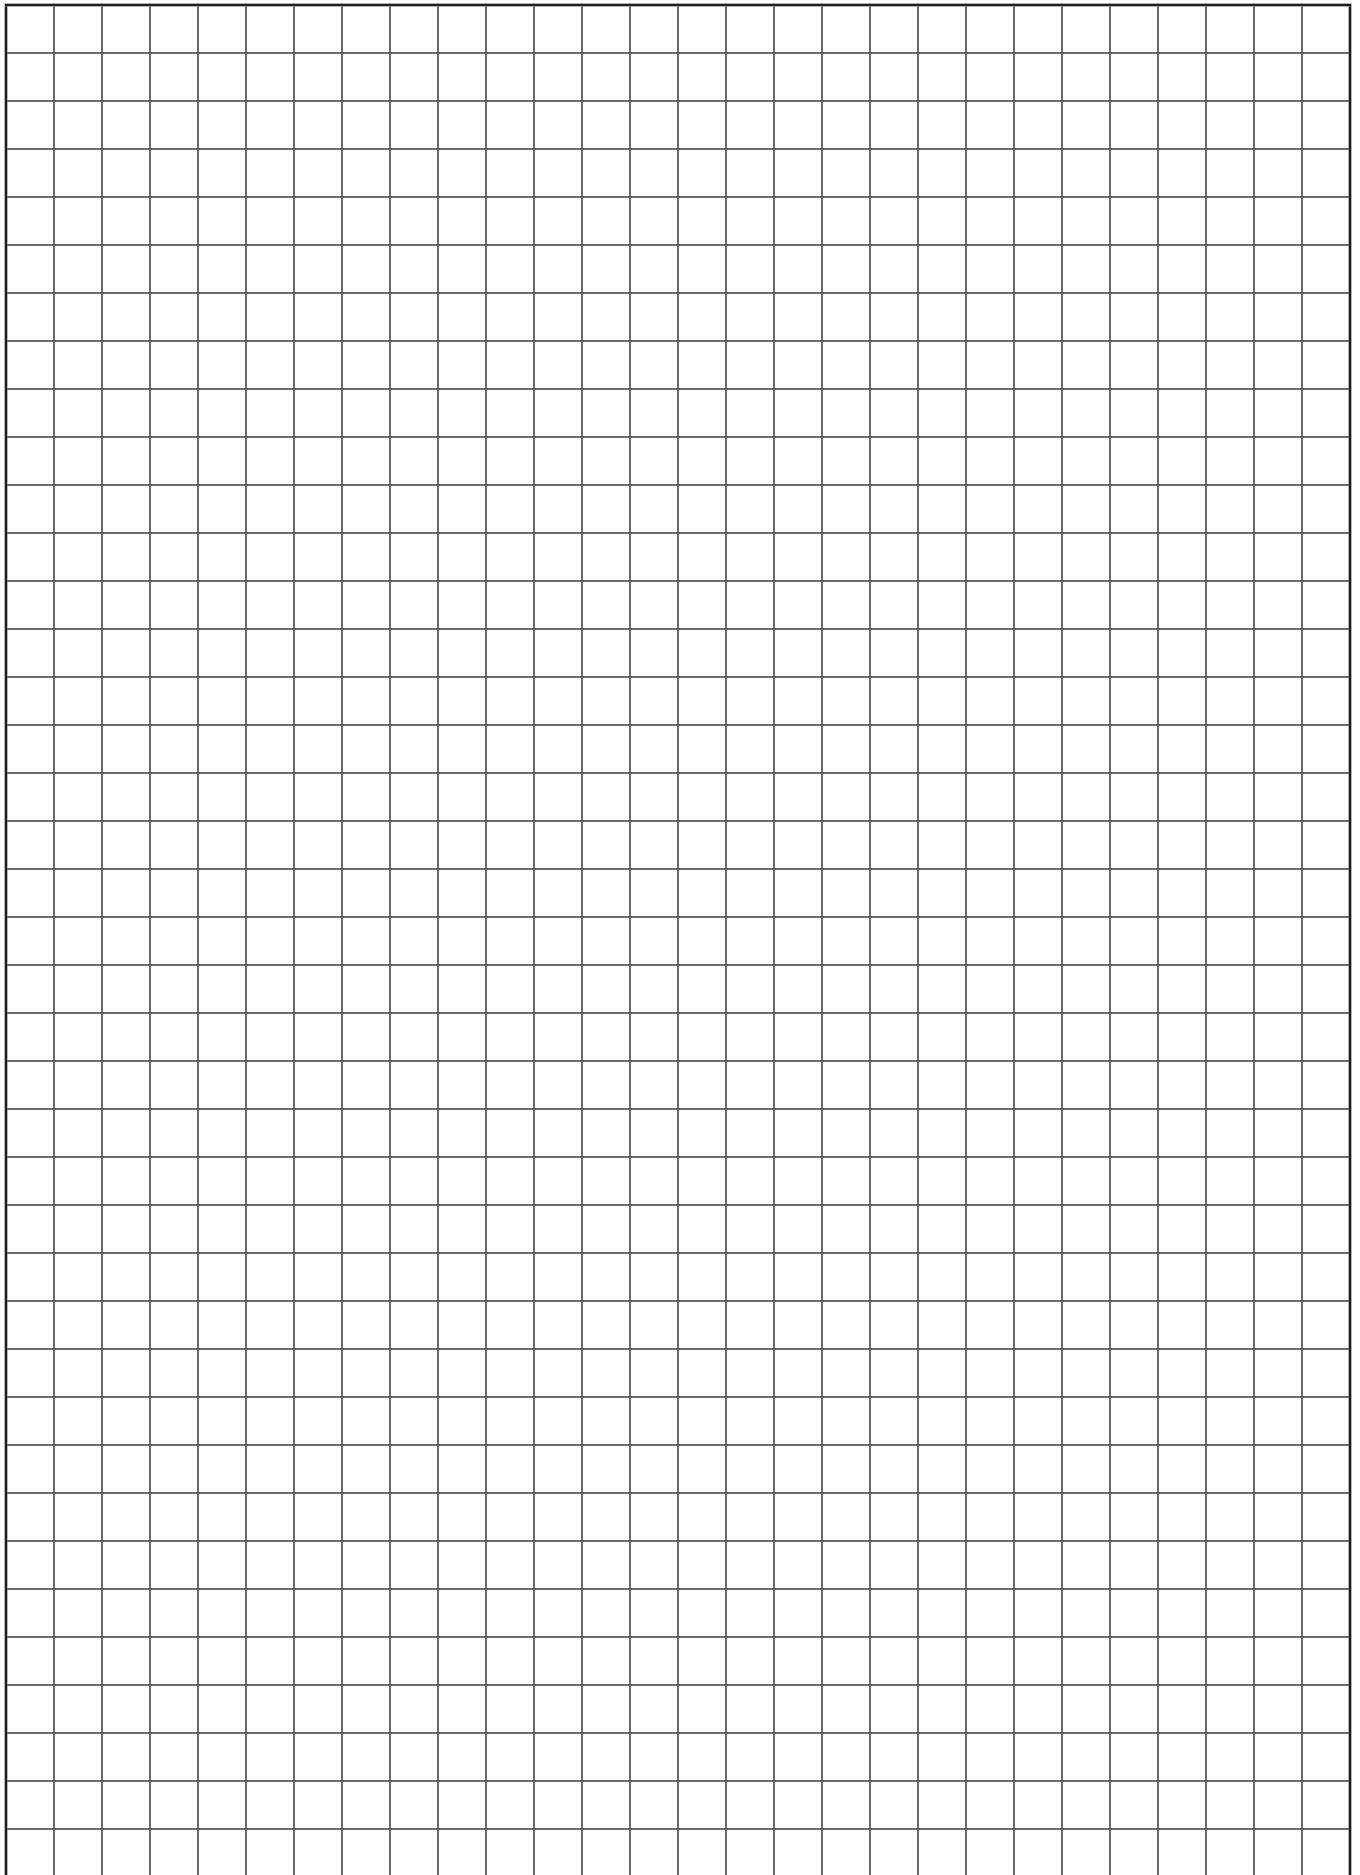



# CELLULAR DECK

# 1.5BP/1.5VLP CELLULAR DECKS GRADE 50 STEEL

ASD




## BP CELLULAR ROOF DECK

- 1.5BP Deck used with TSWs or BPs
- 1.5PLBP Deck used with PunchLok® II System

## VLP CELLULAR COMPOSITE DECK

- 1.5VLP Deck used with TSWs or BPs
- 1.5PLVLP Deck used with PunchLok® II System

## Nominal Dimensions

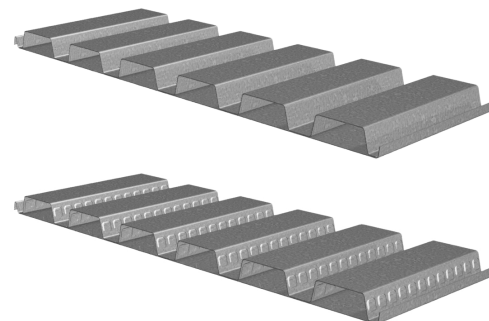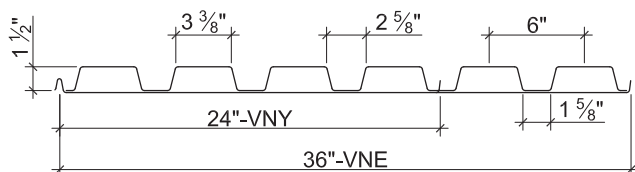

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	36"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.6	0.0358/0.0358	50	0.393	0.293	0.272	0.240	679	599	3207
20/18	4.1	0.0358/0.0474	50	0.428	0.315	0.280	0.259	699	646	3207
18/20	4.1	0.0474/0.0358	50	0.504	0.369	0.405	0.312	1010	778	4209
18/18	4.6	0.0474/0.0474	50	0.551	0.396	0.415	0.330	1035	823	4209
18/16	5.1	0.0474/0.0598	50	0.594	0.423	0.425	0.350	1060	873	4209
16/18	5.3	0.0598/0.0474	50	0.667	0.479	0.579	0.400	1445	998	5261
16/16	5.8	0.0598/0.0598	50	0.721	0.510	0.591	0.421	1475	1050	5261

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
20/XX	1153	1263	1448	1574	2127	2289	1274	1368	1525	1632	2662	2881
18/XX	1931	2105	2398	2588	3586	3831	2297	2454	2716	2887	4546	4884
16/XX	2958	3212	3639	3900	5517	5855	3713	3950	4347	4590	7050	7523

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652, UL, and FM Listed
- Tables conform to ANSI/SDI RD-2017 and C-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes
- Cellular Acoustical Versions

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 1.5BPA/1.5VLP CELLULAR ACOUSTICAL DECKS GRADE 50 STEEL

ASD




## BP CELLULAR ACOUSTICAL ROOF DECK

- 1.5BPA Deck used with TSWs or BPs
- 1.5PLBPA Deck used with PunchLok® II System

## VLP CELLULAR ACOUSTICAL COMPOSITE DECK

- 1.5VPLA Deck used with TSWs or BPs
- 1.5PLVPA Deck used with PunchLok® II System

## Nominal Dimensions

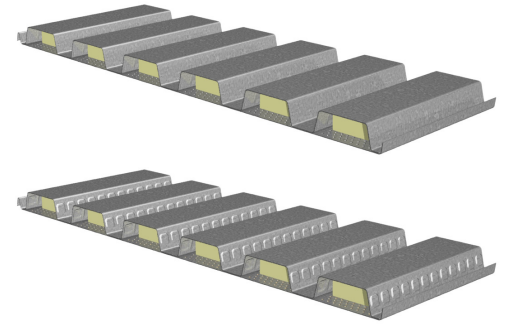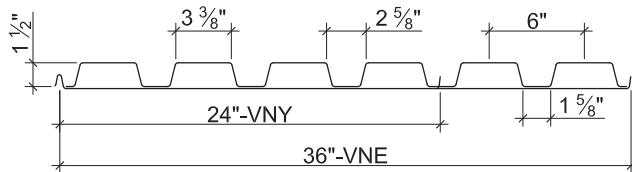

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	36"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.3	0.0358/0.0358	50	0.380	0.293	0.270	0.240	674	599	3207
20/18	3.8	0.0358/0.0474	50	0.414	0.315	0.277	0.259	691	646	3207
18/20	4.0	0.0474/0.0358	50	0.485	0.369	0.400	0.312	998	778	4209
18/18	4.4	0.0474/0.0474	50	0.530	0.395	0.411	0.330	1025	823	4209
18/16	4.9	0.0474/0.0598	50	0.572	0.407	0.420	0.311	1048	776	4209
16/18	5.1	0.0598/0.0474	50	0.641	0.478	0.571	0.400	1425	998	5261
16/16	5.6	0.0598/0.0598	50	0.692	0.492	0.583	0.380	1455	948	5261

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	3"	4"	1 1/2"	2"	3"	4"	3"	4"
20/XX	1153	1263	1448	1574	2127	2289	1274	1368	1525	1632	2662	2881
18/XX	1931	2105	2398	2588	3586	3831	2297	2454	2716	2887	4546	4884
16/XX	2958	3212	3639	3900	5517	5855	3713	3950	4347	4590	7050	7523

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652, UL, and FM Listed
- Tables conform to ANSI/SDI RD-2017 and C-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NP-32/3PLNP-32 CELLULAR DECK GRADE 50 STEEL



ASD

## 32" WIDE 3NP CELLULAR ROOF DECK

- 3NP-32 Deck used with TSWs or BPs
- 3PLNP-32 Deck used with PunchLok® II System

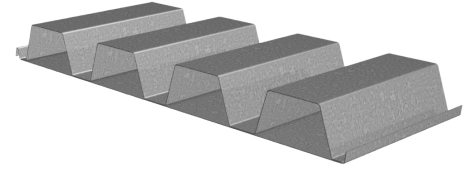

## Nominal Dimensions

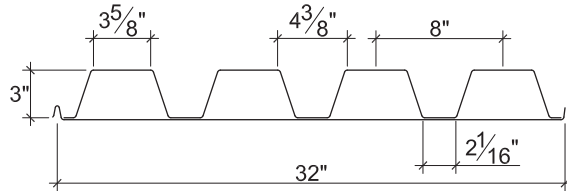

Plant	Cover Width	Pan Connection Method
VNE	32"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.7	0.0358/0.0358	50	1.519	1.153	0.496	0.492	1238	1228	3761
20/18	4.2	0.0358/0.0474	50	1.645	1.248	0.523	0.552	1305	1377	3761
18/20	4.4	0.0474/0.0358	50	1.931	1.460	0.786	0.674	1961	1682	6598
18/18	4.9	0.0474/0.0474	50	2.094	1.568	0.806	0.733	2011	1829	6598
18/16	5.5	0.0474/0.0598	50	2.243	1.699	0.806	0.822	2011	2051	6598
16/18	5.7	0.0598/0.0474	50	2.549	1.901	1.093	0.901	2727	2248	9064
16/16	6.2	0.0598/0.0598	50	2.732	2.046	1.116	0.998	2784	2490	9064

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
20/XX	774	848	972	1077	1697	2101	788	846	944	1026	2014	2529
18/XX	1313	1432	1631	1799	2847	3565	1464	1563	1731	1872	3454	4397
16/XX	2031	2206	2499	2746	4365	5416	2414	2568	2826	3043	5374	6781

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes
- Cellular Acoustical Versions


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NPA-32/3PLNPA-32 CELLULAR ACOUSTICAL DECK GRADE 50 STEEL



ASD

## 32" WIDE 3NPA CELLULAR ACOUSTICAL ROOF DECK

- 3NPA-32 Deck used with TSWs or BPs
- 3PLNPA-32 Deck used with PunchLok® II System

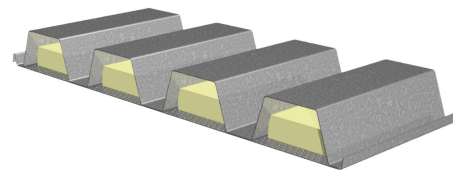

## Nominal Dimensions

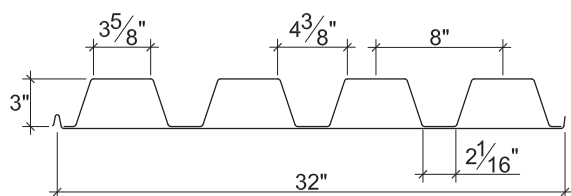

Plant	Cover Width	Pan Connection Method
VNE	32"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.6	0.0358/0.0358	50	1.458	1.152	0.491	0.492	1225	1228	3761
20/18	4.0	0.0358/0.0474	50	1.578	1.247	0.504	0.552	1257	1377	3761
18/20	4.3	0.0474/0.0358	50	1.851	1.459	0.775	0.674	1934	1682	6598
18/18	4.7	0.0474/0.0474	50	2.007	1.567	0.795	0.733	1984	1829	6598
18/16	5.2	0.0474/0.0598	50	2.151	1.636	0.797	0.745	1989	1859	6598
16/18	5.5	0.0598/0.0474	50	2.439	1.900	1.078	0.901	2690	2248	9064
16/16	6.0	0.0598/0.0598	50	2.613	1.980	1.101	0.908	2747	2265	9064

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
20/XX	774	848	972	1077	1697	2101	788	846	944	1026	2014	2529
18/XX	1313	1432	1631	1799	2847	3565	1464	1563	1731	1872	3454	4397
16/XX	2031	2206	2499	2746	4365	5416	2414	2568	2826	3043	5374	6781

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NP-24 CELLULAR DECK GRADE 40 STEEL



ASD

## 24" WIDE 3NP CELLULAR ROOF DECK

- 3NP-24 Deck used with TSWs or BPs
- 3NPLP-24 Deck used with PunchLok® II System

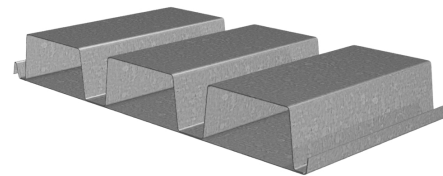

## Nominal Dimensions

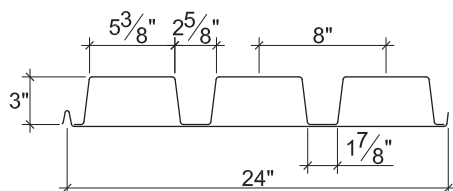

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	24"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.9	0.0358/0.0358	40	1.754	1.420	0.528	0.543	1054	1084	3589
20/18	4.5	0.0358/0.0474	40	1.897	1.564	0.528	0.628	1054	1253	3589
18/20	4.7	0.0474/0.0358	40	2.246	1.774	0.821	0.707	1639	1411	5738
18/18	5.2	0.0474/0.0474	40	2.455	1.938	0.841	0.791	1679	1579	5738
18/16	5.8	0.0474/0.0598	40	2.641	2.136	0.858	0.921	1713	1838	5738
16/18	6.0	0.0598/0.0474	40	3.019	2.323	1.156	0.952	2307	1900	7204
16/16	6.6	0.0598/0.0598	40	3.259	2.543	1.180	1.082	2355	2160	7204

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
20/XX	667	731	838	928	1451	1796	686	737	821	893	1733	2176
18/XX	1130	1233	1404	1548	2433	3047	1269	1355	1501	1623	2967	3777
16/XX	1745	1895	2147	2359	3726	4624	1745	1895	2147	2359	3726	5816

## Standard Features

- ASTM A653 SS GR40 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes
- Cellular Acoustical Versions


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3NPA-24 CELLULAR ACOUSTICAL DECK GRADE 40 STEEL



ASD

## 24" WIDE 3NP CELLULAR ACOUSTICAL ROOF DECK

- 3NPA-24 Deck used with TSWs or BPs
- 3NPLPA-24 Deck used with PunchLok® II System

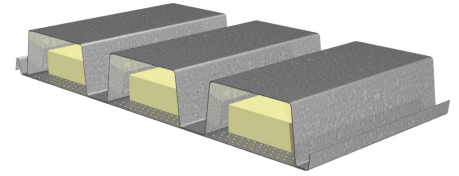

### Nominal Dimensions

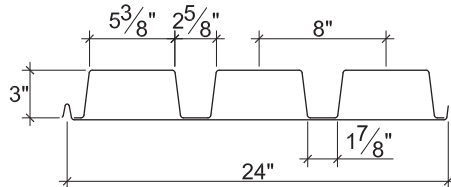

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	24"	Resistance Welds

### Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 40$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.8	0.0358/0.0358	40	1.684	1.419	0.522	0.543	1042	1084	3589
20/18	4.3	0.0358/0.0474	40	1.834	1.563	0.537	0.628	1072	1253	3589
18/20	4.6	0.0474/0.0358	40	2.151	1.773	0.809	0.707	1615	1411	5738
18/18	5.0	0.0474/0.0474	40	2.351	1.937	0.829	0.791	1655	1579	5738
18/16	5.6	0.0474/0.0598	40	2.532	2.035	0.847	0.797	1691	1591	5738
16/18	5.9	0.0598/0.0474	40	2.883	2.321	1.139	0.952	2273	1900	7204
16/16	6.4	0.0598/0.0598	40	3.111	2.434	1.163	0.955	2321	1906	7204

### Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
20/XX	667	731	838	928	1451	1796	686	737	821	893	1733	2176
18/XX	1130	1233	1404	1548	2433	3047	1269	1355	1501	1623	2967	3777
16/XX	1745	1895	2147	2359	3726	4624	1745	1895	2147	2359	3726	5816

### Standard Features

- ASTM A653 SS GR40 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and FM Listed
- Tables conform to ANSI/SDI RD-2017

### Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2VLP CELLULAR COMPOSITE DECK GRADE 50 STEEL



ASD

## 2VLP CELLULAR COMPOSITE DECK

- 2VLP Deck used with TSWs or BPs
- 2PLVLP Deck used with PunchLok® II System

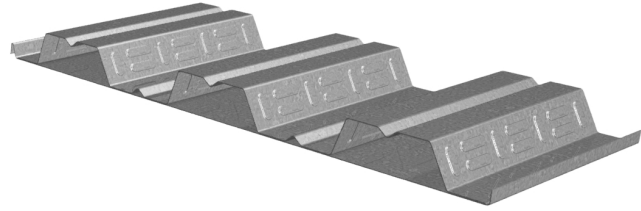

## Nominal Dimensions

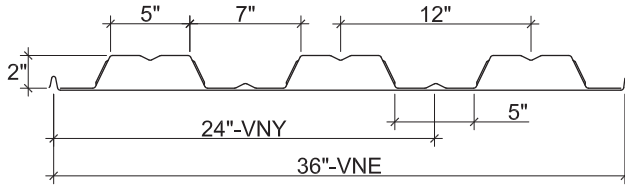

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	36"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.3	0.0358/0.0358	50	0.670	0.491	0.369	0.303	921	756	2419
20/18	3.8	0.0358/0.0474	50	0.714	0.526	0.378	0.341	943	851	2419
18/20	3.9	0.0474/0.0358	50	0.854	0.635	0.547	0.432	1365	1078	3240
18/18	4.4	0.0474/0.0474	50	0.914	0.675	0.556	0.469	1387	1170	3240
18/16	5.0	0.0474/0.0598	50	0.967	0.716	0.565	0.511	1410	1275	3240
16/18	5.0	0.0598/0.0474	50	1.099	0.830	0.731	0.602	1824	1502	4069
16/16	5.6	0.0598/0.0598	50	1.165	0.877	0.742	0.643	1851	1604	4069

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1½"	2"	3"	4"	4"	6"	1½"	2"	3"	4"	4"	6"
20/XX	522	571	655	726	1098	1257	554	595	663	721	1342	1550
18/XX	879	959	1092	1205	1843	2095	1013	1082	1198	1296	2292	2631
16/XX	1354	1470	1666	1830	2825	3194	1654	1759	1936	2085	3554	4059

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes
- Cellular Acoustical Versions


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 2VLP CELLULAR ACOUSTICAL COMPOSITE DECK GRADE 50 STEEL



ASD

## 2VLP CELLULAR ACOUSTICAL COMPOSITE DECK

- 2VLP Deck used with TSWs or BPs
- 2PLVLP Deck used with PunchLok® II System

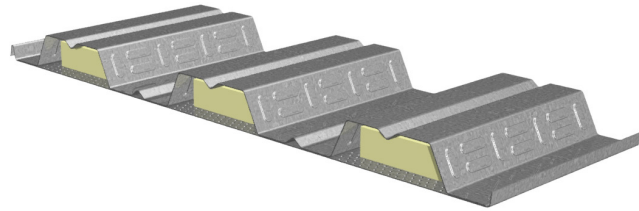

## Nominal Dimensions

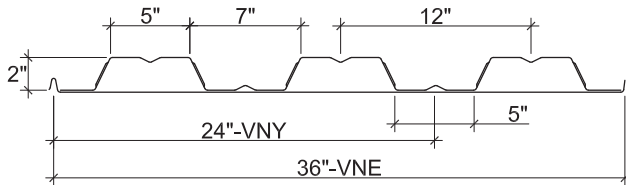

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	36"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.2	0.0358/0.0358	50	0.655	0.491	0.367	0.303	916	756	2419
20/18	3.7	0.0358/0.0474	50	0.699	0.526	0.376	0.341	938	851	2419
18/20	3.8	0.0474/0.0358	50	0.834	0.634	0.543	0.432	1355	1078	3240
18/18	4.3	0.0474/0.0474	50	0.892	0.675	0.553	0.469	1380	1170	3240
18/16	4.8	0.0474/0.0598	50	0.945	0.716	0.562	0.511	1402	1275	3240
16/18	4.9	0.0598/0.0474	50	1.073	0.830	0.726	0.602	1811	1502	4069
16/16	5.4	0.0598/0.0598	50	1.137	0.877	0.737	0.643	1839	1604	4069

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1½"	2"	3"	4"	4"	6"	1½"	2"	3"	4"	4"	6"
20/XX	522	571	655	726	1098	1257	554	595	663	721	1342	1550
18/XX	879	959	1092	1205	1843	2095	1013	1082	1198	1296	2292	2631
16/XX	1354	1470	1666	1830	2825	3194	1654	1759	1936	2085	3554	4059

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3VLP CELLULAR COMPOSITE DECK GRADE 50 STEEL



ASD

## 3VLP CELLULAR COMPOSITE DECK

- 3VLP Deck used with TSWs or BPs
- 3PLVLP Deck used with PunchLok® II System

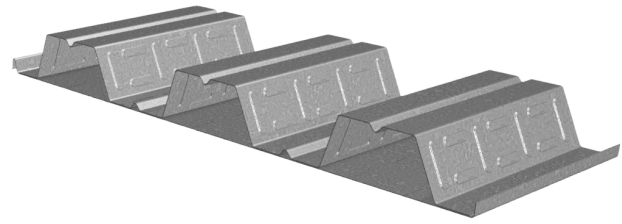

## Nominal Dimensions

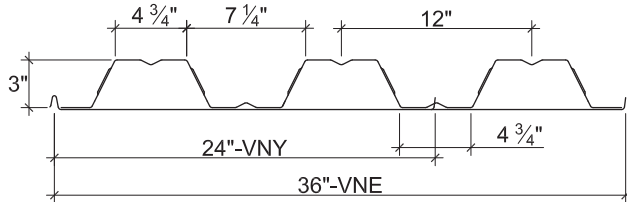

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	36"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.5	0.0358/0.0358	50	1.490	1.082	0.545	0.465	1360	1160	2485
20/18	4.0	0.0358/0.0474	50	1.575	1.152	0.573	0.512	1430	1277	2485
18/20	4.2	0.0474/0.0358	50	1.881	1.398	0.860	0.670	2146	1672	4361
18/18	4.7	0.0474/0.0474	50	2.011	1.477	0.871	0.715	2173	1784	4361
18/16	5.2	0.0474/0.0598	50	2.127	1.579	0.869	0.798	2168	1991	4361
16/18	5.3	0.0598/0.0474	50	2.415	1.820	1.152	0.917	2874	2288	6126
16/16	5.9	0.0598/0.0598	50	2.557	1.932	1.169	1.002	2917	2500	6126

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
20/XX	510	559	640	709	1121	1388	518	556	620	674	1328	1668
18/XX	866	944	1075	1186	1881	2900	963	1028	1138	1231	2279	2900
16/XX	1339	1455	1648	1811	2884	3579	1589	1690	1860	2003	3546	4474

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes
- Cellular Acoustical Versions


NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

# 3VLPA CELLULAR ACOUSTICAL COMPOSITE DECK GRADE 50 STEEL



ASD

## 3VLP CELLULAR ACOUSTICAL COMPOSITE DECK

- 3VLPA Deck used with TSWs or BPs
- 3PLVLP Deck used with PunchLok® II System

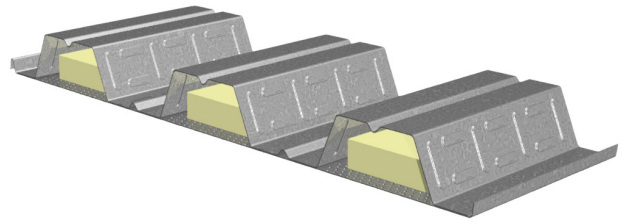

## Nominal Dimensions

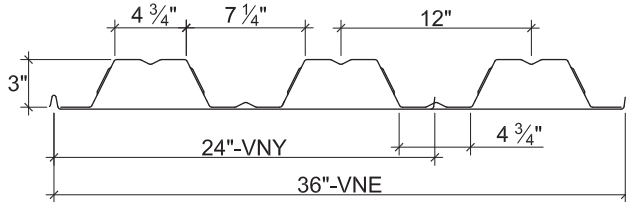

Plant	Cover Width	Pan Connection Method
VNY	24"	Flush Rivets (Underside)
VNE	36"	Resistance Welds

## Section Properties

Deck Gage	Deck Weight $w_{dd}$ (psf)	Base Metal Thickness $t$ (in.)	Yield Strength $F_y$ (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Allowable Moment		Vertical Web Shear $V_n/\Omega$ (lb/ft)
				$I_{d+}$ (in <sup>4</sup> /ft)	$I_{d-}$ (in <sup>4</sup> /ft)	$S_{e+}$ (in <sup>3</sup> /ft)	$S_{e-}$ (in <sup>3</sup> /ft)	$M_{n+}/\Omega$ (lb-ft/ft)	$M_{n-}/\Omega$ (lb-ft/ft)	
20/20	3.4	0.0358/0.0358	50	1.457	1.082	0.543	0.465	1355	1160	2485
20/18	3.9	0.0358/0.0474	50	1.542	1.151	0.571	0.512	1425	1277	2485
18/20	4.1	0.0474/0.0358	50	1.837	1.398	0.853	0.670	2128	1672	4361
18/18	4.5	0.0474/0.0474	50	1.965	1.477	0.866	0.715	2161	1784	4361
18/16	5.0	0.0474/0.0598	50	2.078	1.578	0.864	0.798	2156	1991	4361
16/18	5.2	0.0598/0.0474	50	2.359	1.819	1.142	0.917	2849	2288	6126
16/16	5.7	0.0598/0.0598	50	2.496	1.931	1.159	1.002	2892	2500	6126

## Allowable Reactions at Supports Based on Web Crippling, $R_n/\Omega$ (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
20/XX	510	559	640	709	1121	1388	518	556	620	674	1328	1668
18/XX	866	944	1075	1186	1881	2900	963	1028	1138	1231	2279	2900
16/XX	1339	1455	1648	1811	2884	3579	1589	1690	1860	2003	3546	4474

## Standard Features

- ASTM A653 SS GR50 Min., with G60
- Standard lengths – 6'-0" to 42'-0"
- IAPMO UES ER-0652 and UL Listed
- Tables conform to ANSI/SDI C-2017

## Optional Features

- Inquire regarding cost and lead times for:
  - Short Cuts < 6'-0"
  - Sheet Lengths > 42'-0"
  - Alternative metallic finishes

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.

