


3.5DF-24 FL FORMLOK® DOVETAIL DECK GRADE 50 STEEL



LRFD

3.5DF-24 FL DOVETAIL DECK

- Enhanced 2-Coat Polyester Paint
- White Factory Primer Paint
- Galvanized Finish
- UL Listed

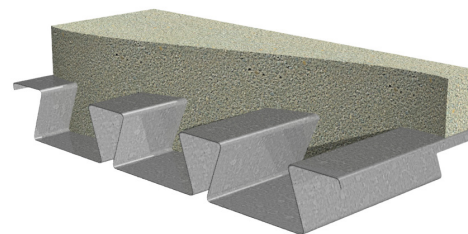

Nominal Dimensions

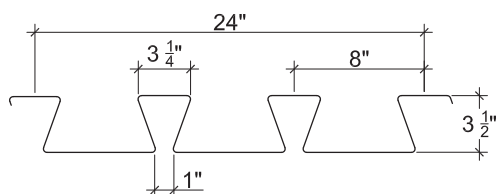

Section Properties

Deck Gage	Deck Weight w_{dd} (psf)	Base Metal Thickness t (in.)	Yield Strength F_y (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Design Moment		Vertical Web Shear ϕV_n (lb/ft)
				I_{d+} (in ⁴ /ft)	I_{d-} (in ⁴ /ft)	S_{e+} (in ³ /ft)	S_{e-} (in ³ /ft)	ϕM_{n+} (lb-ft/ft)	ϕM_{n-} (lb-ft/ft)	
18	4.5	0.0478	50	2.688	2.496	1.055	0.935	3957	3507	10356
16	5.6	0.0598	50	3.430	3.256	1.417	1.289	5314	4835	14868

Design Reactions at Supports Based on Web Crippling, ϕR_n (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading					Two-Flange Loading						
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	2"	3"	4"	5"	4"	6"	2"	3"	4"	5"	4"	6"
18	2241	2553	2815	3046	4363	4960	2435	2695	2915	3108	5269	6048
16	3392	3843	4223	4557	6567	7425	3924	4319	4652	4945	8048	9192

Standard Features

- ASTM A653 SS GR 50 Min. with G90
- Standard lengths – 6'-0" to 40'-0"
- Tables conform to ANSI/SDI C-2017
- IAPMO UES ER-423 and UL Listed

Optional Features

- Inquire regarding cost and lead times for:
 - 17 gage
 - Alternative metallic and painted finishes

3.5DF-24 FL FORMLOK® DOVETAIL DECK-SLAB NORMAL WEIGHT CONCRETE (145 pcf)

LRFD

Slab Depth		Maximum Unshored Spans				Composite Deck-Slab Properties			
		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in ⁴ /ft)	Moment ϕM_{no} (kip-ft/ft)	Shear ϕV_{no} (kip/ft)
Total	Topping		1	2	3				
5½"	2"	18	14'-4"	14'-10"	15'-4"	59.7	15.73	15.68	6.44
		16	15'-2"	17'-4"	17'-6"	60.8	17.27	18.37	6.44
5¾"	2¼"	18	14'-2"	14'-7"	15'-1"	62.7	17.72	16.29	6.73
		16	15'-0"	17'-0"	17'-4"	63.8	19.36	19.77	6.73
6"	2½"	18	14'-0"	14'-4"	14'-9"	65.8	19.88	16.91	7.02
		16	14'-10"	16'-9"	17'-2"	66.9	21.69	20.53	7.02

Notes:

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

Superimposed Design Load, ϕW_n , / Deflection at L/360 (psf) NWC (145 pcf), $f'_c = 3000$ psi

Total Slab Depth	Deck Gage	Span (ft-in.)							
		15'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	18	485/203	362/139	315/117	275/100	241/85	212/74	165/56	129/43
	16	580/223	435/153	380/129	334/110	294/94	260/81	204/62	162/48
5¾"	18	503/229	375/157	326/132	285/112	250/96	220/83	171/63	133/49
	16	626/250	470/172	411/145	361/123	318/105	282/91	222/69	176/54
6"	18	522/257	389/176	338/149	295/126	259/108	227/93	176/71	137/55
	16	649/280	487/192	426/162	374/138	330/118	292/102	230/77	182/60

Notes:

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or ASD design.

3.5DF-24 FL FORMLOK® DOVETAIL DECK-SLAB LIGHT WEIGHT CONCRETE (110 pcf)

LRFD

Slab Depth		Maximum Unshored Spans				Composite Deck-Slab Properties			
		Deck Gage	Maximum Unshored Construction Clear Span			Concrete + Deck (psf)	Deflection $I_d = (I_{cr} + I_u)/2$ (in ⁴ /ft)	Moment ϕM_{no} (kip-ft/ft)	Shear ϕV_{no} (kip/ft)
Total	Topping		1	2	3				
5½"	2"	18	15'-4"	16'-5"	17'-0"	46.4	12.49	14.07	6.44
		16	16'-2"	19'-2"	18'-8"	47.5	13.99	16.76	6.44
5¾"	2¼"	18	15'-1"	16'-2"	16'-8"	48.7	13.90	14.96	6.73
		16	16'-0"	18'-10"	18'-6"	49.8	15.44	17.58	6.73
8"	4½"	18	13'-11"	14'-1"	14'-7"	69.3	34.01	21.47	9.37
		16	14'-8"	16'-6"	17'-0"	70.4	37.13	26.01	9.37

Notes:

1. Maximum unshored spans are based on 20 psf uniform construction live load and 150 plf concentrated construction live load.
2. Maximum unshored spans do not consider web-crippling. Required bearing should be determined based on specific span conditions.

Superimposed Design Load, ϕW_n , / Deflection at L/360 (psf) LWC (110 pcf), $f'_c = 3000$ psi

Total Slab Depth	Deck Gage	Span (ft-in.)							
		15'-0"	17'-0"	18'-0"	19'-0"	20'-0"	21'-0"	23'-0"	25'-0"
5½"	18	444/161	333/111	291/93	256/79	225/68	199/58	157/44	124/34
	16	539/181	407/124	356/104	314/89	278/76	247/66	196/50	157/39
5¾"	18	473/180	355/123	311/104	273/88	240/75	213/65	167/49	133/38
	16	565/199	426/137	374/115	329/98	291/84	259/72	206/55	165/43
8"	18	680/440	511/302	446/254	392/216	346/185	306/160	241/122	191/95
	16	840/480	635/330	557/278	491/236	435/202	387/175	308/133	248/103

Notes:

1. For high loads long term concrete creep should be considered.
2. See Composite Deck-Slab Superimposed Load tool for alternate slabs or ASD design.

3.5DF-24 FL FORMLOK® DOVETAIL DECK-SLAB

LRFD

3.5DF-24 FL Deck-Slab Information

$f'_c = 3000$ psi

Total Slab Depth (in.)	Cover Depth (in.)	Theoretical Concrete Volume (yd ³ /100 ft ²)	Min. A _s for T&S (in. ²)	Recommended Reinforcing for Temperature and Shrinkage	
				WWR	(OR) Bekaert Dramix® Steel Fiber Alternate to WWR (lb/yd ³)
				4D 65/60BG	
Normal Weight Concrete (145 pcf)					
5½	2	1.41	0.028	6x6-W1.4xW1.4	23
5¾	2¼	1.49	0.028	6x6-W1.4xW1.4	20
6	2½	1.56	0.028	6x6-W1.4xW1.4	18
6½	3	1.72	0.028	6x6-W1.4xW1.4	15
7	3½	1.87	0.032	6x6-W2.1xW2.1	15
7¼	3¾	1.95	0.034	6x6-W2.1xW2.1	15
7½	4	2.03	0.036	6x6-W2.1xW2.1	15
8	4½	2.18	0.041	6x6-W2.1xW2.1	15
Light Weight Concrete (110 pcf)					
5½	2	1.41	0.028	6x6-W1.4xW1.4	33
5¾	2¼	1.49	0.028	6x6-W1.4xW1.4	28
6	2½	1.56	0.028	6x6-W1.4xW1.4	25
6½	3	1.72	0.028	6x6-W1.4xW1.4	20
7	3½	1.87	0.032	6x6-W2.1xW2.1	20
7½	4	2.03	0.036	6x6-W2.1xW2.1	20
8	4½	2.18	0.041	6x6-W2.1xW2.1	20

Notes:

1. FRC reinforcement is based on IAPMO UES ER-465.
2. Dramix® fibers may be used in UL or ULC fire rated assemblies in lieu of WWR. See UL file R19307 for additional information.

For information on Bekaert Dramix® fibers contact 770-514-2295 or infobuilding@bekaert.com.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.